



# WQ14


## 2-Megapixel Indoor IR IP Micro Dome Camera

### Features:

- 2-Megapixel CMOS sensor
- 15fps @ 1600 x 1200 resolution
- Day & Night function with built-in IR cut filter
- Built-in 24V POE input for data and power transmitting
- Built-in IR illuminator, effective up to 5 meters
- Supports H.264 dual streams
- Supports adaptive frame rate streaming
- 2D / 3D noise reduction
- Stylish and compact housing design



### Dimension:

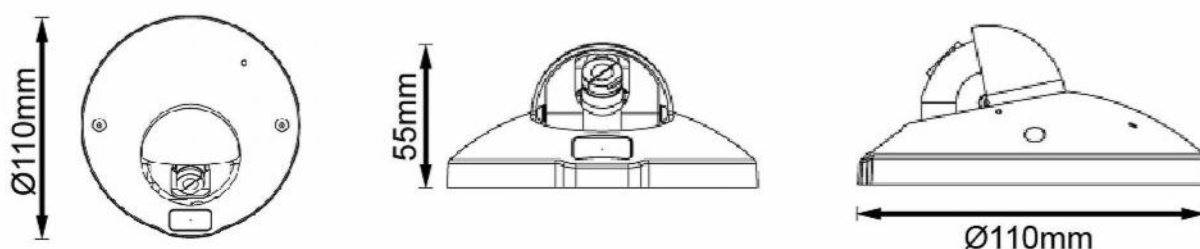

# WQ14



## 2-Megapixel Indoor IR IP Micro Dome Camera

SYSTEM SPECIFICATION	
System	ALTERA Cyclone IV, 8MB Flash ROM, 128MB DDRIII
Compression	H.264
Resolution	Main Stream: 1600x1200, Sub Stream: 640x400
Frame Rate	15 fps at all resolutions
Image Sensor	1/3.2" 2Megapixel CMOS sensor
Lens	3.6mm@F1.8
Minimum Illumination	0 Lux (IR On)
IR Illuminators	up to 5 meters
IMAGE SETTINGS	
Day / Night mode	ICR (Removable IR-cut filter) for day & night vision
Image Adjustment	Brightness, Contrast, Saturation, Gain Control (x3.5)
Image Orientation	Flip, Mirror, 180° Rotation
EVENT	
Trigger	Motion detection
Action	Email, Buzzer, Pop-up Channel
NETWORK	
Ethernet	10/ 100 Base-T
Protocols	IPv4, HTTP, SMTP, DHCP, NTP, TCP/IP, UPnP, DNS, DDNS, PPPoE
POWER SUPPLY	
DC Adapter (Optional)	DC 5V
PoE	by Dynacom DN408
OPERATING ENVIRONMENT	
Temperature	0°C ~ 45°C (32°F~113°F)
Humidity	0% ~ 90% (non-condensing)
APPEARANCE	
SD Card	Up to 32 GB
Dimension	Ø110mm x 55mm
Weight	190 Grams
Connectors	RJ45 Ethernet connector
	5V DC Jack
CLIENT SYSTEM	
Mobile App	MobileViewHD (iOS/Android)
NVR	Dynacom DN408