


# WQ2X SERIES


2 Megapixel Outdoor IR 15M Bullet IP Camera

## Features:

- 2 Megapixel CMOS Sensor
- Max. 1600 x 1200 @ 15 FPS
- Dual-streaming (2M + 640x400)
- Plug & Play Easy Installation
- Support PoE function
- All 3G Mobile Supported ( iOS / Android)
- 2D + 3D Noise Reduction
- Max. Sense-up 3.5x (Default 2x)
- Day and night function with built-in IR cut filter
- Built-in IR illuminators, IR working distance up to 15M

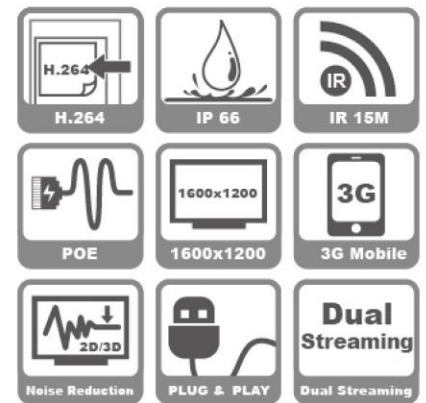

## Dimension:

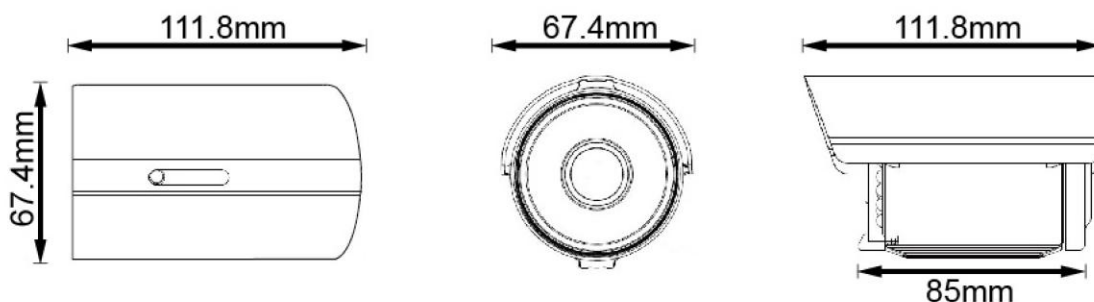

# WQ2X SERIES



## 2 Megapixel Outdoor IR 15M Bullet IP Camera

Model	WQ24	WQ26	WQ28
<b>SYSTEM SPECIFICATION</b>			
System	ALTERA Cyclone IV, 8MB Flash ROM, 128MB DDRIII		
Compression	H.264		
Resolution	Main Stream: 1600x1200, Sub Stream: 640x400		
Frame Rate	15 fps at all resolutions		
Image Sensor	1/3.2" 2Megapixel CMOS sensor		
Lens	3.6mm@F1.8	6mm@F1.8	3.8mm@F2.0
Minimum Illumination	0 Lux (IR On)		
IR Illuminators	Up to 15 meters		
<b>IMAGE SETTINGS</b>			
Day / Night mode	ICR (Removable IR-cut filter) for day & night vision		
Image Adjustment	Brightness, Contrast, Saturation, Gain Control (x3.5)		
Image Orientation	Flip, Mirror, 180° Rotation		
<b>EVENT</b>			
Trigger	Motion detection, Video Loss		
Action	Email, Buzzer, Pop-up Channel		
<b>NETWORK</b>			
Ethernet	10 / 100 Base-T		
Protocols	IPv4, HTTP, SMTP, DHCP, NTP, TCP/IP, UPnP, DNS, DDNS, PPPoE		
<b>POWER SUPPLY</b>			
DC Adapter (Optional)	DC 5V, Max: 4W		
PoE	by UN65 series NVR, Max: 4.5W		
<b>OPERATING ENVIRONMENT</b>			
Temperature	0°C ~ 40°C (32°F~104°F)		
Humidity	0% ~ 90% (non-condensing)		
<b>APPEARANCE</b>			
SD Card	Up to 32 GB		
Dimensions (L x W x H)	111.8mm x 67.4mm (with sunshield), Ø61		
Weight	415 Grams (without stand)		
Connectors	RJ45 Ethernet connector		
	5V DC Jack		
<b>CLIENT SYSTEM</b>			
Mobile App	MobileViewHD ( iOS/Android )		
NVR	UN65 series		