



# C2C (Mini 0)

## Simple but Powerful

An HD 720p Wi-Fi camera with a magnetic base, designed for simple and quick installation.

## Key Features

**HD**

720p



Supports MicroSD card slot, up to 128GB



Supports 2.4GHz Wi-Fi (IEEE802.11b, 802.11g, 802.11n)



Two-way audio



True Day/Night camera with auto-switching. Infrared night vision up to 7.5 meters.



## Easy installation

---

The C2C (Mini O) comes with a magnetic base and mounting kit for easy placement on walls or ceilings. Once set up, you can manually adjust it to cover just about any angle you need.



## HD 720p video with a wide-angle lens

---

The C2C (Mini O) delivers HD 720p video and extensive coverage with a 111° wide-angle lens, so you can keep an eye on what's valuable to you.



# Keep them safe, day and night

When it's dark, the C2C (Mini O) automatically switches to night vision mode for around-the-clock HD video coverage. The lens is ringed with infrared lights for night vision up to 7.5 meters.




# Instant alerts (manual activation required)

The C2C (Mini O) watches for movement. It will take a picture and send alerts to your smartphone when it detects motions.



# Two-way audio

The camera comes with a built-in microphone and speaker, enabling two-way audio via the camera and your phone or tablet.

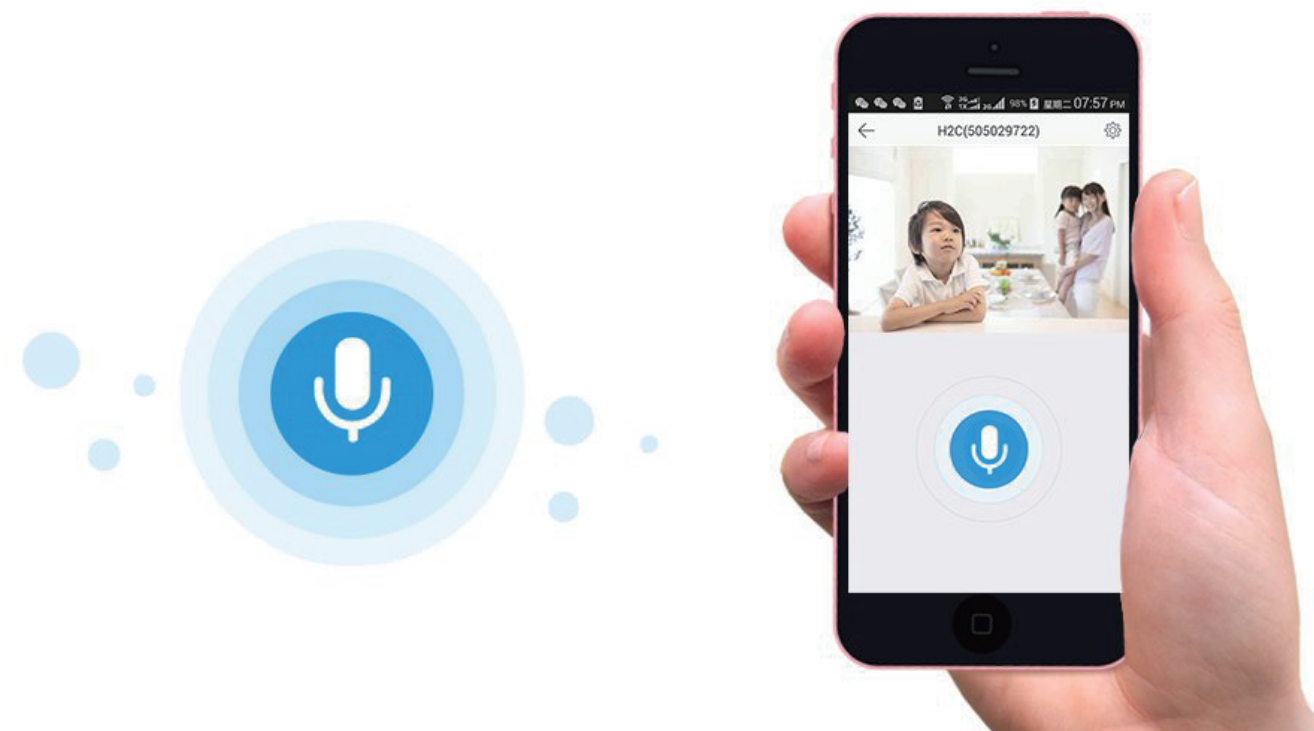

# Specifications Model CS-CV206-C0-1A1WFR

## Camera

Image Sensor	1/4" 1MP HD Progressive Scan CMOS
Shutter Speed	Self-adaptive shutter
Lens	2.8mm@F2.5, view angle: 90°, Diagonal View Angle: 111°
Lens Mount	M12
Day & Night	IR-cut filter with auto-switching
DNR	3D DNR
WDR	Digital WDR

## Compression

Video Compression	H.264
H.264 Type	Main Profile
Video Bit Rate	HD, Balanced and Smooth. Adaptive bit rate.

## Image

Max. Resolution	1280×720
Image Settings	Brightness, contrast, saturation, etc. (configurable via EZVIZ Studio)
BLC	Support

## Network

Storage	Supports MicroSD card (max. 128GB)
Smart Alarm	Motion detection
Wi-Fi Pairing Protocol	SmartConfig (Wi-Fi One-Key Configuration)/AP pairing
Interface Protocol	EZVIZ Cloud proprietary protocol
General Features	Anti-Flicker, Dual-Stream, Heartbeat Messages, Mirror Image, Password Protection, Watermark
Minimum Network Requirements	1Mbps

## Wi-Fi

Standard	IEEE802.11b, 802.11g, 802.11n
Frequency Range	2.4 GHz ~ 2.4835 GHz
Channel Bandwidth	Supports 20MHz
Security	64/128-bit WEP, WPA/WPA2, WPA-PSK/WPA2-PSK
Transmission Rate	11b: 11Mbps, 11g: 54Mbps, 11n: 150Mbps

## General

Power Supply	DC 5V±10%
Power Consumption	MAX. 3W
IR Range	MAX. 7.5 meters
Product Dimensions	128mm x 58mm x 38mm (0.42ft x 0.19ft x 0.12ft)
Packaging Dimensions	149mm x 91.5mm x 87.5mm
Weight	0.265 lb. (120g)

## Package Contents:

- C2C (Mini O) X 1
- 3 Meters USB Cable X 1
- Power Adapter X 1
- Foam Sticker X 2
- Metal Plate (3.5mm Hole Diameter) X 1
- Quick Start Guide X 1

## Requirements

- Operating Conditions: -10°C ~ 50°C, Humidity 95% or less (non-condensing)

## Certificates

FCC/UL/IC/NOM/CE/RoHS/WEEE/REACH

Specifications are subject to change without notice. EZVIZ is a registered trademark of Hangzhou EZVIZ Network Co., Ltd.  
Other brands and product names are trademarks or registered trademarks of their respective holders.

<https://www.ezvizlife.com/>