


32Ch. Rack-mountable NVR



Key Features

32Ch. Streaming


Real time live viewing
Max. 120fps @ FULL-HD(1920x1080), 480fps @ D1(720x480/720x576)

Real time recording
Max. 480fps @ FULL-HD(1920x1080)

Supports H.264 / MJPEG codec
Video, Audio, PTZ control

Supports RAID 5
1 HDMI / 1 VGA output for local display
3 USB port for mouse / keyboard etc (USB 2.0 x 2 / USB 3.0 x 1)
24TB (Max. 6TB x 4HDD) support

Dimensions

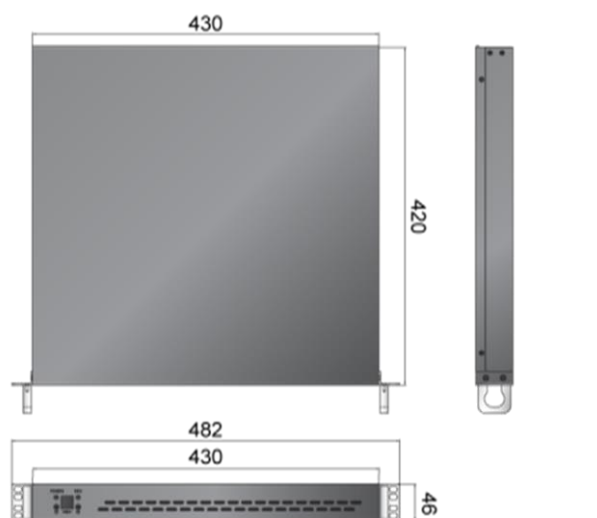

Accessory

FWR214-01N

NVR	
Max Channel	32Ch. IP cameras
Video	
Max. Streaming Rate	Max 120fps @ FULL-HD, Max 480fps @ D1
Supported Codec	H.264 / MJPEG
Streaming Function	Retransmission (Proxy)
PTZ	Remote PTZ control
Recording	
Max. Recording Rate	Max 480fps @ Full HD
Stream	Video, Audio, Data
HDD Support	Supports 4 SATA HDDs up to 6TB / each (Max.24TB)
RAID	RAID 5
Condition	Always, Motion, Event, Schedule
Interface	
Video Out	1 HDMI, 1 VGA,
Audio In/Out	2 way (1 in, 1 out)
Audio Compression	8bit G.711, 8Khz, 8Kbyte/sec
Alarm In/Out	NO
Serial Port	(RS-232C), RS-485
Peripherals	USB 2.0 x 2 + USB3.0 x 1
Network	
WAN (Ethernet)	10/100/1000-base-T Ethernet (auto sensing)
Protocol	HTTP, TCP/IP, UDP, FTP, Telnet, RARP, PPPoE, PAP, CHAP, DHCP, NTP, SMTP client, uPNP And etc.
Viewer	Browsers (IE, Firefox, Safari etc), CMS, Quick Time, VLC
Player	Browsers (IE, Firefox, Safari etc), CMS,
Dynamic IP	DDNS (www.ipcctvdns.com)
Smart Solution	IPCAMVISION (IOS, Android)
Security	Encrypted & Basic Authentication
Hardware	
System	32bit Embedded Linux, 2 G byte SDRAM, 128MBytes NAND Flash
Approvals	KC, FCC, CE, RoHS, UL
Working Condition	0°C ~ +50°C (32°F ~ 122°F), 10% ~ 80% RH
Power Supply	INPUT : 100-240VAC, 50-60Hz OUTPUT : SMPS, 12VDC @ 7A
Power Consumption	Max. 40W
Dimension	430(W) x 420(D) x 45(H) mm
Weight	About 5,500g without HDD