


## DS-2CC1112/1172/1182/1192P(N)(-A) Box Camera / HD Box Camera



- 1/3" SONY CCD
- Day & Night Auto Switch
- Up to 650 TVL horizontal resolution
- Auto iris with DC/video driver



Unit: mm

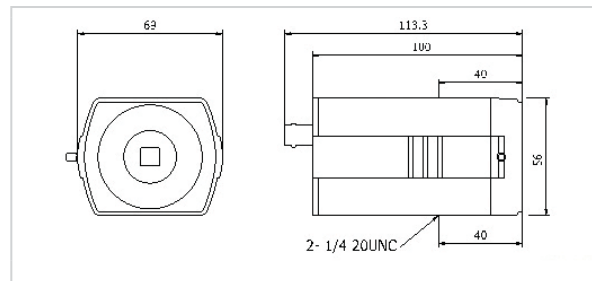

### Specifications

		DS-2CC1112P(N)(-A)	DS-2CC1172P(N)(-A)	DS-2CC1182P(N)(-A)	DS-2CC1192P(N)(-A)
Camera	Image Sensor	1/3" SONY Super HAD CCD II			1/3" SONY EXView HAD CCD II
	Signal System	PAL / NTSC			
	Effective Pixels	PAL: 752 (H) × 582 (V) NTSC: 768 (H) × 494 (V)			PAL: 976 (H) × 582 (V) NTSC: 976 (H) × 494 (V)
	Min. Illumination	0.1 Lux @ (F1.2, AGC ON)			
	Shutter Time	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s			
	Lens Mount	C/CS mount			
	Auto Iris	DC/Video drive			
	Day & Night	Electronic			
	Horizontal Resolution	480 TVL	540 TVL	600 TVL	650 TVL
	Synchronization	Internal synchronization (-A series support Internal/Power synchronization)			
Video Output	1Vp-p composite output (75 Ω / BNC)				
S/N Ratio	More than 52 dB				
General	Operating Conditions	-10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)			
	Power Supply	12 V DC ± 10% (-A series support 12 V DC / 24 V AC ± 10%)			
	Power Consumption	Max. 2 W (-A series Max. 3 W)			
	Dimension	69 x 56 x 113.3 mm (2.72" × 2.20" × 4.46")			
	Weight	400 g (0.88 lbs)			

### Available Models

PAL: DS-2CC1112P, DS-2CC1172P, DS-2CC1182P, DS-2CC1192P; DS-2CC1112P-A, DS-2CC1172P-A, DS-2CC1182P-A, DS-2CC1192P-A;  
NTSC: DS-2CC1112N, DS-2CC1172N, DS-2CC1182N, DS-2CC1192N; DS-2CC1112N-A, DS-2CC1172N-A, DS-2CC1182N-A, DS-2CC1192N-A;