




## DS-2CC102/112/192P(N)-IRT IR Bullet Camera

- 1/3" SONY CCD
- Vari-focal lens with auto focus. Wireless remote with zooming function
- Compact Structure Design
- Minimum Illumination: 0.1Lux @ F1.2 (0 Lux With IR)

Unit: mm

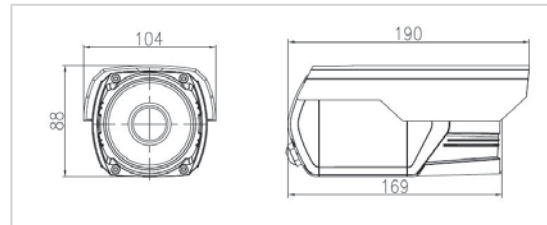

### Specifications

	DS-2CC102P(N)-IRT	DS-2CC112P(N)-IRT	DS-2CC192P(N)-IRT	
Camera	Image Sensor	1/3" SONY CCD		
	Signal System	PAL/NTSC		
	Effective Pixels	PAL: 500 (H) × 582 (V) NTSC: 510 (H) × 492 (V)	PAL: 752 (H) × 582 (V) NTSC: 768 (H) × 494 (V)	
	Min. Illumination	0.1 Lux @ (F1.2, AGC ON), 0 Lux with IR 0.2 Lux @ (F1.8, AGC ON), 0 Lux with IR		
	Shutter Time	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s		
	Lens	4 - 9 mm @ F1.8 (5 - 15 mm optional), Adjusted by Remote Control Angle of view: 60° - 30° (4 - 9 mm)		
	Lens Mount	Φ14		
	Day & Night	Electronic		
	Horizontal Resolution	420 TVL	480 TVL	540 TVL
	Synchronization	Internal synchronization		
Video Output	1 Vp-p composite output (75Ω /BNC)			
S/N Ratio	More than 48 dB			
BLC	On			
General	Operating Conditions	-10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)		
	Power Supply	12 V DC ± 10%, 24 V AC ± 10%		
	Power Consumption	Max. 13 W		
	Weather Proof Rating	IP66		
	IR Range	Approx 30 to 40 meters		
	Dimension	104.2 × 87.8 × 190.1 mm (4.10" × 3.46" × 7.48")		
Weight	1000 g (2.20 lbs)			

### Available Models

DS-2CC102P-IRT, DS-2CC102N-IRT, DS-2CC112P-IRT, DS-2CC112N-IRT, DS-2CC192P-IRT, DS-2CC192N-IRT