


# DS-2CC5102/5112/5172/5192P(N) Indoor Dome Camera

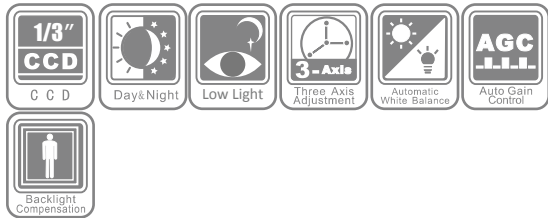

## Key features

- High performance Sony CCD
- Low illumination
- Day / night auto switch
- 3-axis adjustment
- Compact design

## Specifications

	DS-2CC5102P(N)	DS-2CC5112P(N)	DS-2CC5172P(N)	DS-2CC5192P(N)
<b>Camera</b>				
Image sensor	1/3" SONY Super HAD CCD II	1/3" SONY Super HAD CCD II	1/3" SONY Super HAD CCD II	1/3" SONY EXView HAD CCD II
Signal system	PAL / NTSC			
Effective pixels	PAL: 500 (H) × 582 (V) NTSC: 510 (H) × 492 (V)	PAL: 752 (H) × 582 (V) NTSC: 768 (H) × 494 (V)	PAL: 752 (H) × 582 (V) NTSC: 768 (H) × 494 (V)	PAL: 976 (H) × 582 (V) NTSC: 976 (H) × 494 (V)
Min. illumination	0.1 Lux @ (F1.2, AGC ON) 0.28 Lux @ (F2.0, AGC ON)	0.1 Lux @ (F1.2, AGC ON) 0.28 Lux @ (F2.0, AGC ON)	0.1 Lux @ (F1.2, AGC ON) 0.28 Lux @ (F2.0, AGC ON)	0.001 Lux @ (F1.2, AGC ON) 0.0028 Lux @ (F2.0, AGC ON)
Shutter time	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s			
Lens	3.6 mm @ F2.0 (2.8 mm, 6 mm, 8 mm, 12 mm, 16 mm optional) Angle of view: 78° (3.6 mm)			
Lens mount	M12			
Angle adjustment	Pan: 0 ~ 355°, tilt: 0 ~ 90°, rotation: 0 ~ 355°			
Day & night	Electronic			
Horizontal resolution	420 TVL	480 TVL	540 TVL	650 TVL
Synchronization	Internal synchronization			
Video output	1Vp-p composite output (75 Ω / BNC); Test monitor out [1Vp-p composite output (75 Ω / BNC), device line]			
S/N ratio	More than 50dB	More than 52 dB	More than 52 dB	More than 62 dB
<b>General</b>				
Operating conditions	-10°C ~ 60°C (14°F ~ 140°F) Humidity 90% or less (non-condensing)			
Power supply	12 VDC ± 10%			
Power consumption	2W max.			
Dimensions	Φ 97.8 x 64.4 mm (φ 3.85" x 2.54")			
Weight	300g (0.66 lbs)			

## Available models

DS-2CC5102P, DS-2CC5102N  
 DS-2CC5112P, DS-2CC5112N  
 DS-2CC5172P, DS-2CC5172N  
 DS-2CC5192P, DS-2CC5192N

## Dimensions

