




## DS-2CC511/591P(N)-A Vari-focal Dome Camera

- Compact design
- 1/3" SONY CCD
- Day/night auto switch
- Auto white balance, auto gain control, electronic shutter control, and backlight compensation

Unit: mm

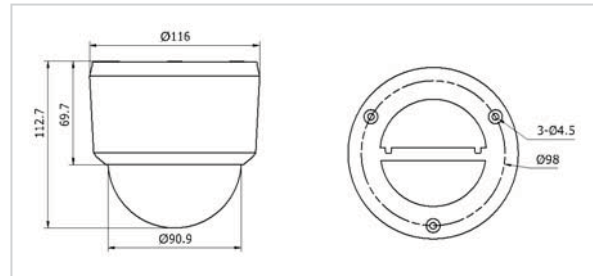

### Specifications

		DS-2CC511P(N)-A	DS-2CC591P(N)-A
Camera	Image Sensor	1/3" SONY CCD	
	Signal System	PAL/NTSC	
	Effective Pixels	PAL: 752 (H) × 582 (V) NTSC: 768 (H) × 494 (V)	
	Min. Illumination	0.1 Lux @ (F1.2, AGC ON)	
	Shutter Time	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s	
	Lens	3.5 - 9 mm @ F1.2 (2.8 - 11 mm optional) Angle of view: 80° - 30°(3.5 - 9 mm)	
	Lens Mount	Φ14	
	Auto Iris	DC Drive	
	Angle Adjustment	Pan: 0 - 355°; Tilt: 0 - 80°; Rotation: 0 - 140°;	
	Day & Night	Electronic	
	Horizontal Resolution	480 TVL	540 TVL
	Synchronization	Internal synchronization	
	Video Output	1Vp-p composite output (75 Ω/BNC)	
	S/N Ratio	More than 48 dB	
BLC	On/Off		
General	Operating Conditions	-10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)	
	Power Supply	24 V AC ± 10%, 12 V DC ± 10%	
	Power Consumption	Max. 3.5 W	
	Dimension	Φ 122.8 × 109.1 mm (φ 4.83" × 4.30")	
	Weight	400 g (0.88 lbs)	

### Available Models

DS-2CC511P-A, DS-2CC511N-A, DS-2CC591P-A, DS-2CC591N-A