




Unit: mm

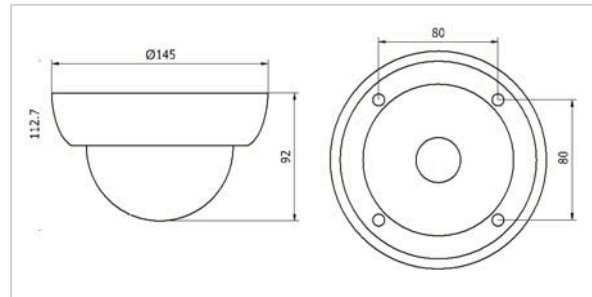

## Specifications

	DS-2CC502P(N)-FB	DS-2CC512P(N)-FB	DS-2CC592P(N)-FB	
Camera	Image Sensor	1/3" SONY CCD		
	Signal System	PAL/NTSC		
	Effective Pixels	PAL: 500 (H) × 582 (V) NTSC: 510 (H) × 492 (V)	PAL: 752 (H) × 582 (V) NTSC: 768 (H) × 494 (V)	
	Min. Illumination	0.1 Lux @ (F1.2, AGC ON) 0.18 Lux @ (F1.6, AGC ON)		
	Shutter Time	PAL: 1/50 s to 1/100,000 s NTSC: 1/60 s to 1/100,000 s		
	Lens	4 - 9 mm @ F1.6 Angle of view: 74.6° - 32°		
	Lens Mount	M12		
	Angle Adjustment	Pan: 0 - 355°; Tilt: 0 - 90°;		
	Day & Night	Electronic		
	Horizontal Resolution	420 TVL	480 TVL	540 TVL
	Synchronization	Internal synchronization		
	Video Output	1Vp-p composite output (75 Ω/BNC)		
	S/N Ratio	More than 48 dB		
BLC	On			
General	Operating Conditions	-10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)		
	Power Supply	12 V DC ± 10%		
	Power Consumption	Max. 2 W		
	Impact Protection	IEC 60068-2-75 test, Eh, 50J; EN 50102, up to IK10.		
	Dimension	Φ 145 × 92 mm (φ 5.71" × 3.62")		
	Weight	660 g (1.46 lbs)		

## Available Models

DS-2CC502P-FB, DS-2CC502N-FB, DS-2CC512P-FB, DS-2CC512N-FB, DS-2CC592P-FB, DS-2CC592N-FB