


## DS-2CD855F-E 2MP Low-light Network Box Camera



### Key features

- 2 mega-pixel (1920 x 1080) high resolution
- Full HD1080p real-time video recording
- True day / night
- Super low light
- Auto iris with DC Drive
- PoE
- 3D noise digital reduction

### Dimensions

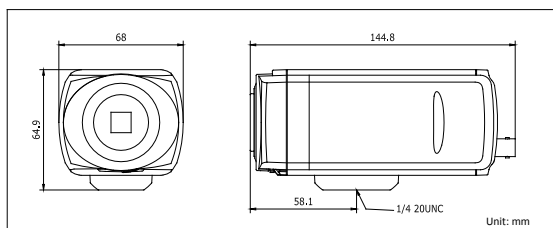

### Specifications

DS-2CD855F-E	
<b>Camera</b>	
Image sensor	1/3" Progressive Scan CMOS
Min. illumination	Color: 0.05 lux @ (F1.2, AGC ON) B/W: 0.005 lux @ (F1.2, AGC ON)
Shutter time	1/25s ~ 1/100,000s
Lens mount	C/CS mount
Auto iris	DC drive
Day & night	IR cut filter with auto switch
Digital noise reduction	3D DNR
<b>Compression standard</b>	
Video compression	H.264 / MPEG4 / MJPEG
Bit rate	32 Kbps ~ 16 Mbps
Audio compression	G.711 / G.726
Dual stream	Yes
<b>Image</b>	
Max. resolution	1920 × 1080
Frame rate	50 Hz: 25 fps (1920 × 1080) 60 Hz: 30 fps (1920 × 1080)
Image settings	Saturation, brightness, contrast adjustable through client software or web browser
<b>Network</b>	
Network storage	NAS (iSCSI optional)
Alarm trigger	Motion detection, tampering alarm, network disconnect, IP address conflict, storage exception
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP, RTSP, PPPoE, SMTP, NTP, SNMP, HTTPS, FTP, 802.1x, Qos (SIP, SRTP, IPv6 optional)
Security	User authentication, watermark
System compatibility	ONVIF, PSIA, CGI
<b>Interface</b>	
Audio input	1-ch 3.5 mm audio interface, MIC IN/LINE IN
Audio output	1-ch 3.5 mm audio interface (line level, 600 Ω)
Communication interface	1 RJ45 10M / 100M ethernet port and 1 RS-485 interface
Alarm input	1
Alarm output	1
Video output	1 Vp-p composite output (75 Ω / BNC)
On-board storage	Built-in SD/SDHC slot, up to 32 GB
Reset button	Yes
<b>General</b>	
Operating conditions	-10°C ~ 60°C (14°F ~ 140°F) humidity 90% or less (non-condensing)
Power supply	12 VDC ± 10%, PoE (802.3af)
Power consumption	max. 6.5W (max. 9.5 W with IR cut filter on)
Dimensions	68 × 64.9 × 144.8 mm (2.67" × 2.56" × 5.70")
Weight	500g (1.10 lbs)

### Available models

DS-2CD855F-E

### Accessories



DS-1212ZJ (Indoor wall mount) DS-1213ZJ (Indoor/Outdoor Wall Mount) DS-1311/2/3HZ (Indoor/Outdoor camera housing) DS-1320HZ (Indoor camera housing) HW4510D-MPIR (Megapixel IR Varifocal lens)