



DS-2CD863P(N)F-E(W) 1.3 MP Network Camera

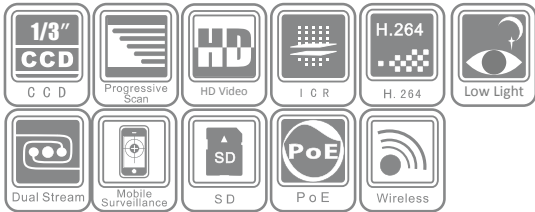

Key features

- Up to 1.3 megapixel resolution
- H.264 / MPEG4 / MJPEG video compression
- 1/3" Sony progressive scan CCD
- HD 720P real time video
- True day / night
- PoE

Dimensions

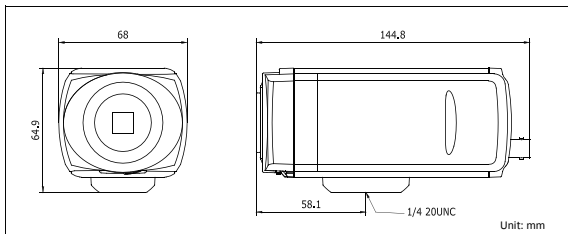

Accessories



DS-1212ZJ (Indoor wall mount) DS-1213ZJ (Indoor/Outdoor Wall Mount) DS-1311/2/3HZ (Indoor/Outdoor camera housing) DS-1320HZ (Indoor camera housing)

Specifications

DS-2CD863PF-E(W) / DS-2CD863NF-E(W)	
Camera	
Image sensor	1/3" Sony progressive scan CCD
Signal system	PAL / NTSC
Min. illumination	Color: 0.1 lux@F1.2, AGC on B/W: 0.01 lux@F1.2, AGC on
Shutter time	1/25 (1/30)s ~ 1/100,000s
Lens mount	C/CS mount
Auto iris	DC drive
Day & night	IR cut filter with auto switch
Compression standard	
Video compression	H.264 / MPEG4 / MJPEG
Bit rate	32 Kbps ~ 16 Mbps
Audio compression	G.711
Dual stream	Yes
Image	
Max. image resolution	1280 x 960
Frame rate	50 Hz: 12.5 fps (1280 × 960) 25 fps (1280 × 720) 60 Hz: 15 fps (1280 × 960) 30 fps (1280 × 720)
Image settings	Saturation, brightness, contrast adjustable through client software or web browser
Network	
Network storage	NAS (iSCSI optional)
Alarm trigger	Motion detection, network disconnect, IP address conflict, storage exception
Protocols	TCP/IP, HTTP, DHCP, DNS, DDNS, RTP/RTSP, PPPoE, SMTP, NTP (SNMP, HTTPS, SIP, FTP, SRTP, 802.1x, IPv6 optional)
Security	Password protection, watermark
System compatibility	ONVIF, PSIA, CGI
Interface	
Audio input	1-ch microphone input, 3.5 mm mini-jack
Audio output	1-ch 3.5 mm audio interface (line level, 600 Ω)
Communication interface	1 RJ45 10M / 100M ethernet port and 1 RS-485 interface
Alarm input	1
Alarm output	1
Video output	1 Vp-p composite output (75 Ω / BNC)
Local storage	Built-in SD/SDHC slot, up to 32 GB
Reset button	Yes
General	
Operating conditions	-10°C ~ 60°C (14°F ~ 140°F) Humidity 90% or less (non-condensing)
Power supply	12 VDC ± 10%, PoE (802.3af)
Power consumption	7.5W max. (12.5W max. with IR cut filter on) -W: 9W max. (14W max. with IR cut filter on)
Dimensions	68 × 64.9 × 144.8 mm (2.68" × 2.56" × 5.70")
Weight	500g (1.10 lbs)

Available models

DS-2CD863PF-E, DS-2CD863NF-E, DS-2CD863PF-EW, DS-2CD863NF-EW