


DS-2CE56D1T-(A)VPIR3

HD1080P Outdoor Vandal Proof IR Dome Camera


TURBO HD

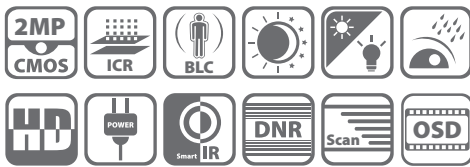

Key features

- HD1080P Video Output
- Adopt HDTVl Technology
- True Day/Night, Smart IR
- 2.8 - 12mm vari-focal lens
- Up to 40m IR distance
- IP66 weatherproof & Vandal Proof
- OSD menu controlled via UTC
- Dual voltage (DS-2CE56D1T-AVPIR3)

Dimensions

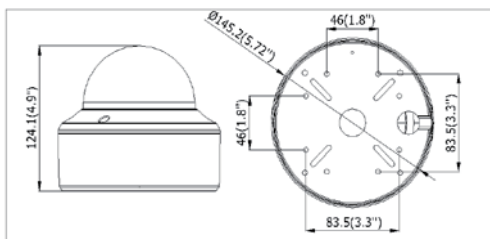

Accessories



Video balun
DS-1H18

Available models

- DS-2CE56D1T-AVPIR3
- DS-2CE56D1T-VPIR3

| DS-2CE56D1T-(A)VPIR3 | |
|--------------------------------|---|
| Camera | |
| Image Sensor | 2 MP CMOS Image Sensor |
| Signal System | PAL / NTSC |
| Effective Pixels | 1930(H)*1088(V) |
| Min. Illumination | 0.01 Lux @ (F1.2,AGC ON),0 Lux with IR 0.014 Lux @ (F1.4,AGC ON),0 Lux with IR |
| Shutter speed | 1/25(1/30) s to 1/50,000 s |
| Lens | 2.8-12mm @ F1.4 Angle of view: 105.2° - 32.8° |
| Lens Mount | φ14 |
| Angle Adjustment | Pan: 0 - 355°, Tilt: 0 - 90°, Rotation: 0-355° |
| Day & Night | ICR |
| Synchronization | Internal synchronization |
| Video Frame Rate | 1080p@25fps/1080p@30fps |
| HD Video Output | 1 Analog HD output |
| S / N Ratio | More than 52dB |
| Menu | |
| AGC | Support |
| D/N Mode | Color/ BW/ EXT |
| White Balance | Auto/ Manual |
| BLC | Support |
| Language | English/ Chinese |
| Function | Digital noise reduction, Mirror |
| General | |
| Working Temperature / Humidity | -40 °C – 60 °C (-40 °F – 140 °F) Humidity 90% or less (non-condensing) |
| Power Supply | 12 VDC ; -A: 12 VDC, 24 VAC |
| Power Consumption | Max. 4W |
| Weather Proof Ratings | IP66 |
| IR Range | Up to 40m |
| Impact Protection | IEC60068-2-75 test, Eh, 20J; EN50102, up to IK10. |
| Communication | Up the coax Protocol: HIKVISION-C(Coaxitron) |
| Dimensions | Φ 145.2 × 124.1 mm (Φ 5.72" × 4.9") |
| Weight | 880g (1.95 lbs) |