

## JetNet 6710G-M12 / 6710G-RJ

### Industrial 8 PoE + 2G Managed M12/RJ45 High Power IEEE802.3at PoE Switch



JetNet 6710G-M12

JetNet 6710G-RJ

CE FC RoHS



- 8 10/100 Base TX PoE ports and 2 Gigabit uplink ports
- Solid M12 D-coded (JetNet 6710G-M12) or Rugged RJ45 Ethernet connectors ( JetNet 6710G-RJ) to protect from vibration applications such as PoE in Tram, Rail or Highway
- 8 PoE ports support both 15.4W IEEE 802.3af and the latest 30W high power IEEE802.3at by LLDP PoE classification
- Total power budget is 200W by IEEE 802.3at with maximum 30W per port
- All ports support Korenix patented RSR with 5ms recovery time, and MSR for up to 4 x 100M Rings plus 1 Gigabit Ring
- IEEE 802.1AB LLDP and optional JetView Pro i<sup>2</sup>NMS software for auto-topology and group management
- Tag-VLAN for multiple VLAN traffic isolation
- LACP port trunk for bandwidth aggregation in video surveillance
- Auto thermal detection and power budget control
- Redundant DC Power Inputs and Relay Output
- AC 1.5KV Hi-Pot Isolation Protection for ports and power
- EN50155 compliance (applying)
- -40~60°C wide operating temperature (802.3af)

## Overview

Korenix JetNet 6710G, the revolutionary Gigabit Managed Industrial Power over Ethernet Switch, is designed exclusively for highly critical PoE applications such as real time IP video surveillance with high resolution quality and the evolving demands of wireless communications such as Wimax and 802.11 a/b/g/n Access Points. By software configuration or by LLDP auto detection, the eight 10/100 TX PoE injector ports can deliver 15.4W by IEEE 802.3af or 30W by the latest High Power PoE IEEE 802.3at standard.

The total power budget is up to 200W per unit to fulfill local increasing PoE demands. The two Gigabit Ethernet ports provide high speed uplink to connect with higher level backbone switches with Korenix MSR network redundancy technology. Korenix RSR™ can recover the network failure in less than 5 ms. To work under vibration and shock environments, the industrial D-code M12 connectors (JetNet 6710G-M12) or rugged RJ connectors (JetNet 6710G-RJ) provide exceptional solid Ethernet and PoE connections.

## Driving the High Power PoE market - Security, WiMAX


Since the ratification of the Power over Ethernet standard in 2003, the Power over Ethernet technology becomes a trend; more devices adopt PD technology to obtain power through Ethernet cable eliminating the need of running separate power wirings to a remote device. However, the frequently used IEEE 802.3af PoE standard with 15.4 w power budgets cannot satisfy the power needs of high end demanding applications, such as WiMAX, IP DOM Cameras, which require greater than the 15.4w power.

The JetNet 6710G series is equipped with the new PSE solution, compliant with both IEEE 802.3af 15.4w and IEEE 802.3at 30W high power PoE standards. It supports 8 PoE ports in End-span wiring architecture with up to 30w high powering capability per port and



200W per unit, to drive the motors of outdoor PTZ IP cameras with direction control for cross-street monitoring, or WiMAX systems for internet access in train stations, airports or Hot-spots.

## Efficient Powering Mechanism- IEEE 802.3at LLDP Power over Ethernet

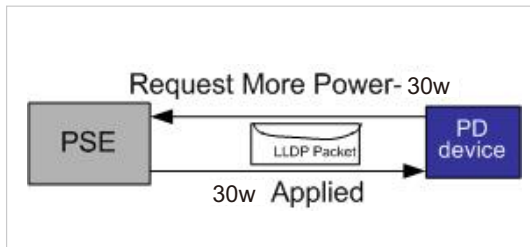

Some of legacy PD devices feature user defined manual mode and forced powering mode to support non-standard PD devices without PoE signature resistor for applying in WiMax systems.

For the new PoE+ (IEEE 802.3at) standard, in addition to the user manual and forced powering modes, JetNet 6710G implements the Link Layer Discovery Protocol (LLDP) into the system for efficient power budget negotiation between PD devices. The LLDP packet provides smart power budget control behavior to fulfill the needs of higher end setups requiring exact high power delivery.

## Power budget limitation with priority control

To power the High power PoE IEEE 802.3at, PSE device need to deliver 48V or higher voltage. However, in some environments it becomes hard to obtain enough power budget when the PSE is working with heavy loading in its high power mode. To solve this issue, the JetNet 6710G provides budget and priority control to ensure that the

total power consumption will not exceed the power limit installed by user. It also provides budget control function to limit the output power in case if the PD device is not claimed right consumption numbers. This feature allows user to protect high priority PD devices from shut down caused by overloading of the power supply.

## Solid RJ45/M12 Connectors against Vibration and Shock


In most occasions, PD devices installed in industrial environments are being subjected to vibration, shock, dust and other environmental threats. Korenix has designed JetNet 6710G series with RJ and M12 connectors resistant to vibration and shock in order to best fulfill the requirements of various applications. Equipped with 8 M12 D-coded connectors, JetNet 6710G-M12 series can be used for upgrading

industrial applications while delivering power along with data to PD devices in industrial machinery, factory automation, railways, marine applications etc. For outdoor networking applications, such as telecom, outdoor surveillance, wireless AP connections, JetNet 6710G-RJ PoE switches with 8 rugged RJ45 Ethernet connectors can be ideal solutions.

## Comprehensive Redundant Solutions – Multiple Super Ring (MSR™)


The JetNet 6710G supports new generation ring technology - MSR™ (Multiple Super Ring), which includes various new technologies for different network redundancy applications and structures. The JetNet 6710G allows aggregating up to 5 Rapid Super Rings, including 4 Fast Ethernet plus 1 Gigabit Ethernet Rings. With the MSR™ technology, a node can be configured to multiple rings with the failover time in as little as 5ms and zero-second of restoration time. In addition, users can extend the ring topology by adding hundreds of JetNet series to meet the large-scale network needs

without compromising the network speed. The MSRTM also allows the JetNet series to easily connect with core management switches via standard Rapid Spanning Tree Protocol or through multiple paths or nodes to increase the reliability by RDH™ (Rapid Dual Homing )(RDH™ ) technology. By integrating MSR™ and Link Aggregation Control Protocol (LACP) the JetNet series can enhance the link availability and increase the overall link capacity. Two or more Fast Ethernet connections are combined in order to increase the bandwidth and to create a resilient and redundant link.

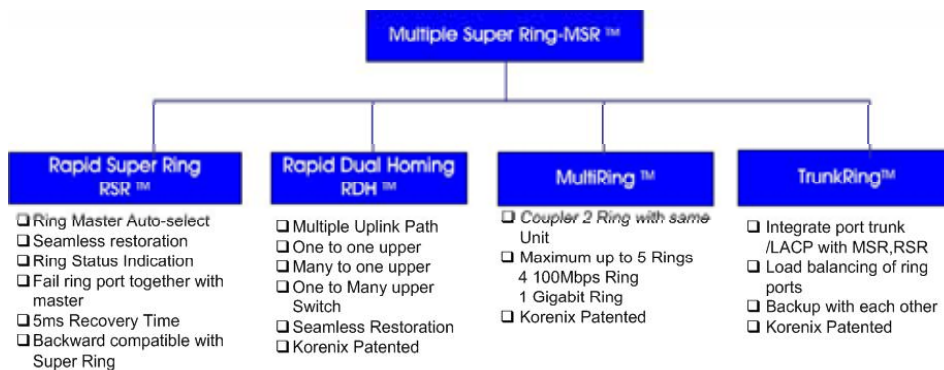

## Rapid Super Ring (RSR™) Technology

Rapid Super Ring is the 2nd generation of Korenix Ring Redundancy technology. The recovery time is greatly improved from 30ms to few ms for both copper and fiber ring. The Ring master can be auto-selected by RSR engine. The 1st ring port of the R.M. is the primary path while the 2nd ring port of the R.M. is the block path. Once the primary path fails, the 2nd path will be recovered within few ms. Besides, the restoration time is also shortened to zero in the R.M. auto-selection mode.

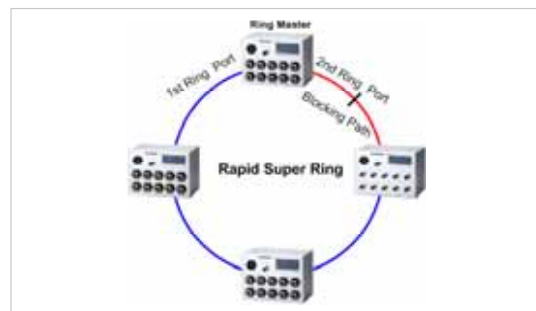

## Seamless Ring Port Restoration™


Seamless restoration is a new Korenix patented technology which can restore a failed ring without causing any loop problem, topology change and packet

loss. With a 0 second restoration time, this mechanism eliminates any unstable status and guarantees the applications running non-stop.

## Rapid Dual Homing (RDH™) Technology


Rapid Dual Homing is also an important feature of Korenix new generation Ring technology. It supports ring coupling with other vendors devices. Moreover, providing easy configuration and multiple redundancies, the failover time is much faster and the restoration time is zero ms. Uplinks can be auto detected and gathered into groups. In each group uplinks are sorted into primary,

secondary and standbys based on their link speed. The uplink with the highest speed is more likely to be active path for data transmission. Link aggregation is also integrated into RDH™. An uplink connection can be a single link or several links aggregated as a trunk, which provides better redundancy and link capacity.

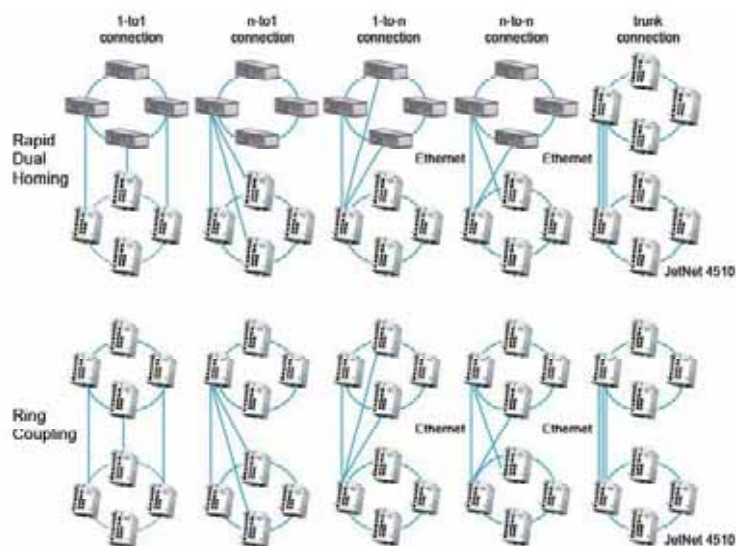

## TrunkRing™


TrunkRing is a new feature in MSR which merges the two technologies of RSR and link aggregation. It takes advantages of aggregation to enhance the link redundancy, while increasing the link speed. The ring will open only if all the aggregated links are broken. Link aggregation can be achieved by either static trunk or LACP. Not all the link sections in a TrunkRing need to be the same. Ring links can be either symmetric or asymmetric. Some are a single path, and the others are aggregated by links where the number of links in a trunk group can be different. Users can enhance the link

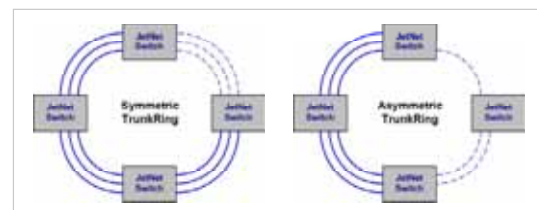

redundancy at different locations in accordance to the need. The link with less speed is more likely to be used as the backup path for restoring the network to full play capacity.

## Link Aggregation Control Protocol



Link Aggregation Control Protocol allows users grouping multiple Ethernet ports in parallel to increase the link bandwidth. The aggregated ports can be viewed as one physical port, so that the bandwidth is higher than just one single Ethernet port. The member ports of the same trunk group can balance the loading and backup with each other. The LACP feature is usually used when higher bandwidth is needed for the backbone network. This is a cost-effective way for transferring much more data.

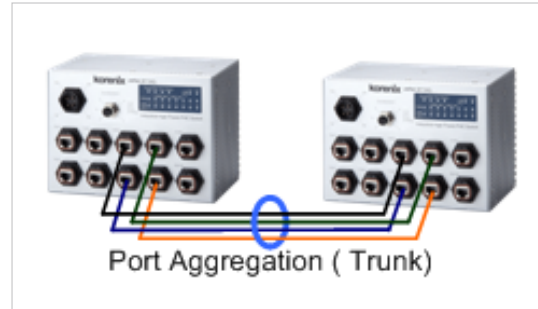

## Auto Topology Discovery & Efficient Management through LLDP and JetView Pro i<sup>2</sup>NMS

JetNet 6710G supports topology discovery or LLDP (IEEE 802.1AB Link Layer Discovery Protocol) function that can help users to discover multi-vendor's network devices on the same segment by an NMS system, which support LLDP function. With LLDP function, NMS can easily maintain the topology map, display port ID, port description, system description, VLAN ID, etc.. Once a link failure happens, the topology changed events are updated to the NMS to help users easily maintain the network system. Besides the SNMP and LLDP protocols, JetNet 6710G series efficiently works with the Korenix

patented JetView Pro i2NMS, which in addition to the auto-topology discovery, also delivers MSRTM group management, group IP assignment, firmware upgrade, configuration file backup/ restore ,SNMP MIB Browser / compile, etc. Furthermore, users can export the topology map to diverse formats, such as JPG, BMP, PNG and PDF, for easily managing and trouble-shooting the network. The user-friendly software allows administrators to discover devices automatically and efficiently manage the performance of the industrial network.

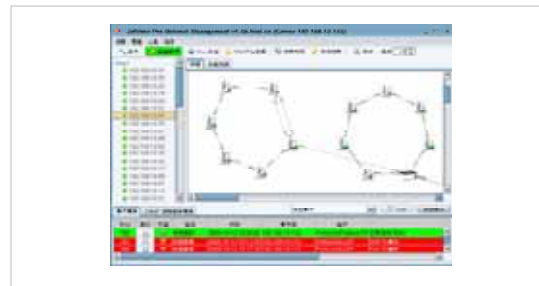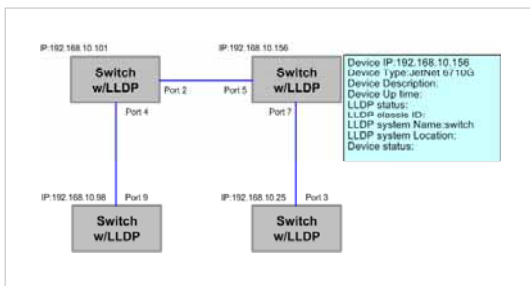


## Outstanding Management and Enhanced Security

The JetNet 6710G provides various network control and security features to ensure the reliable and secure network connection. To optimize the industrial network environment, JetNet 6710G series supports advanced network features, such as Tag and Port-based VLAN, IGMP Snooping, Quality of Service (QoS), Link

Aggregation Control Protocol (LACP), Rate Control, etc. To avoid hacker's attacks and ensure the secure data transmission, JetNet 6710G series features DHCP client, DHCP server with IP and MAC binding, 802.1X Access Control, SSH for Telnet security, IP Access table, port security and many other security features.

## Dimensions

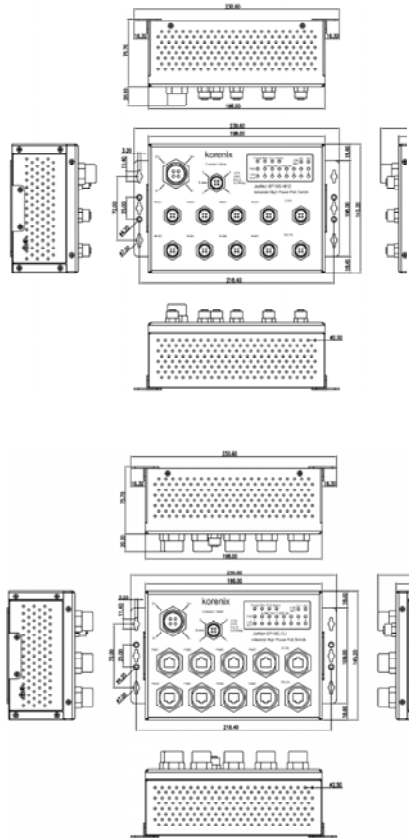

## Specification

### Technology

#### Standard:

- IEEE 802.3 10 Base-T Ethernet
- IEEE 802.3u 100 Base-TX Fast Ethernet
- IEEE 802.3ab 1000 Base-TX
- IEEE 802.3x Flow Control and Back-pressure
- IEEE 802.3af Power over Ethernet
- IEEE 802.3at High Power over Ethernet
- IEEE 802.1AB Link Layer Discovery Protocol (LLDP)
- IEEE 802.1p Class of Service (CoS)
- IEEE 802.1Q VLAN and GVRP
- IEEE 802.1D-2004 Rapid Spanning Tree Protocol (RSTP)
- IEEE 802.1s Multiple Spanning Tree Protocol (MSTP)
- IEEE802.3ad Link Aggregation Protocol (LACP)
- IEEE802.1x Port Based Network Access Protocol

### System Performance

**Switch Technology:** Store and Forward Technology with 32Gbps Switch Fabric

**System Throughput:** 14,880pps for 10M Ethernet, 148,800pps for 100M Fast Ethernet, 1,488,100 for Gigabit Ethernet

**CPU performance:** 32 bits ARM-9E running at 180 Mhz and performance up to 200MIPS; Embedded hardware based watch-dog timer.

**System Memory:** 8M bytes flash ROM, 64M bytes SDRAM. Transfer packet size 64 bytes to 1632 bytes (includes 1522 bytes VLAN Tag).

**MAC Address:** 8K MAC address table.

**Packet Buffer:** 1M bits shared memory for packet buffer.

**Transfer performance:** 14,880pps for Ethernet and 148,800 for Fast Ethernet, 1488,100 for Gigabit Ethernet

**Environment Monitoring:** Embedded board-level thermal detector for system temperature monitoring.

**Relay Alarm:** Dry Relay output with 2A /30V DC or 0.5A/125V AC ability



## System Management

**Configuration and monitoring interface:** Tenet, local RS-232 console, Web- browser interface, SNMP, Trap and SMTP interface.

Cisco-Like CLI, Telnet, Web, TFTP/Web Update for firmware and configuration backup and restore, DHCP Client, warm reboot, reset to default, Admin password, Port Speed/Duplex Control, status, statistic, MAC address table display, static MAC, Aging time, SNMP v1, v2c, v3, Traps and RMON groups 1,2,3,9.

**Telnet & Local Console:** Supports command line interface with Cisco like commands and maximum 4 sessions; the telnet interface also supports SSH.

**SNMP:** v1, v2c, V3 with SNMP trap function, trap station up to 4 and can be manually configured the trap server IP address.

**SNMP MIB:** MIBII, Bridge MIB, Ethernet-like MIB, VLAN MIB, IGMP MIB, Korenix Private MIB.

**Korenix Utility:** Supports JetView and JetView Pro with IEEE 802.1AB Link Layer Discovery Protocol for device finding and link topology discovery

**Network Time Protocol:** Supports NTP protocol with daylight saving function and localize time sync function.

**Management IP Security:** IP address security to prevent unauthorized access

**E-mail Warning:** 4 receipt E-mail accounts with mail server authentication

**System Log:** Supports both of Local or remote Server with authentication

## Network Performance

**Port Configuration:** Port link Speed, Link mode, current status and enable/disable.

**Port Trunk:** IEEE 802.3ad port aggregation and static port trunk; trunk member up to 8 ports and maximum 5 trunk groups include Gigabit Ethernet port.

**VLAN:** IEEE 802.1Q VLAN with GVRP. 64 VLAN groups, VLAN ID from 1 to 4094.

Supports Trunk, Hybrid and Link access modes.

**Class of Service:** IEEE 802.1p class of service; per port 4 priority queues.

**Traffic Prioritize:** Supports 4 physical queues, weighted fair queuing (WRR) and Strict Priority scheme, which follows 802.1p COS tag and IPv4 ToS/ Diffserv information to prioritize the traffic of your industrial network.

**IGMP Snooping:** IGMP Snooping v1/v2c /v3 for multicast filtering and IGMP Query mode; also support unknown multicasting process forwarding policies- drop, flooding and forward to router port.

**Rate Control:** Ingress/Egress filtering for Broadcast, Multicast, Unknown DA or All packets.

**Port Mirroring:** Online traffic monitoring on multiple selected ports

**Port Security:** Port security to assign authorized MAC to specific port

**DHCP:** DHCP Client, DHCP Server with IP & MAC Address binding and DHCP agent (option 82).

**IEEE 802.1x:** Port based network access control.

**Power over Ethernet:** IEEE 802.3af / IEEE 802.3at; End-span wiring architecture

**PoE Operating Mode:** Auto mode:Auto detects and powering by IEEE 802.3af behaviors and IEEE 802.3at

LLDP protocol for high power.

Forced mode: User configured power consumption without detection, classification

**PoE forwarding conductor:**

JetNet 6710G-RJ

RJ-45: V+ (1,2), V- (3,6)

JetNet 6710G-M12

M12 D-code: V+ (1,2), V- (3,4)

**Power forwarding ability:** IEEE 802.3af: 15.4w

IEEE 802.3at: 30w

**Power Budget Control:** Port Based budget control with priority control, system will auto calculate total power and shut down low priority port when drawing current is over the power supply

## Network Redundancy

**Multiple Super Ring (MSR)<sup>TM</sup>:** New generation Korenix Ring Redundancy Technology, Includes Rapid Super Ring, Rapid Dual Homing, TrunkRing<sup>TM</sup>, MultiRing<sup>TM</sup> and backward compatible with legacy Super Ring<sup>TM</sup>.

**Rapid Dual Homing (RDH)<sup>TM</sup>:** Multiple uplink paths to one or multiple upper switch

**TrunkRing<sup>TM</sup>:** Integrate port aggregate function in ring path to get higher throughput ring architecture

**MultiRing<sup>TM</sup>:** Couple or multiple up to 16 Rapid Super Rings, JetNet 6710G supports up to 4 100M rings and 1 Gigabit ring in single switch.

**Rapid Spanning Tree:** IEEE802.1D-2004 Rapid Spanning Tree Protocol. Compatible with Legacy Spanning Tree and IEEE 802.1w.

## Interface

**Enclosure Port: 10/100 TX port**

JetNet 6710G-RJ: 8 x rugged RJ-45

JetNet 6710G-M12: 8 x M12-D-Code 4-pin Female

**10/100/1000 TX port**

JetNet 6710G-RJ: 2 x rugged IP-67 RJ-45

JetNet 6710G-M12: 2 x M12-A-Code 8-pin Female

**Console port & Alarm Relay Output**

M12 A-code Male for RS-232 and relay alarm output.

**Power port:** CTG-4F 4-pin Rugged IP-67 Connector

**Cables:**

10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable, EIA/TIA-568B 100-ohm (100m)

100 Base-TX: 2-pair UTP/STP Cat. 5 cable, EIA/TIA-568B 100-ohm (100m)

1000 Base-TX: 4-pair UTP/STP Cat. 5 cable, EIA/TIA-568B 100-ohm (100m)

**RS-232 & Alarm Output:** RS232: M12 A-code female 5-pin connector, TxD (Pin 1), RxD(Pin 2), Signal Ground (Pin 5)

Alarm Output :M12 A-code female 5-pin connector 3, 4

**LED Indicators:** 10/100 RJ-45: Link /Activity(Green), Full duplex/Collision (Yellow)

Gigabit Copper: Link/Activity(Green)

PoE port: IEEE 802.3af 15.4w

(Green on: Power forwarding; Blinking: PoE Abnormal )

IEEE 802.3at High Power High Power

(Blue on: Power forwarding; Blinking: PoE Abnormal)

Power: System Power ready (Green on)

Sys: System Ready (Green On)

Alm: Alarm Relay Active (Red On)

R.M.: Ring Master (Green on),



Ring Failure occurred (Yellow on)

Sys: System Ready (Green on: system ready)

**Power input interface:**

Redundant power input

**Digital Alarm Output:** Dry Alarm Relay output integrated within RS-232 (pin 3 & 4)

Alarm Relay activate once pre-configured event occurred.

**Power Requirements**

**System Power:** JetNet 6710G-M12/JetNet 6710G-RJ

Input Voltage: DC 48~57V, redundant input with reverse protection

**Mechanical**

**Installation:** DIN-Rail mount or Wall Mount

**Case:** Steel metal and aluminum case.

**Dimension (mm):**

JetNet 6710G-M12/ 6710G-RJ : 198 (W) x 145.2 (H) x 74 (D) w/o mounting kit

JetNet 6710G-M12/ 6710G-RJ : 230.6 (W) x 145.2 (H) x 74 (D) w/mounting kit

**Environmental**

**Operating Temperature:**

-40 ~60°C: 15.4w x 8 ports

-40 ~60°C: 30w x 8 ports

**Operating Humidity:** 0% ~ 90%, non-condensing

**Storage Temperature:** -40 ~ 85°C

**Hi-Pot:** AC 1.5KV for all ports and power

**Regulatory Approvals**

EMI :

FCC Class A, CE/ EN55011, CISPR-11

Radiation, Conduction

EMS :

EN61000-4-2, EN61000-4-3, EN61000-4-4,

EN61000-4-5, EN61000-4-6, EN61000-4-8,

EN61000-4-11.

Compliance with the EMC of EN50155

Railway applications -Electronic equipment used on rolling stock – EN 50121-3-2 /EN50121-4

**Vibration & Shock:** Compliance with IEC 61373 for Railway and Rolling stock.

**Warranty:** Global 5 years

## Ordering Information

**JetNet 6710G-M12 Industrial 8 PoE + 2G Managed M12 High Power IEEE802.3at PoE Switch**

Includes:

- JetNet 6710G-M12
- M-12 D-code to RJ-45 Ethernet Cable x1
- M-12 A-code 5-pin to DB-9 console cable x1
- M12 D-code 4-pole Field Assemble able Connector x 8
- M12 A-code 8-pole Field Assemble able Connector x2
- Field Assemble able power connector x1
- Cap of M12 connector (tighten on the switch) x 11
- Wall /Panel Mounting kits with screw x 1 set
- Quick Installation Guide x1
- CD user manual x 1

**JetNet 6710G-RJ Industrial 8 PoE + 2G Managed RJ45 High Power IEEE802.3at PoE Switch**

Includes:

- JetNet 6710G-RJ
- M-12 A-code 5-pin to DB-9 console cable x1
- Cap of M12 connector (tighten on the switch) x1
- Rugged RJ45 Field Assemble able Connector x10
- Cap of rugged RJ-45 connector (tighten on the switch ) x 10
- Field Assemble able power connector x1
- Wall /Panel Mounting kits with screw x 1 set
- Quick Installation Guide x1
- CD user manual x 1