



6708 Series Hybrid NVR


MARCH

8-Channel Recording Platform



The **8-channel Hybrid NVR** from March Networks[®] delivers video that's always there when you need it, and the advanced tools that allow you to quickly find the evidence you need. Get your job done faster — from installation to investigation — with this appliance-based hybrid NVR as the backbone.

This recorder is ideal for customers seeking a highperformance video surveillance platform that supports up to eight cameras, offers intuitive software for identifying fraud and monitoring operations, and makes it easier and more cost-effective to transition to high-definition (HD) IP video. The enclosure is designed with smaller footprint stores and standalone kiosks in mind, but still with the redundancy of a two-drive system.



Key Benefits

- Meets privacy guidelines. Privacy protection features, such as privacy masking, operator access restrictions, and the ability to delete archived video clips, complies with video surveillance guidelines across Europe and the Middle East.
- Embedded, Linux-based, and purpose-built. Spend more time performing investigations and less time dealing with maintenance issues that can plague a PC-based recorder.
- All camera licenses included. No need to pay for separate channel licenses; benefit from a full-featured recording platform right out of the box.
- Configurable recording policies. Record video based on user-definable variables like schedule, motion, analytics, etc.
- Real-time health monitoring. Be alerted to camera, recorder and network issues within seconds.
- Network policies for bandwidth protection. Maximize overall system performance with features like bandwidth throttling, maximum retention settings, multi-sector archiving, and selective video recording.
- Front panel QR code. Use March Networks' free GURU Smartphone App to scan the recorder's QR code to check warranty status, get in-field diagnostics support, do on-site wireless provisioning, or even initiate an express RMA.
- ▼ Powerful video management software. With March Networks Command[™] Recording Software and Command Enterprise Software, you'll be equipped with the features and tools you need to easily manage your video surveillance system, including innovative search tools, mass management, Windows[®] Active Directory integration, and health monitoring.

The recorder's small, tamper-proof enclosure is ideal for standalone kiosks or any location with space constraints, in a platform that complies with your region's privacy guidelines.



6708 Series 8-Channel Hybrid NVR

MODELS

6708 S series	8 channels, 8 analog inputs, 25fps (PAL) / 30fps (NTSC) throughput, desk mount
VIDEO	
Analog Capacity	25fps (PAL) / 30fps (NTSC) concurrent at full 4CIF/D1 across 8 channels; 200fps (PAL) / 240fps (NTSC)
Video Compression	H.264, M-JPEG, CIF/2CIF/4CIF resolution
Analog Camera Inputs	8 maximum
IP Camera Inputs	8 maximum
IP Camera Performance	With all analog cameras enabled, IP cameras are not available With all analog cameras disabled, IP camera capacity = 24 Mbps (3 Mbps / camera)
Video Output	Composite or HDMI
AUDIO	
Analog Audio Inputs	2, unbalanced, 10k Ω , 1Vp-p typical
Analog Audio Outputs	1, unbalanced, 600Ω, 1Vp-p
Analog Audio Codec	G.711, 8 bit/8kHz, 64 kBit/s, unidirectional
NETWORK	
Local Network	10/100/1000Base-T Ethernet (RJ-45)
Camera Network	10/100/1000Base-T Ethernet (RJ-45)
Security	Industry standard TLS 1.2 with strong AES encryption, HTTPS encryption, strong hashing algorithms SHA256, continuous security vulnerability assessment
SYSTEMS / NETWOR	KMANAGEMENT

Bandwidth Throttle Yes (can include exceptions on a per-IP address basis) **Bandwidth Scheduling** Yes Adaptive Bandwidth Yes **Remote Connection** TCP/IP (IPv4) **Concurrent Remote** No set limit Connections **Internal Battery** Enables systematic shutdown; no external UPS communication required **ANALYTICS** Included Motion detection Optional Camera obstruction, field-of-view monitoring, trip wire, loitering, presence detection **STORAGE**


STORAGE	
Internal Hard Drives	up to two 3.5" HDDs
Individual Drive Capacity	3 TB or 4 TB
Total Storage Capacity	Up to 8 TB
Drive Type	Serial ATA (SATA)

ALARM INPUTS/OUTPUTS

Alarm Inputs	2 current loop inputs, supporting open and closed detection
Relay Outputs	1 relay switch output (30VDC, 1A); programmable event driven
PHYSICAL	
Dimensions (HxWxD)	9.18 x 28.7 x 30.6 cm (3.6 x 11.3 x 12.0 in)
Mounting	Wall mount and desktop
Security	Tamperproof enclosure
Weight	3.3 Kg (7.3 lbs) Add 0.7 Kg (1.5 lbs) per HDD
ENVIRONMENTAL	
Operating Temperature	5°C to 40°C (41°F to 105°F)
Heat Dissipation	Maximum 255 BTU per hour (system plus 2 hard drives)
Humidity	5% to 95% RH (non-condensing)
Storage Conditions	-40°C to 70°C (-40°F to 158°F)
ELECTRICAL	
Internal Power Supply	110/220 VAC (auto-sensing), 1.7A, 50-60Hz
Power Consumption	20W typical, 60W max
REGULATORY	
Safety	IEC60950-1 (ed.2), UL 60950-1 (ed.2), CSA C22.2 No. 60950-1-07 (ed.2)
ЕМС	FCC 47 CFR Part 15, Subpart 15, ICES-003, EN55022, CISPR 22, AS/NZS CISPR 22, EN61000-3-2, EN 61000-3-3, EN50130-4, EN55024
Compliance Marking	CE-mark, cULus, C-tick, WEEE

ORDERING INFORMATION

RECORDERS		
30264-103	6708 S NVR, 1x3 TB	
30264-104	6708 S NVR, 2x3 TB	
30264-105	6708 S NVR, 1x4 TB	
30264-106	6708 S NVR, 2x4 TB	
ACCESSORIES		
28934	Wall mount kit	
29029	Tamperproof enclosure	

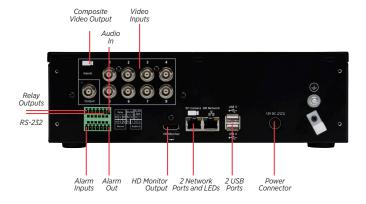

2-year Advance Replacement plan on all NVRs:

- Options for Repair & Return or Advance Replacement
- March Networks incurs all shipping costs—both ways—for AR's
- All NVR components are covered, including HDDs

North America	
Latin America	
Europe+39 0362 17935	
Asia+65 6818 0963	
Australia and New Zealand+61 1300 089 419 Middle East and Africa+971 4 399 5525	

.....

© 2018 March Networks. All rights reserved. Information in this document is subject to change without notice. MARCH NETWORKS, March Networks Command, March Networks Searchlight, March Networks RideSafe, and the MARCH NETWORKS logo are trademarks of March Networks Corporation. All other trademarks are the property of their respective owners. 060-3196-00-E marchnetworks.com

