




9132 IP Recorder

High-capacity, high-definition IP recording platform with RAID option





For customers who are planning an all-IP installation, and require a powerful recorder with high throughput, the **9132 IP Recorder** from March Networks^{*} accommodates up to 32 IP cameras and provides a total bandwidth capacity of 200 Mbps. The 9132 recorder delivers highdefinition video that's always there when you need it, and the advanced tools that allow you to quickly find the evidence you need. Our solutions help you get your job done faster — from installation to investigation — with these appliance-based recorders as the backbone.



Key Benefits

- More bandwidth per IP channel. The recorder accommodates a total recording rate of up to 200 Mbps, with no set limit per camera channel.
- **High capacity storage.** Store HD video for several weeks, or even months.
- All camera licenses included. No need to pay for separate channel licenses; benefit from a full-featured recording platform right out of the box.
- ▼ March Networks Command[™] Recording Software. Get the powerful VMS tools you need to easily manage your surveillance system.
- Configurable recording policies. Record video based on user-definable variables like schedule, motion, analytics, etc.
- Embedded, Linux-based, and purpose-built. Customers can spend more time performing investigations and less time dealing with maintenance issues that can plague a PC-based recorder.
- Optional RAID control. RAID5 offers the best overall balance of data protection and performance, and makes the most efficient use of drive capacity.
- Redundant power supply. Hot-swap redundant power supplies ensure maximum reliability.
- Front panel LEDs for easy diagnostics. Dedicated LEDs indicate the status of each individual hard drive, and diagnostic LEDs convey information about the recorder in general, as well as operational, recording, and export status.
- Real-time health monitoring. Be alerted to camera, recorder and network issues within seconds.
- Easy access to hard drives by authorized personnel. All HDDs are accessible via the front panel for hassle-free replacement. Each drive is equipped with its own locking mechanism to prevent unauthorized access.
- QR Code. Use March Networks' free GURU Smartphone App to scan the recorder's front panel QR code for instant product information, like serial number, warranty information, etc.

Secure your facility with up to 32 HD IP cameras and recognize the power of the recorder's high-bandwidth performance.



9132 IP Recorder

VIDEO

Video Support	H.264, H.264+, MPEG4, MPEG, MJPEG
Max IP Camera Inputs	32 (dual stream support)
Camera Licensing	32 channel licenses included out-of-box
IP Camera Performance*	200 Mbps (Avg 6.25 Mbps / camera)
Video Output	HDMI
Analog Support	Via encoder
AUDIO	
Audio Support	Facilitated via audio-enabled cameras
NETWORK	
Network 1	GigE port for connection to corporate network
Network 2	GigE port for connection to camera network
Security	Industry standard TLS 1.2 with strong AES encryption, HTTPS encryption, strong hashing algorithms SHA256, continuous security vulnerability assessment
Interface	10/100/1000Base-T Ethernet (2 x RJ-45)

On a per-recorder basis, control which clients receive full bandwidth and which get controlled bandwidth

Dimensions (H x W x D)	1.75 x 18.9 x 21.0 in (4.5 x 48.0 x 53.3 cm)
Mounting	1U high, 19", 4 post server rack mount. Recorder ships with rails.
Weight Recorder Hard Drive	19.43 lbs (8.81 Kg) Add 1.7 lbs (0.8 kg) per HDD
ENVIRONMENTAL	
Operating Temperature	32° to 104°F (0° to 40°C)
Heat Dissipation	Maximum 188 BTU per hour (system plus 4 hard drives)
Humidity	5% to 95% RH (non-condensing)
Storage Conditions	-40°F to 158°F (-40°C to 70°C)
ELECTRICAL	
Internal Power Supply	Dual redundant hot swap with RAID5; 115/230 VAC (auto-sensing), 2.3A, 50-60Hz
Power Consumption	55W typical; 120W max
Systematic Shutdown	Via internal battery; no external UPS communication required
REGULATORY	
Safety	IEC60950-1 (ed.2), UL 60950-1 (ed.2), CSA C22.2 No. 60950-1-07 (ed.2)
EMC	FCC 47 CFR Part 15, Subpart 15, ICES-003, EN55032, CISPR32 and AS/NZS CISPR32, EN61000-3-2, EN 61000- 3-3, EN50130-4,EN55024
Compliance Marking	CE-mark, cULus, RCM, WEEE
Environmental Compliance	ROHS and WEEE
ORDERING INFORMA	ΓΙΟΝ
RECORDERS	
34531-101	9132 Recorder, 1 x 8 TB
34531-102	9132 Recorder, 2 x 8 TB
34531-103	9132 Recorder, 3 x 8 TB
34531-104	9132 Recorder, 4 x 8 TB
34531-112	9132 Recorder, 4 x 10 TB
34531-120	9132 Recorder, 4 x 12 TB

9132 Recorder with RAID5, 4 x 10 TB (30 TB usable)

9132 Recorder with RAID5, 4 x 12 TB (36 TB usable)

Command I/O Board for Alarms

Individual Up to 12 TB

SYSTEMS / NETWORK MANAGEMENT

Linux

Yes TCP/IP (IPv4)

No set limit

Operating System

Bandwidth Throttle

Remote Connection Concurrent Remote

Connections **ANALYTICS Analytics Support**

STORAGE Internal Hard Dives


Bandwidth Scheduling

Drive Capacity	00001210
Total Storage Capacity	Up to 40 TB (36 TB usable) with RAID Up to 48 TB without RAID
Drive Type	Serial ATA (SATA)
Storage Redundancy	With RAID: RAID5 (reduces throughput during rebuild) Without RAID: Mirroring (reduces throughput)

Up to four 3.5" HDDs

Facilitated via analytics-enabled cameras

* IP camera performance for 4-drive configuration (RAID units) = 360 Mbps

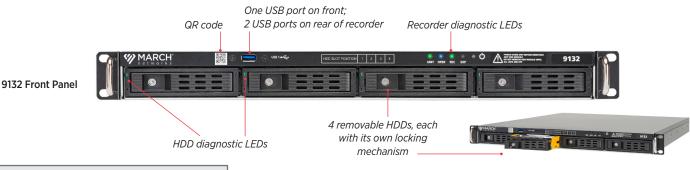

36144-112

36144-120

ACCESSORIES

VMS-ALM-IO-16

PHYSICAL

3-year warranty on all recorders:

- · Options for Repair & Return or Advance Replacement
- · March Networks incurs all shipping costs—both ways—for AR's
- All recorder components are covered, including HDDs

4
11
5
3
9
5

© 2019 March Networks. All rights reserved. Information in this document is subject to change without notice. MARCH NETWORKS, March Networks Command, March Networks Searchlight, March Networks RideSafe, and the MARCH NETWORKS logo are trademarks of March Networks Corporation. All other trademarks are the property of their respective owners. 060-3307-00-E marchnetworks.com

