

Halocam IPM

IP67-Rated 360° Minidome IP Camera



ONCAM
GRANDEYE

A 360° minidome IP camera with a 5-megapixel sensor and no moving parts

- Constant 360° surveillance; no blind spots
- Silent operation as there are no mechanical parts
- No moving parts means no regular maintenance due to wear and tear
- Vandal-resistant enclosure (IP67-rated)

Ideal when IP67 standard ingress protection is required

- Fully supports IEEE802.3af Class 2 Power over Ethernet (PoE)
- Easy installation
- Pleasing aesthetics
- Minimum illumination 0.5 lux, providing the most clarity in low light among peers
- Convenient surface-mounting enclosure
- Suitable for ceiling, wall or table mounted applications


Dewarped PTZ virtual cameras (VCams)

- Uses powerful, patented on-camera image processing
- Independent pan, tilt and zoom (PTZ) operation with each VCam, as well as panorama and fisheye images; as well as panorama and fisheye images available in the Pro-Series
- Motion detection within polygonal-defined areas of interest
- Up to four targets or events tracked simultaneously on one camera
- Polygonal, configurable privacy regions
- 10x digital zoom
- Retrospective scene analysis with vPTZ when used with a compatible recorder



Multiple video streams with choice of resolutions

- Optimizes bandwidth and storage utilisation
- Multiview video streams
- Video streams in multiple resolutions from QQVGA (160x120) to 2144x1944
- 4fps typical and up to 10fps for virtual cameras
- MJPEG stream with multiple quality levels
- Multilevel password protection
- Intuitive web-based interface for viewing and configuration
- Highly configurable Event Management with notifications via Email, FTP and external output
- Integrates NVRs directly to the camera by utilising Oncam Grandeye's separately provided SDK
- Supports major VMS systems

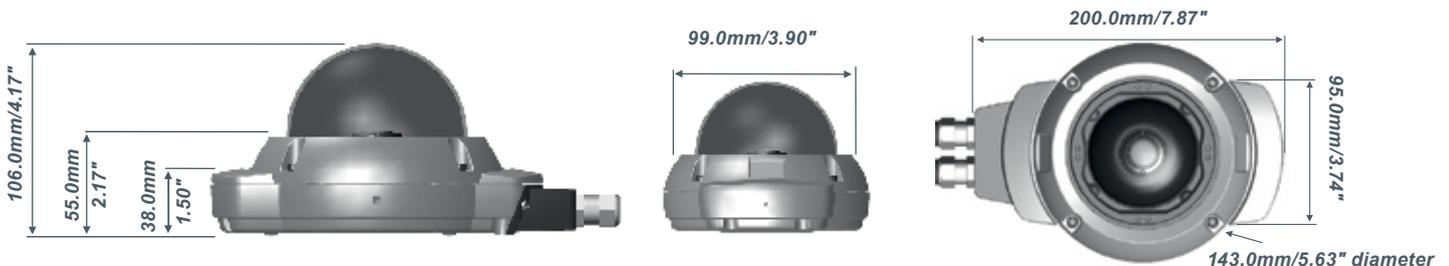

Oncam Grandeye | 115 Hammersmith Road, London W14 0QH, UK | www.oncamgrandeye.com | t: +44 (0) 207 371 6640 | e: sales@oncamgrandeye.com

Copyright 2012 by Oncam Global Group AG. Oncam Grandeye is the trading name of Oncam Global Group AG. All rights reserved. All screen images are simulated. Specifications and configurations subject to change without notice. IPZoom and the IPZoom logo are trademarks of Oncam Global Group AG (and its affiliates). SATIV is a service mark of Oncam Global Group AG (and its affiliates). The names of companies, entities, organizations and/or products/services mentioned herein may be the trademarks of their respective owners.

Halocam IPM

IP67-Rated 360° Minidome IP Camera



ONCAM
GRANDEYE

HALOCAM IPM TECHNICAL SPECIFICATIONS			
Model	GE-IP-004	GE-IPP-004	GE-IPS-004
General			
Field of view	360°		
Image sensor	5 megapixel		
Angle of view	180° hemisphere		
Minimum illumination	0.5 lux		
Frame rate	4 fps typical and up to 10fps for virtual cameras		
Zoom	10x digital		
Video analytics	10 polygonal regions of interest; motion detection	10 polygonal regions of interest; motion detect; motion track; configurable response; multitarget simultaneous tracking; adjustable tracking characteristics	10 polygonal regions of interest; motion detect; motion track; configurable response; multitarget simultaneous tracking; adjustable tracking characteristics
vPTZ	Immediate response		
Presets	10 preset views		
Image pipeline	12-bit		
External input	N/A	1 contact input	1 contact input
External output	N/A	1 momentary or transparent	1 momentary or transparent
Security	Multilevel access with configurable passwords		
Users	20 simultaneous users		
Event management	Triggered by motion	Triggered by motion, external input or HTTP event. Result configurable; PTZ tracking; external output; FTP/SMTP upload	Triggered by motion, external input or HTTP event. Result configurable; PTZ tracking; external output; FTP/SMTP upload
Networking	HTTP, DHCP, DNS, NTP	HTTP, FTP, SMTP, DHCP, DNS, NTP	HTTP, FTP, SMTP, DHCP, DNS, NTP
Privacy	N/A	10 polygonal, configurable privacy regions	10 polygonal, configurable privacy regions
Electrical			
Ports	RJ45 for 100Base-TX; 2.1mm DC Input jack; 3-pin 1.5mm Phoenix for external I/O		
Network cable type	CAT5 or better for 100Base-TX		
Power input	PoE or 5V DC rated @ at least 1A		
Power consumption	5W typical		
Mechanical			
Camera mount	4 x M4.5 (No8) screw, supplied, to secure base of camera to surface		
Weight	1.2kg (2.64lbs)		
Enclosure	All-aluminum dome enclosure with polycarbonate dome cover		
MTBF	Predicted mean time between failure: 103,906 hours		
Environmental			
Operating temperature range	-40 to +70°C (-40 to 158°F) in accordance with 1 85 EN 50155"		
Storage temperature range	-40 to +70°C (-40 to +158°F)		
Ingress protection rating	IP67		
Video			
Video codec	Motion JPEG		Motion JPEG
Compression level	95 levels of compression adjustment		
Video stream resolution	Virtual cameras at: VGA; XGA Panoramas at: 640x208; 1024 x 336 Fisheyes at: VGA; QVGA; 1024x1024; 1424x1424; 2144x1944	Virtual cameras at: QQVGA; QVGA; VGA; XGA Panoramas at: 640x208; 1024 x 336 Fisheyes at: VGA; QVGA; 1024x1024; 1424x1424; 2144x1944	Virtual cameras at: QQVGA; QVGA; VGA; XGA Panoramas at: 640x208; 1024 x 336 Fisheyes at: VGA; QVGA; 1024x1024; 1424x1424; 2144x1944
Sensor control	Auto/manual exposure; auto/manual night mode; auto white balance		
Image control	Per VCam brightness/contrast/saturation; compression quality; wall/ceiling/table camera mount		
VMS supported	Most major VMS systems		
Web browser compatibility	Internet Explorer (with ActiveX plug-in, supplied); Firefox		
Certifications/Ratings/Patents/Products			
Patents	15 patents; 15 patents pending; 20 licensed patents		
Approvals	IP67; IEE802.3af Class 2; EMC: (CISPR Class A) FCC; CE; ICES-003; Safety: UL60950		
Other related products	IPZoom 360° camera and software; Conceal-mounting IP camera (IPC); Surface-mounting IP camera (IPW); Thin Conceal-mounting IP camera (IPT); Halocam-R 3-megapixel analogue camera; Halocorder high-resolution 360 recorder		

Oncam Grandeye | 115 Hammersmith Road, London W14 0QH, UK | www.oncamgrandeye.com | t: +44 (0) 207 371 6640 | e: sales@oncamgrandeye.com

Copyright 2012 by Oncam Global Group AG. Oncam Grandeye is the trading name of Oncam Global Group AG. All rights reserved. All screen images are simulated. Specifications and configurations subject to change without notice. IPZoom and the IPZoom logo are trademarks of Oncam Global Group AG (and its affiliates). SATIV is a service mark of Oncam Global Group AG (and its affiliates). The names of companies, entities, organizations and/or products/services mentioned herein may be the trademarks of their respective owners.