

# H.265 4MP PoE Bullet IR IP Camera with Vari-focal Lens




### Compact and Cost-effective 4MP Outdoor Surveillance

PLANET ICA-3460V PoE IP Camera delivers excellent picture quality in **H.265** four mega-pixel resolutions at 30 frames per second (fps). Incorporating the new CMOS image sensor and **30- to 45-meter** IR illuminators, which are specially designed for surveillance applications, the ICA-3460V provides sharp images under all lighting conditions. Moreover, it has an **IP66-rated** housing that can withstand any harsh temperature ranging from **-15°C to 55°C**. Its outdoor and handy features enable you to easily install the camera in any public areas, such as buildings, gardens, parking areas, railway stations and hospitals.



### High Efficiency Video Compression

The ICA-3460V employs the **H.265** technology to enable the camera to provide higher and more efficient image compression rates. If the same image quality level of H.264 is compared with that of H.265, the latter is able to save around 50% of bandwidth, meaning H.265 offers much higher quality video for less bandwidth. Thus, it can further enhance the overall performance of its IP surveillance system.

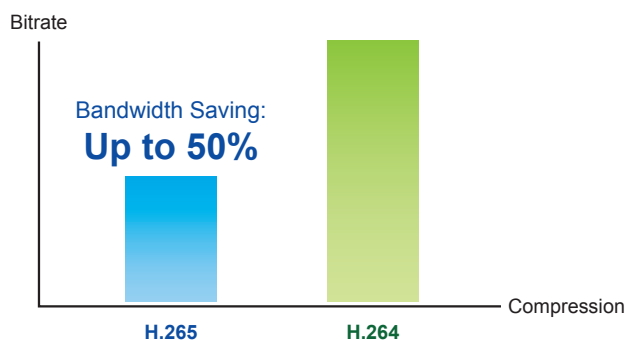

### Camera

- 1/3" progressive scan CMOS sensor
- 2.8~12 mm vari-focal, fixed-iris lens
- 0.01 lux minimum illumination at F1.2
- Maximum resolution 2592 x 1520
- 48 built-in powerful IR illuminators, effective up to 30~45 meters
- Removable IR-cut filter for Day & Night function

### Video and Audio

- Simultaneous H.264 and H.265 video compression
- Simultaneous multi-stream support
- Max. resolution of 4 mega-pixel (2592 x 1520 pixel)
- DNR to improve picture quality at low lux
- WDR enhancement function strengthens visibility under extremely bright or dark environments
- Two-way audio support with enhanced audio quality

### Network and Configuration

- Compliant with IEEE 802.3af/at PoE interface for flexible deployment
- RTSP (Real Time Streaming Protocol) protocols selectable
- FTP uploading supports more alternatives in surveillance network
- PLANET DDNS and Easy DDNS support

### Easy Installation and Management

- ONVIF compliant for interoperability
- IP66-rated housing with cable management bracket and waterproof RJ45 connector for rigorous environment
- Intelligent motion detection alarm
- Easy configuration and management via Windows-based utility or web interface


*Day & Night Surveillance*

To adapt to constantly changing lighting conditions during the day and night, the ICA-3460V comes with a removable IR-cut filter and powerful IR illuminators, which enable the camera to provide color video when there is sufficient light, and black/white video in dark conditions. The ICA-3460V is able to maintain clear images 24 hours a day.



*Exceptional Image Quality*

Together with powerful image processing attributes like Wide Dynamic Range (WDR) and 2-dimensional Noise Reduction (2DNR) technology, the ICA-3460V is able to filter the intense backlight surrounding a subject and remove noises from video signal. The result is that an extremely clear and exquisite picture quality can be produced even under any challenging lighting conditions.

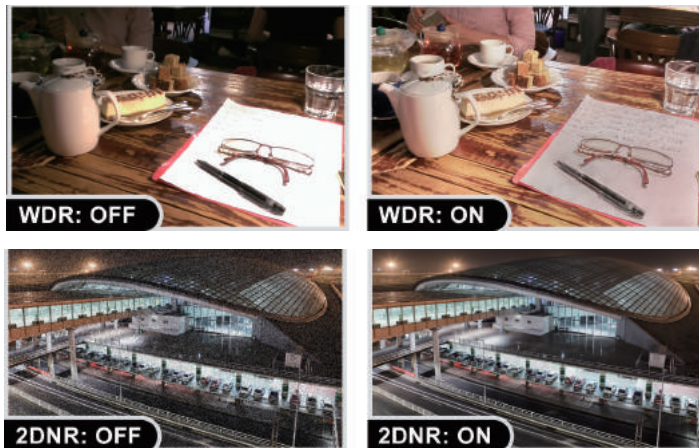

*Water Resistance and Dust-proof Protection*

The IP66-rated housing protects the camera body against rain and dust, and ensures operation under extreme weather conditions, which makes it an ideal solution for outdoor applications, such as buildings, roads, parking areas, garages, railway stations and airports.



### Advanced Media Management

The ICA-3460V supports a number of advanced features to enhance surveillance flexibility and event management capabilities. The advanced features include 4 configurable regions of privacy mask to protect personal privacy, and external RCA ports that allow accessories, such as speakers and microphones, to be added to the camera for two-way audio function.

### 2-way Audio




### Flexible Installation and Power Functionality

The ICA-3460V incorporates IEEE 802.3af/at Power over Ethernet standard and able to be powered via the network cable from a PoE power sourcing equipment such as PoE Switch or PoE injector. It thus eliminates the need for extra power cables and reduces installation costs while increases the deployment flexibility. The ICA-3460V is ONVIF compliant and thus, it is interoperable with other brands in the market. The ICA-3460V is indisputably the ideal choice for reliable and high-performance surveillance.



## Applications

PLANET ICA-3460V can perform in various surveillance applications. With high-resolution design, it can capture clear images and is perfect for identifying objects and persons. Moreover, the ICA-3460V supports 802.3af/at PoE interface, and facilitates the outdoor surveillance applications without worrying the electric source. Besides, HDVR and Web UI management make you easy to do the configuration and live viewing. With so many features offered, the ICA-3460V no doubt is your best choice for outdoor surveillance solution.

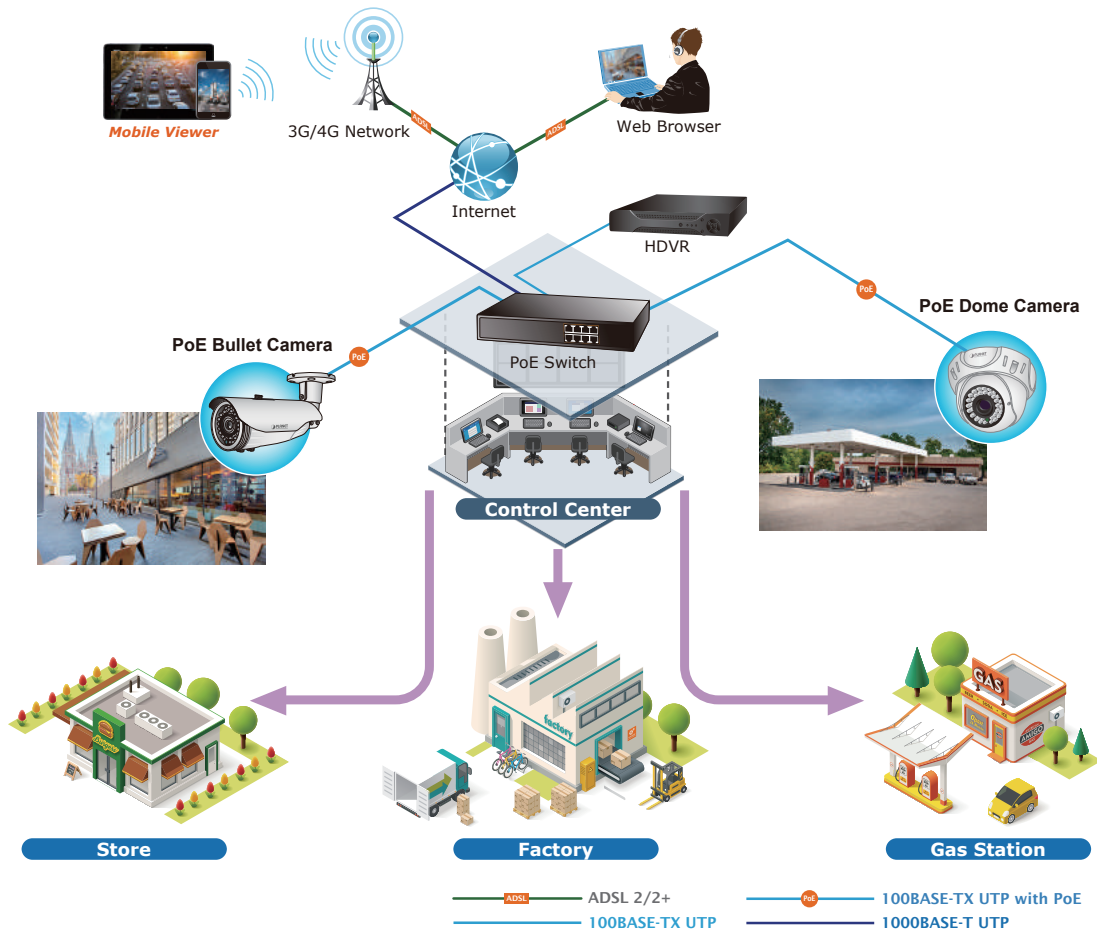

## Specifications

Product	ICA-3460V
<b>Camera</b>	
Image device	1/3" 4 mega-pixel progressive scan CMOS sensor
Lens	Vari-focal 2.8~12mm, F1.2 Angle of view: Horizontal: 27~90 degrees Vertical: 27~90 degrees
Min. Illumination	0.01 lux (color) @ F1.2 0 lux (B/W) @ IR on
IR Illuminations	IR LED x 48, 850nm Built-in IR illuminators, effective up to 30~45 meters* *The IR distance is based on the environment.
Effective Pixels	2592 x 1520 pixels
<b>Image</b>	
Video Compression	H.264/H.265
Video Resolution	2592 x 1520, 2304 x 1296, 1080p, 1280 x 1024, 960p, 720p, 704 x 576, 640 x 480, 352 x 288, 320 x 240, 176 x 144
Frame Rate	Up to 30fps* for all resolutions *The fps is based on the environment.
Bitrate	1024~8000kbps
Shutter Time	1/25~1/10000 sec
Image Setting	2D noise reduction WDR Brightness, saturation, contrast Mirror/Rotate Privacy mask (4 regions) Text, time and date overlay

Streaming	Simultaneous multi-profile streaming Streaming over HTTP or RTSP Controllable frame rate and bandwidth Constant and variable bit rate
<b>Audio</b>	
Audio Streaming	Two-way audio
Audio Compression	G.711 (A-law and $\mu$ -law)
Audio Input	Cable with RCA jack
Audio Output	Cable with RCA jack
<b>Network and Configuration</b>	
Standard	IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX IEEE 802.3af/at Power over Ethernet
Protocol	IPv4, TCP/IP, HTTP, FTP, DHCP, DNS, PLANET DDNS, RTP, RTSP, RTCP, PPPoE, NTP, SMTP
Security	Password protection
Users	3 clients on-line monitoring at the same time
<b>System Integration</b>	
Application Programming Interface	SDK for software integration ONVIF compliant
Alarm Triggering	Motion detection
Alarm Events	Event snapshot upload via FTP Notification via email, and HTTP
<b>General</b>	
Power Requirements	12V DC, 1A IEEE 802.3af/at Class 3
Power Consumption	9W (IR on)
Weight	755g
Dimensions ( $\Phi$ x L)	83.5 x 295 mm
Emission	CE, FCC
Housing	IP66-rated with cable management bracket
Connectors	10/100Mbps Ethernet, waterproof RJ45 connector DC power jack RCA audio in (white) and RCA audio out (red)
<b>Environments</b>	
Cold Boot Temperature	-10 ~ 50 degrees C
Operating Temperature	-15 ~ 55 degrees C
Operating Humidity	10 ~ 90% (non-condensing)

## Ordering Information

ICA-3460V	H.265 4MP PoE Bullet IR IP Camera with Vari-focal Lens
-----------	--

## Related Industrial PoE Switches

ICA-3250	1080p IR Bullet PoE IP Camera
ICA-4250	1080p IR Dome PoE IP Camera
ICA-4460V	H.265 4MP PoE Dome IR IP Camera with Vari-focal Lens
HDVR-430	4-Channel Hybrid Digital Video Recorder
HDVR-830	8-Channel Hybrid Digital Video Recorder
HDVR-435	H.265 4CH 5-in-1 Hybrid Digital Video Recorder
HDVR-835	H.265 8CH 5-in-1 Hybrid Digital Video Recorder
HDVR-1635	H.265 16CH 5-in-1 Hybrid Digital Video Recorder

### PLANET Technology Corporation

11F., No.96, Minquan Rd., Xindian Dist., New Taipei City 231,  
Taiwan (R.O.C.)  
Tel: 886-2-2219-9518 Fax: 886-2-2219-9528  
Email: sales@planet.com.tw www.planet.com.tw



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2019 PLANET Technology Corp. All rights reserved.

ICA-3460V