

Middle Blue

SD / 960H / HD-SDI / HD-IP

View



Features

- 3 HDD Bay
- DVD R/W
- Digital Zoom
- DDNS, DHCP, UPNP
- Multi-Languages Supported
- Privacy Zone
- Covert Channel
- Two-way Audio

Distinctive Features

- RAID1 Option
- End of Line Resistor Sensor
- Dual 485 Port
- Coaxitron
- Equalizer
- Camera Tamper Sensor
- POS
- iSCSI
- 1x eSATA

General

- OS: Embedded Linux
- Compression: H.264
- Power Supply: 12V/5A - Level 5
- Consumption: 60Watts
- Operating Temp: 5 ~ 40°C
- Humidity: 10 ~ 80%
- Net Weight (w/o HDD): 4Kg
- Certification: CE, FCC, RoHS Compliance

Network Software

- VMS, RMS, CMS

- Mac Viewer




- Smartphone Viewer



Dimensions

- Size - 430x86x270 mm

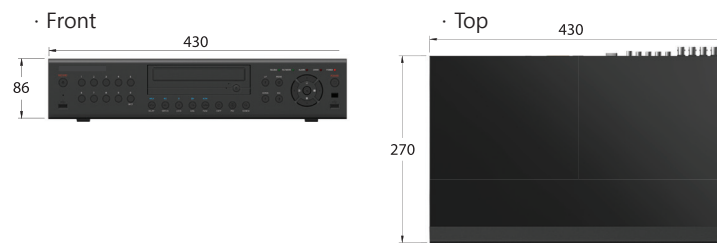

Specifications

SD

Model Name	MH-16	MH-08
Channel	16 BNC	8 BNC
Video Output	1 BNC, 1 VGA	
Spot Output	1 BNC	
Audio Input / Output	16 RCA / 1 RCA	8 RCA / 1 RCA
Compression	H.264 / G.723	
Recording Speed / Resolution	CIF real-time / Max. 704 x 480(576)	
Display Resolution	VGA: SXGA, TV: SD	
Network Interface	Ethernet 10/100/1G - RJ45	
PTZ / Keyboard Interface	RS485	
Alarm Input / Output	16/4, 8/2 - NC/NO	



960H

Model Name	MH1-16	MH1-08
System	Time Accuracy	5ppm (12.5sec/month)
	Time Sync.	NTP, GMT, DST, Time Server
	User	15 Users (Admin., User1 ~ User14)
Video	Input	16 BNC
	Output	1 HDMI, 1 VGA, 1 BNC
	Loop	16 BNC
Audio	Spot	1 BNC - Multi-channel (16/9/4/1)
	Input / Output	16 RCA / HDMI, RCA
Video Recording	Resolution	960H (960x480/576)
	Quality	5 Levels
Audio Rec	Compression	G.711U
	Interface	Ethernet 10/100/1G
Network	Compression	H.264
	Speed	Max. Q960H 8fps/ch
	Resolution	Max. 960H
Alarm	Pre/Post-Alarm	5sec / 5sec~5min
	Motion Grid	16x12 (NTSC/PAL)
Display	Input / Output	16/4 - NC/NO/EOL
	HDMI, VGA	Full HD, XGA
External Interface	TV	SDTV (720x480/576)
	PTZ / Keyboard	2 RS485 - Terminal Block
Storage	ATM / POS	RS232C - Terminal Block
		3 HDD, 1 eSATA, 1 DVD

