




### Key features

- 1/2.7 " Progressive Scan CMOS
- 2.8-12mm lens
- 1080P@30fps
- Multiple Streams
- Smart IR Up to 40m
- Low bitrate control
- 3D DNR,WDR,ICR
- Support ROI,Corridor mode,HLC

### Dimension

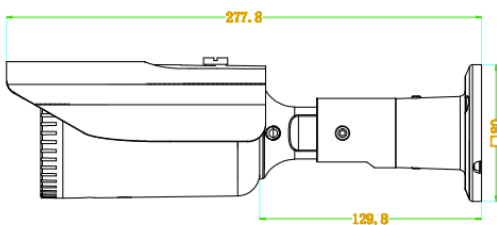

### Accessories



SN-CBK629A

### Specifications

CAMERA	
Image Sensor	1/2.7" Progressive Scan CMOS
Min. illumination	Color :0.2Lux@(F1.2,AGC ON);B/W: 0 Lux@(IR LED ON)
Day & Night	ICR
Shutter Speed	1/5-1/20000
Auto Iris	Fixed
Wide Dynamic Range	WDR >120dB
Digital Noise Reduction	2D/3D
Lens	2.8-12mm
FOV	90° -35°
IR LED	30pcs
IR Range	Up to 40m
IMAGE	
Video Compression	H.265/H.264/ MJPEG
Bit Rate (CBR/VBR)	Main stream: 1080P: 500Kbps-12Mbps , 720P: 200Kbps-8Mbps ; Sub stream 100kb-6000kb
Audio Compression	G.711 ,RAW_PCM
Max. Resolution	1920x1080/30fps
Stream	Stream 1 1920x1080/1280x720 Stream 2 D1 to QVGA Stream 3 1920x1080/1280x720/D1/VGA/640 x 360/CIF/QVGA
Image Setting	Rotate Mode, Saturation, Brightness, Contrast, Sharpness
HLC	Yes
9:16 Corridor mode	Yes
ROI	Yes
Defog	Yes
NETWORK	
Network Protocols:	IPv4,IPv6,IEEE802.1x,HTTP,HTTPS,TCP/IP,UDP/IP,RTSP,DHCP,NTP,RTCP/RTP, PPPoE, SMTP, DNS, SNMP, FTP, ICMP ,IGMP
Alarm Trigger	Perimeter ,Single Virtual Fences ,Double Virtual Fences ,Loiter ,Multi Loiter ,Object Left ,Object Removed, Abnormal Speed ,Converse, Illegal Parking ,Signal Bad , Motion Detection, Network disconnect,
RTSP Video	Standard RFC2326, Support QuickTime / VLC Player.
Security	User security authentication, Reset, Hardware Watch Dog
Web Language	English, Chinese, Polish, Italian, Portuguese, Spanish, Russian, French, Czech, Hungarian (Sunell Brand)
System Compatibility	Onvif, SDK
Interface	
Ethernet	1 Ethernet (10/100 Base-T) RJ-45 Connector
Audio I/O	N/A
Alarm I/O	N/A
RS485	N/A
BNC Output	N/A
Reset Button	N/A
Edge Storage	N/A
GENERAL	
Power Supply	DC12V/POE IEEE802.3AF
Power Consumption	2.5W(IR LED OFF); 5W (IR LED ON)
Operating Temperature	Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F)
Operating Humidity	0% - 90% RH
Ingress Protection	IP66
Approvals	CE / FCC
Product Dimensions	277*80mm
Product Weight	800g