



# 8-Port 10/100Mbps Desktop PoE Switch

TL-SF1008P

## Overview

TL-SF1008P is an 8 10/100Mbps ports unmanaged switch that requires no configuration and provides 4 PoE (Power over Ethernet) ports. It can automatically detect and supply power with all IEEE 802.3af compliant Powered Devices (PDs). In this situation, the electrical power is transmitted along with data in one single cable allowing you to expand your network to where there are no power lines or outlets, where you wish to fix devices such as APs, IP Cameras or IP Phones, etc.

**Power Over Ethernet**


- IEEE802.3af standards
- Supports PoE power up to 15.4W for each PoE port
- Supports PoE power up to 53W for all PoE ports
- Supports Priority function to protect the system when the system power is overloaded

**High Performance**

- Auto-MDI/MDIX
- Auto-negotiation
- Store and forward
- IEEE 802.3x flow control for Full-duplex Mode
- Backpressure for Half-duplex Mode
- 1k MAC address auto-learning and auto-aging

**Easy to use**

- Plug and Play design
- Fanless design

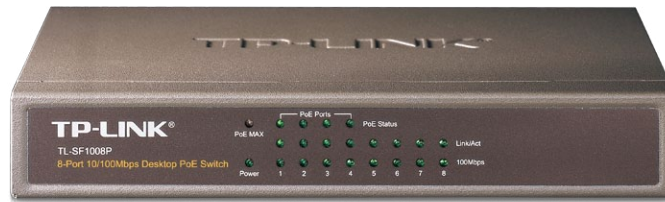

## 8-Port 10/100Mbps Desktop PoE Switch

### TL-SF1008P

**Power Over Ethernet**

4 of the 8 Auto-Negotiation RJ45 ports (port-1 to port-4) of the switch support Power over Ethernet (PoE) function. These PoE ports can automatically detect and supply power with those IEEE 802.3af compliant Powered Devices (PDs).

**- Overload Arrangement**

TL-SF1008P has the priority function which will help protect the system when the system power is overloaded. If all PoE PDs power consumption is  $\geq 53W$ , a priority will be arranged among the PoE ports, then the system will cut off the power of the lowest-priority port.

**- Port Priority Function**


Priority (port-1>port-2>port-3>port-4): This function will help protect the system if the system power becomes overloaded. For example, Port 1, 2 and 4 are using 15.4w (maximum power per port is 15.4W), the system power is 46.2w in total (PoE max LED is red ). If there is an additional PD inserted to Port 3 with 10w then the system will cut off Port 4 to protect the system, this means Port 1, 2 will use 15.4w, and Port3 will use 10w, and no power will be supplied to Port 4.

**Easy To Use**

TL-SF1008P is easy to install and use. It requires no configuration and installation. With desktop design, outstanding performance and quality, the TP-LINK TL-SF1008P 8-Port 10/100Mbps Desktop PoE Switch is a great selection for expanding your home or office network.

## Specifications

### Hardware Features & Performance

<b>Product Picture</b>	
<b>Model</b>	TL-SF1008P
<b>Standards</b>	IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3af
<b>Network Ports</b>	8*10/100Mbps RJ45 ports with 4 PoE ports (port-1 to port-4)
<b>Network Media(Cable)</b>	10Base-T: UTP category 3, 4, 5 cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m) 100Base-TX: UTP category 5, 5e cable (maximum 100m) EIA/TIA-568 100Ω STP (maximum 100m)
<b>Auto Negotiation</b>	YES
<b>Auto MDI/MDIX</b>	YES
<b>PoE Power on RJ45</b>	Power+: pin 3 & pin 6 Power -: pin 1 & pin 2
<b>Power Consumption</b>	5.8 watts. (max. no PD connected) 58.8 watts (max. with 53w PD connected)
<b>Forwarding Mode</b>	Store and Forward
<b>Switch Capacity</b>	1.6Gbps
<b>MAC Address Table</b>	1k, Auto-learning, Auto-aging
<b>Flow Control</b>	YES
<b>Backpressure</b>	YES
<b>Fanless</b>	YES
<b>LED</b>	Power, 100Mbps, Link/Act, PoE Status, PoE MAX
<b>Dimensions</b>	6.7x3.9x1.1in.(171x98x27mm)
<b>Certification</b>	CE,FCC
<b>Systems</b>	Windows 2000/XP/Vista/7 Linux/MAC OS
<b>Operating Temperature</b>	0°C ~40 °C (32 °F ~104°F )
<b>Storage Temperature</b>	-40 °C ~70 °C (-40 °F ~158°F )
<b>Operating Humidity</b>	10%~90% non-condensing
<b>Storage Humidity</b>	5%~90% non-condensing

## Ordering Information

<b>Host switches</b>	
Product Model	Description
TL-SF1008P	8-Port 10/100Mbps Desktop PoE Switch
<b>PoE Adapter</b>	
Product Model	Description
TL-POE10R	PoE Splitter
<b>Router</b>	
Product Model	Description
TL-R470T+	Load Balance Broadband Router
TL-R480T+	Load Balance Broadband Router