

# ND8322P

8-CH Embedded Plug & Play NVR



8x PoE Ports · 2x HDD · Auto Setup · Fisheye Dewarp · Mobile EZConnect · Auto Adaptive Stream · HDMI/VGA Monitor Display


VIVOTEK ND8322P is a Linux embedded 8-CH standalone NVR with 8-port 802.3af Compliant PoE, allowing connection with PoE cameras for a max. 80 W power supply. ND8422P also features "One Button Setup" with its plug-&-play and auto-setup functionality, making this advanced unit surprisingly simple to install, and suitable for any small-scale video surveillance applications.

Supporting HDMI and VGA local video output, users can control the GUI OSD interface via mouse & keyboard, eliminating the need for a separate PC to search video or to playback from the NVR. The new local display design - Auto Adaptive Stream will dynamically modify Stream 2 resolution of a camera to best fit the display resolution according to the layout type, resulting in an efficient display, while maintaining superb image quality. Meanwhile, ND8322P supports software fisheye camera de-warping function, providing right angle of video view and detailed information for usage. What's more, ND8322P, featuring various I/O ports, such as eSATA port, alarm input/output, RS232, and RS485 provides users great flexibility of applications.

With VAST CMS, users can set up IP surveillance system with ease. For remote and mobile access, VIVOTEK also provides EZConnect and iViewer app, for both iOS and Android handheld devices, enabling users to monitor live video anytime, anywhere.

## Key Features

- Plug & Play One Button Auto Setup
- EZConnect by Scanning QR Code for 24/7 Mobile Viewing
- Intuitive, Elegant Interaction UI
- 8x 802.3af Compliant PoE Ports
- VIVOTEK Camera Configuration and VAST CMS Integrated
- Live and Playback Fisheye Dewarp
- Embedded Linux OS
- e-SATA for Extension Storage
- Story Board Event Search
- ONVIF Open Platform
- Fanless Design
- Up to 5MP Camera Liveview & Playback

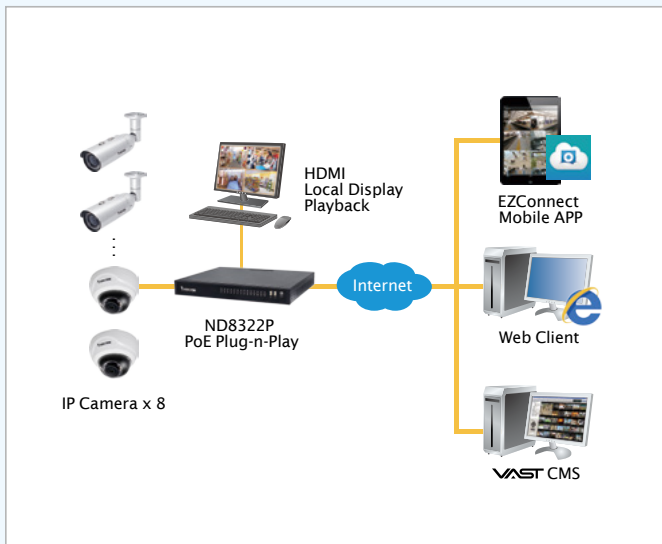

ND8322P Application Scenario



Convenience Store



Restaurant



Clothing Specialty



Electronics Specialty

## Hardware Information

Model	ND8322P
<b>System</b>	
OS	Embedded Linux
CPU	ARM Processor
Flash	256 MB
RAM	1 GB
Watchdog	Hardware + Software
Power Restoration	System Restart Automatically after Power Recovery
<b>Storage</b>	
HDD Devices	Internal x2
HDD Max. Capacity	6 TB x2
Disk Management	Create, Format and Remove Disk HDD S.M.A.R.T
<b>Video</b>	
Video Output	HDMI x1, VGA x1
Resolution	1920x1080, 1280x720
Graphics Decoder	Hardware decoding
Decoding Capacity	H.264: 2560x1920 @ 30 fps (1-CH) 1920x1080 @ 120 fps (4-CH) 1280x720 @ 240 fps (8-CH)
Camera Position	Change the viewcell position on the Live View screens
<b>External Interface</b>	
USB Interface	Front: 2 (USB 2.0) Back: 1 (USB 2.0)
Alarm In	8
Alarm Out	4
Audio	3.5 Phone Jack Audio Output x1 3.5 Phone Jack Audio Input (Reserved) x1
External HDD	eSATA Port x1
RS232	1 Port (Reserved)
RS485	1 Port (Reserved)
<b>Network</b>	
Network Interface	10/100/1000Mbps Ethernet (RJ-45) x1 *It is highly recommended to use standard Cat. 5e & Cat. 6 cables which are compliant with the 3P/ETL standard.


PoE	8x 802.3af Compliant PoE Ports (Total Max. 80W)
Protocols	IPv4, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, SMTP, FTP, DHCP, NTP, DNS, DDNS, IP Filter
<b>Power</b>	
Power Input	DC 56V 2.5A
Power Consumption	Max. 120 W
<b>LED Indicator</b>	
LED Indicator	Power, Status, Record, HDD1, HDD2, eSATA, Ethernet, Port 1 ~ Port 8
<b>Mechanic</b>	
Form Factor	Desktop
Operation Buttons	Power (Front) / Reset (Back)
Dimensions	360 (W) x 311 (D) x 44 (H) mm
Weight	2.7 kg (without HDD)
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Humidity	0 ~ 95%
<b>General</b>	
Safety Certifications	CE, LVD, FCC, VCCI, C-Tick
Warranty	24 months
<b>Client PC Requirements</b>	
Operating System	Microsoft Windows OS: XP/Vista/7/8/2008/2012
CPU	Intel Celeron or above
Memory	2 GB or above
Ethernet	10/100Mbps
Display Resolution	1024x768 pixels or above
Web Browser	Internet Explorer 10 (32 bit) or above
Software AP	Installation Wizard 2, ST7501, VAST
Mobile/Tablet App	EZConnect (iOS/Android), iViewer (iOS/Android)
<b>Accessories</b>	
CD	User's Manual, Quick Installation Guide (QIG), Installation Wizard 2
Others	Power Adapter, Power Cord, Quick Installation Guide, 16 x H.D.D. Screws, 4 x H.D.D. Brackets, 1 x USB Mouse, 2 x SATA Cables

## Software Information

<b>Record</b>	
Maximum Channel	8
Record Throughput (MB)	64 Mbps
Network Throughput (MB)	48 Mbps
Audio Format	G.711, G.726
Video Format	MJPEG, H.264
Video Resolution	VGA, 1MP, 2MP, 3MP & 5MP Camera
Recording Time (sec.)	Pre-Record: 5 (Max. 10) Post-Record: 20 (Max. 300)
Recording Stream	Single
Recording Mode	Continuous, Schedule, Manual, Event, Activity Adaptive Streaming
Recording Setting	Recycle (unit: Day)
Recording Path	Local Path
Record Video Format	3GP
<b>LiveView (Local Display)</b>	
Stream Application	Auto Adaptive Stream
LiveView Display	8 Channel Multi Layout display: 1x1, 1x3 (Corridor View), 2x2, 3x3, 1+5, 1+3, 1+1+3 (1P), 1+3+3 (1P)
Monitor Enhancement	OSD Display (NVR), OSD Display (Camera), Camera Information, Remote I/O Control, Event Notification, Aspect Ratio Fisheye Dewarp: 10,1P,1R,1O3R
PTZ Control	Panel Control
PTZ Operation	Direction Control, Home, Iris, Preset, Patrol (Group), PiP Control
<b>Playback (Local Display)</b>	
Playback Display	1 Channel Multi Layout Display: 1x1
Playback Control	Regular (Play, Pause, Stop), Rewind, Next / Previous Frame, Speed Control, Calendar, Event, Timeline, Timeline Scale, Thumbnail (Storyboard)
Video Search	By calendar, date/time, and alarm
Thumbnail Explorer (Storyboard)	Listing the thumbnail of recorded video (Max. 2 CH)
Monitor Enhancement	OSD Display (Camera), Event Notification, Aspect Ratio, PiP Control, Fisheye Dewarp (10,1P,1R,1O3R)
Snapshot	JPEG
Video Clip Export	EXE
<b>LiveView (Remote)</b>	
Stream Application	Stream Selection
Audio Capability	One Way
LiveView Display	8 Channel Multi Layout display: 1x1, 2x2, 3x3, 1+3, 1+5
Monitor Enhancement	OSD Display (NVR), Drag & Drop, Image Freeze, Audio Control, Remote I/O Control, Event Notification, Bookmark, Fisheye Dewarp (10, 1P, 1R)
PTZ Control	Panel Control
PTZ Operation	Direction Control, Home, Zoom, Focus, Iris, Preset, Patrol (Group), PiP Control
Snapshot	JPEG
<b>Playback (Remote)</b>	
Playback Display	4 Channel Multi Layout Display: 1x1, 2x2, 1+3
Playback Control	Regular (Play, Pause, Stop), Next Frame, Speed Control, Calendar, Timeline, Timeline Scale, Bookmark

Monitor Enhancement	OSD Display (NVR), Drag & Drop, Audio Control, PiP Control, Fisheye Dewarp (10, 1P, 1R)
Snapshot	JPEG
Video Clip Export	EXE
<b>Alarm Management</b>	
Schedule Type	Continuous, Schedule, Manual
Event	Motion Detection, PIR Detection, Tampering Detection, Digital Input (Camera), Digital Output (Camera), Connection Abnormal, Storage Abnormal, Storage Full, Camera Network Loss, DI, DO
Action	Record, Email (Text), Email (Snapshot), FTP, Buzzer, PTZ Control (Go to Preset), NVR DO, Camera DO
Recording Time (sec.)	Pre-Record: 5 (Max. 10), Post-Record: 20 (Max. 300)
<b>Backup</b>	
Manual	USB Dongle (FAT Format)
<b>System</b>	
User Management	User Account: 16 User Account Time Limit: 10 mins User Level: Administrator / Regular User User Feature Definition: By Camera
Log	System, Recording, User, Error
Date&Time	Time Zone, Manual, Automatic Sync NTP, Daylight Saving Time
Firmware	Manual update
Restore Default	Supported
Backup/Restore (Configuration)	Supported
Language	Czech, English, French, German, Italian, Japanese, Korean, Portuguese, Russian, Spanish, Simplified Chinese, Traditional Chinese
<b>Camera Intergration</b>	
Insert Camera	Manual, Search
Video (Media) Setting	Compression, Resolution, FPS, Video Quality
Image Setting	Image Display, Image Adjustment
PTZ Control	Panel Control
PTZ Operation	Direction Control, Home, Preset, Patrol (Group)
Motion Detection	Supported
<b>Device Intergration</b>	
UPS	APC Model Compatible

## Dimensions



All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved.

Ver. 16