



Product Highlights

Power More Devices

Eight Power over Ethernet (PoE) ports allow you to power more PoE-capable cameras, access points, and <u>VoIP phones</u> using standard Ethernet cabling

Powerful PoE

IEEE 802.3at PoE (up to 30 W per port) and a highcapacity 125 W PoE budget are perfect for 802.11ac devices and multi-featured IP cameras

Gigabit Uplink Connections

One Gigabit Ethernet and one SFP uplink port allow for additional connections to storage or an uplink network



DGS-1010MP 10-Port Gigabit PoE Switch

Features

High-Speed Networking

- Eight 10/100/1000 Mbps PoE Ethernet access ports
- One Gigabit Ethernet and one SFP uplink port for uplink connections
- Full/half-duplex for 10/100 Mbps Ethernet and full-duplex for 1000 Mbps Ethernet

Reliability

- IEEE 802.3x Flow Control
- Store-and-forward switching scheme
- RoHS compliant

Easy Setup

- Plug and play installation
- Auto MDI/MDI-X crossover on all ports

Desktop and Rackmount Design

- Rack-mountable 11" metal casing (1U)
- Fanless design

PoE Functionality

- IEEE 802.3at-compliant
- 125 W total power budget
- Up to 30 W power output per port

The D-Link DGS-1010MP 10-Port Gigabit PoE Switch is an ideal solution for small offices and enterprise environments looking to expand the network with a set of Power over Ethernet devices such as wireless access points, IP cameras, and IP phones. Built with small business and enterprise users in mind, the DGS-1010MP is a high-speed, flexible switch that features a fanless, quiet design so it can be conveniently placed anywhere in a working environment.

Power Over Ethernet

The DGS-1010MP features eight 10/100/1000BASE-T ports that support the IEEE 802.3at Power over Ethernet (PoE) standard. Each of the eight PoE ports can supply up to 30 W, with a total combined PoE budget of 125 W, allowing users to power up to four IEEE 802.3at-compliant devices without requiring an additional power supply. This allows devices to be installed in locations without any power outlets, saving on installation costs and reducing the time it takes to install new devices.

Superior Performance

The DGS-1010MP is fully plug and play, meaning installation is quick and easy and requires no additional configuration. Support for Auto MDI/MDI-X on all ports eliminates the need for crossover cables when connecting to another switch or hub. Auto-Negotiation on each port senses the link speed of a network device (either 10, 100, or 1000 Mbps) and intelligently adjusts for optimal compatibility and performance. With store-and-forward switching, the DGS-1010MP also maximizes network performance while minimizing packet loss during data transmission. In addition, the DGS-1010MP features one Gigabit Ethernet and one SFP uplink port for high-speed connections to remote storage or for long distance fiber connections to an uplink network. Combining the convenience of PoE, superior performance, and ease of use, the DGS-1010MP is the ideal choice for flexibly expanding your network while remaining cost-efficient.



DGS-1010MP 10-Port Gigabit PoE Switch

Compact and Silent Design


The DGS-1010MP has a compact 11" design, so that it can be deployed in any easily accessible location on the work floor, allowing you to power a set of PoE-powered devices while avoiding additional cable clutter. Alternatively, the standardized 1U-sized housing means the switch can also be mounted in a standard 19" rack and be integrated in a server infrastructure. The DGS-1010MP is furthermore built around a fanless design. This makes the switch suitable to be used closer to, or in populated areas where it works efficiently while guaranteeing a quiet working environment.

Green Technology

The DGS-1010MP supports IEEE 802.3az Energy-Efficient Ethernet (EEE), reducing power consumption of the switch when network utilization is low and minimizing operating costs during periods of inactivity. By using EEE-compliant devices with the DGS-1010MP, organizations can noticeably reduce power consumption by having the switch automatically put ports into sleep mode when they are not being used.

Limited Lifetime Warranty

D-Link offers a Limited Lifetime Warranty on the DGS-1010MP to further its commitment to product quality and long-term customer confidence¹.

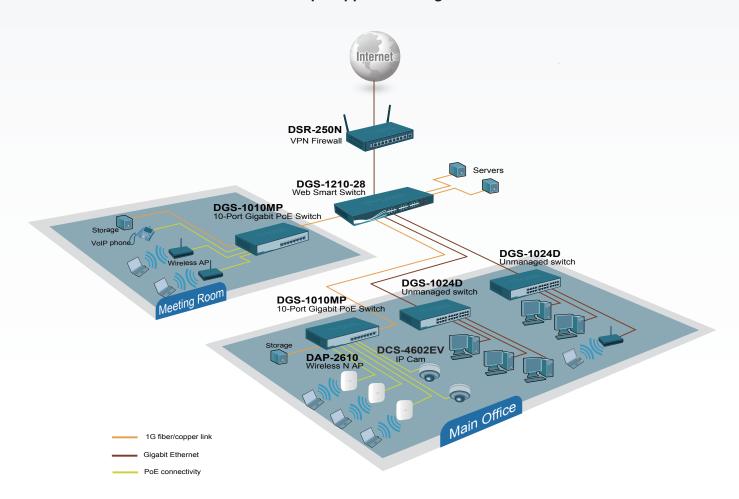

Example Application Diagram



Technical Specifications

General		
Hardware Version	• A1	
Size	• 11-inch desktop/rackmount size, 1U height	
Number of Ports	8 x 10/100/1000 Mbps PoE ports 1 x 10/100/1000 Mbps Ethernet uplink port 1 x 100/1000 Mbps SFP uplink port	
Port Standards & Functions	• IEEE 802.3i 10BASE-T Ethernet• IEEE 802.3at Power over Ethernet• IEEE 802.3u 100BASE-TX Fast Ethernet• IEEE 802.3az Energy-Efficient Ethernet• IEEE 802.3ab 1000BASE-T Gigabit Ethernet• IEEE 802.3x Flow Control• IEEE 802.3z Gigabit fiber• ANSI/IEEE 802.3 NWay auto-negotiation	
Switching Capacity	• 20 Gbps	
Media Interface Exchange	Auto MDI/MDI-X	
Transmission Method	Store-and-forward	
MAC Address Table	4K entries per device	
Packet Buffer Memory	• 192 KB per device	
Packet Filtering / Forwarding Rates	Ethernet Fast Ethernet 14,880 pps per port 148,8	• Gigabit Ethernet 800 pps per port • 1,488,000 pps per port
Data Transfer Rates		ernet • Gigabit Ethernet Abps (half-duplex) • 2000 Mbps (full-duplex) Abps (full-duplex)
Network Cables		Cat 5/5e (100 m max.) • UTP Cat 5/5e (100 m max.) IA-568 100-ohm STP (100 m • EIA/TIA-568 100-ohm STP
Physical		
LED Indicators	 Per port: activity / link and speed Per port: power / status 	Per device: PoE Max
Dimensions	• 280 x 180 x 44 mm (11.02 x 7.08 x 1.73 in)	
Power Input	• 100 to 240 V AC, 50/60 Hz	
Maximum PoE Budget	• 125 W	• PoE up to 30 W per port
Power Consumption	• 7.32 W (PoE off)	• 133.8 W (PoE on)
Temperature	• Operating: 0 to 40 °C (32 to 104 °F)	• Storage: -10 to 70 °C (14 to 158 °F)
Humidity	Operating: 0% to 95% RH non-condensing	Storage: 0% to 95% RH non-condensing
EMI	CE Class A FCC Class A VCCI Class A	CCC Class A FCC Class A
Safety	• cUL • CB	• CCC • LVD

DGS-1010MP 10-Port Gigabit PoE Switch

Order Information		
Part Number	Description	
DGS-1010MP	10-Port Gigabit PoE Switch	

1 Limited Lifetime Warranty available in USA only. Warranty void when not purchased from Authorized US D-Link reseller. Please visit us.dlink.com for list of authorized US resellers.

Updated 2018/09/12

For more information

U.S.A. | 17595 Mt. Herrmann Street | Fountain Valley, CA 92708 | 800.326.1688 | dlink.com

©2018 D-Link Corporation/D-Link Systems, Inc. All rights reserved. D-Link and the D-Link logo are registered trademarks of D-Link Corporation or its subsidiaries in the United States and/or other countries. Other trademarks or registered trademarks are the property of their respective owners. All references to speed are for comparison purposes only. Product specifications, size and shape are subject to change without notice, and actual product appearance may differ from that depicted herein.