

# XRN-820S

8CH NVR



FC | UL LISTED | CE | EAC

## Key Features

- Up to 8CH 32MP supported
- Max. 100Mbps network camera recording
- HDMI out
- User friendly UI / UX
- AI search support when working with Wisenet AI camera
- Dynamic Event support
  - New event function of cameras is available without software update
- H.265, H.264, MJPEG codec supported
- Plug & play by 8 PoE ports
- Bookmark management (Up to 100 set)
- SATA 2ea (Up to 12TB)

Display		
Network camera	Inputs	Max. 8CH
	Resolution	32MP ~ CIF
	Protocols	SUNAPI, ONVIF
Decoding	Local Display	FHD : HDMI & VGA Dual monitor UHD : HDMI Single monitor
	Multi Screen Display	[Local Monitor] 1/ 2V/ 2H/ 3V/ 4/ 6/ 8/ 9/ Sequence [Web] 1/ 2H/ 2V/ 3V/ 4/ 6/ 8/ 9
	Resolution	[Local Monitor] FHD Clone mode : 32M(15fps, H.265 Only), 12M(30fps, H.265 Only), 8.3M(50fps), 1080p(240fps), D1(480fps) UHD Single mode : 32M(15fps, H.265 Only), 12M(30fps, H.265 Only), 8.3M(50fps), 1080p(240fps), D1(270fps) FHD Expand mode: 32M(12fps, H.265 Only), 12M(25fps, H.265 Only), 8.3M(30fps), 1080p(90fps), D1(200fps) Expand mode : Max 15fps when displaying 8CH
Performance		
Operating System	Embedded	Linux
Record	Compression	H.265, H.264, MJPEG
	Recording Bandwidth	Max. 100Mbps
	Resolution	32MP ~ CIF
	Mode	Normal, Dual Stream, Schedule(Continuous/Event), Event (Pre/Post), Bookmark
	Event Trigger	Alarm Input, Video Loss, Camera Event(Sensor, MD, Video Analytics, Defocus, Audio), Dynamic Event
	Event Action	e-Mail, Event Push, PTZ Preset, Alarm Out, Buzzer, Monitor Out
Search & Play	Playback Bandwidth	Max. 32Mbps
	User	Max. 4 Users (Local 1, Remote 3)
	Simultaneous playback	Max. 32CH(Local 8CH, Remote 8CH per user)
	Fisheye Dewarping	CMS
	Mode	Date & Time(Calendar), Event list, Text Search, Smart Search
	Resolution	CIF ~ 32MP (Up to H.264 8.3MP, H.265 32MP)
	Playback Control	Fast/Slow Forward / Backward, Move one step Up / Down
Storage	Supported HDD	Up to 6TB
	HDD Slot	SATA 2ea(Max. 12TB)
Backup	File backup	BU/Exe(GUI), JPG/AVI(Network)
	Function	Multi channel(Up to 8CH) Play, Date-Time/Title display
Network		
Protocol	IPv4, IPv6, TCP/IP, UDP/IP, RTP (UDP), RTP (TCP), RTSP, NTP, HTTP, DHCP (Server, Client), SMTP, ICMP, IGMP, ARP, DNS, DDNS, uPnP, HTTPS, SNMP, ONVIF (Profile-S), SUNAPI(Server, Client)	
DDNS	Hanwha DDNS	

<b>Transmission Bandwidth</b>		Max. 100Mbps
<b>Audio</b>	<b>Input/Output</b>	8 CH(network)
	<b>Compression</b>	G.711, G.726, AAC(16/48KHz)
	<b>Audio Communication</b>	2-Way
<b>Max Remote Users</b>		Search(3), Live Unicast(10), Multicast(20)
<b>Security</b>		IP address filtering, User access Log, 802.1x, Encryption Device certificate(Hanwha Techwin Root CA), Signed firmware
<b>Web viewer</b>	<b>Supported OS</b>	Windows 10, macOS 10.13
	<b>Supported browser</b>	Google Chrome, Microsoft Edge, Mac Safari, Firefox
<b>Viewer Software</b>		WAVE, SSM, Webviewer, Smart Viewer, Wisenet mobile Support SDK/CGI(SUNAPI) for integration to 3'rd party VMS
<b>Functions</b>		
<b>Camera Setup</b>	<b>Register</b>	Auto, Manual
	<b>Item</b>	IP address, Add profile edit, Bitrate, Compression, GOP, Quality, Camera MD setup (4, 8 point polygon) Camera video setup (Simple focus, Brightness/Contrast, Flip/Mirror, IRIS, WDR, D&N, SSNR, Shutter, SSSDR, DIS), Fisheye Dewarping Mode, Hallway View Setup, Camera Webpage
<b>PTZ</b>	<b>Control</b>	Via GUI, Webviewer, SPC-2000
	<b>Preset</b>	300 Presets
<b>Smart phone</b>	<b>Support Model</b>	iOS, Android
	<b>Protocol Support</b>	RTP, RTSP, HTTP, CGI(SUNAPI)
	<b>Control</b>	Live 8CH(Multi-Profile Support), Playback 4CH
	<b>Max. Remote Users</b>	Search(3), Live Unicast(10)
<b>Redundancy</b>	<b>Failover</b>	N+1
	<b>ARB</b>	Support
<b>Easy configuration</b>		P2P(QR code)
<b>Interface</b>		
<b>Front</b>	<b>Indicator</b>	HDD, Alarm, Power, Record, Backup, Network
<b>Storage</b>		OK
<b>HDMI</b>		1EA 3840x2160 30Hz
<b>VGA</b>		1EA 1920x1080 60Hz
<b>Audio</b>		Out 1EA
<b>Ethernet</b>		PoE RJ-45 8EA (LAN, 10/100), RJ-45 2ea (LAN/WAN 1Gbps)
<b>Alarm</b>		In 4EA, Out 2EA
<b>USB</b>		3EA(Front 2 x USB 2.0, Rear 1 x USB 3.0)
<b>Power inlet</b>		AC 1EA
<b>System</b>		
<b>Log</b>	<b>Log List</b>	Max. 100,000 (System Log, Event Log each)
<b>System Control</b>		Mouse, Web, Controller (SPC-2000)

<b>Language</b>	English, French, German, Italian, Spanish, Russian, Turkish, Polish, Dutch, Swedish, Czech, Portuguese, Danish, Rumanian, Serbian, Croatian, Hungarian, Greek, Norwegian, Finnish, Korean, Chinese, Japanese, Thai, Vietnamese
-----------------	--

<b>Environmental</b>	
----------------------	--

<b>Operating Temperature</b>	0°C to +40°C(32°F to 104°F)
<b>Operating Humidity</b>	20% ~ 85% RH

<b>Electrical</b>	
-------------------	--

<b>Power Input</b>	100 ~ 240 VAC ±10%; 50/60 Hz
<b>Power Consumption</b>	Max 160W
<b>PoE Budget</b>	100W





<b>Mechanical</b>	
-------------------	--

<b>Color / Material</b>	Black
<b>Dimension (WxHxD)</b>	370 x 50.7 x 324.3 mm
<b>Weight</b>	2.7Kg

<b>Intelligent Analysis</b>		
-----------------------------	--	--

<b>AI Search</b>	<b>Object Attribute</b>	Compatible for Wisenet AI Camera
------------------	-------------------------	----------------------------------

- The latest product information / specification can be found at [hanwha-security.com](http://hanwha-security.com)
- Design and specifications are subject to change without notice.
- Wisenet is the proprietary brand of Hanwha Techwin, formerly known as Samsung Techwin.

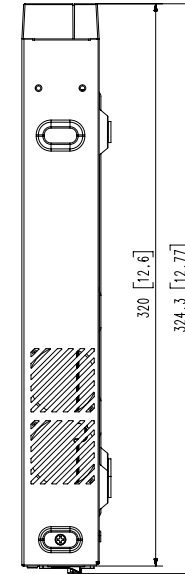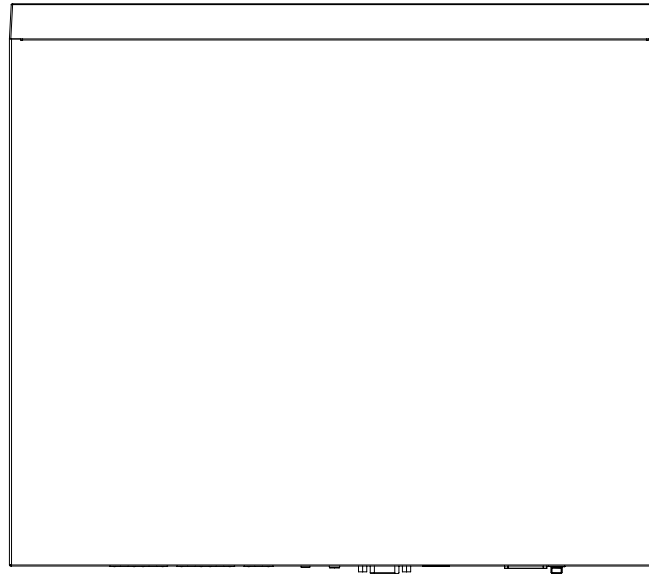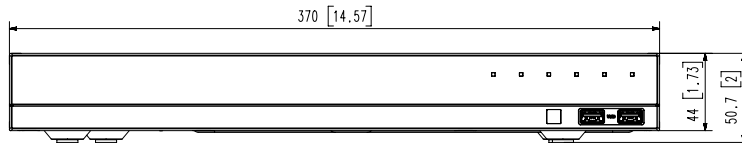

3		
2		
1	XRN-820S	'20.11.06
No.	MODEL NAME	DATE
Unit:mm[inch]		SCALE:1/2
Hanwha Techwin		

A2

© Hanwha Techwin Co.,Ltd. All rights reserved.