


DS-2PT3306IZ-DE3(2mm) Triple-Directional PanoVu Mini Camera

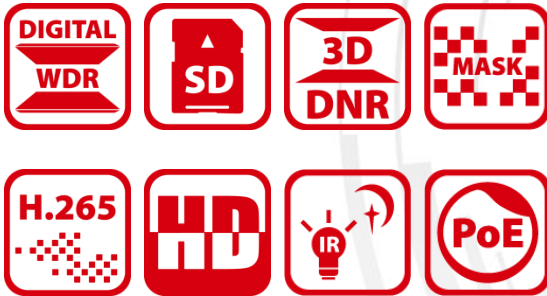

Overview

Hikvision DS-2PT3306IZ-DE3(2mm) Triple-Directional PanoVu Mini Camera can be widely used in multiple indoor scenes such as the store, classroom, office hall, hotel lobby, and airport lobby, etc.

Functions

- Three 1/2.8" progressive scan CMOS
- Up to 3-ch 1920 × 1080@30fps resolution
- Min. illumination:
Color: 0.05 Lux @(F2.0, AGC ON)
B/W: 0.01 Lux @(F2.0, AGC ON)
0 Lux with IR
- Horizontal FOV: 128.5° × 3
Vertical FOV: 75.7°
- Up to 10 m IR radius



DORI

The DORI (detect, observe, recognize, identify) distance gives the general idea of the camera ability to distinguish persons or objects within its field of view.

It is calculated based on the camera sensor specification and the criteria given by EN 62676-4: 2015.

DORI	Detect	Observe	Recognize	Identify
Definition	25 px/m	63 px/m	125 px/m	250 px/m
Distance (Tele)	26.7 m (87.6 ft)	10.6 m (34.8 ft)	5.3 m (17.4 ft)	2.7 m (8.9 ft)

Specification


Camera	
Image Sensor	Three 1/2.8" progressive scan CMOS
Min. Illumination	Color: 0.05 Lux @(F2.0, AGC ON) B/W: 0.01 Lux @(F2.0, AGC ON) 0 Lux with IR
White Balance	Auto/Manual/ATW (Auto-Tracking White Balance)/Indoor/Outdoor/Fluorescent Lamp/Sodium Lamp
Shutter Time	1/25 s to 1/30,000 s
Day & Night	IR Cut Filter
Focal Length	2 mm
Aperture Range	F2.0
FOV	Horizontal field of view: 128.5° × 3 Vertical field of view: 75.7°
Resolution (Sub-stream enabled)	Main stream: 50 Hz: 20 fps (1920 × 1080, 1280 × 960, 1280 × 720) 60 Hz: 20 fps (1920 × 1080, 1280 × 960, 1280 × 720) Sub-stream: 50 Hz: 20 fps (704 × 576, 640 × 480, 352 × 288) 60 Hz: 20 fps (704 × 480, 640 × 480, 352 × 240)
Resolution (Sub-stream not enabled)	Main stream: 50 Hz: 25 fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 576, 640 × 480, 352 × 288) 60 Hz: 30 fps (1920 × 1080, 1280 × 960, 1280 × 720, 704 × 480, 640 × 480, 352 × 240)
Video Compression (Sub-stream enabled)	Main stream: H.265/H.264 Sub-stream: H.265/H.264/MJPEG (MJPEG is only supported by channel 1) H.264 with Main Profile/High Profile, H.265 with Main Profile
Video Compression (Sub-stream not enabled)	Main stream: H.265/H.264/MJPEG (MJPEG is only supported by channel 1) H.264 with Main Profile/High Profile, H.265 with Main Profile
Audio Compression	G.711alaw/G.711ulaw/G.722.1/G.726/MP2L2
IR Radius	10 m
Smart Coding	ROI, SVC
Smart Record	ANR (Automatic Network Replenishment)
Basic Event Detection	Motion Detection, Video Tampering Detection, Exception
Smart Event Detection	Audio Exception Detection, Intrusion Detection, Line Crossing Detection (Smart event detection is only supported by channel 1)
Privacy Mask	4 × 3 programmable privacy masks
Smart Image Enhancement	Digital WDR/HLC/BLC/3D DNR/Defog/Regional Exposure
Network	
Network Storage	Built-in memory card slot, support Micro SD/SDHC/SDXC, up to 256 GB
Protocols	IPv4/IPv6, HTTP, HTTPS, 802.1x, Qos, FTP, SMTP, UPnP, SNMP, DNS, DDNS, NTP, RTSP, RTCP, RTP, TCP/IP, DHCP, PPPoE, Bonjour
API	Open-ended, support ONVIF, ISAPI, and CGI, support HIKVISION SDK and Third-Party Management Platform
User/Host	Up to 32 users 3 levels: Administrator, Operator and User

Security Measures	User authentication (ID and PW), Host authentication (MAC address); HTTPS encryption; IEEE 802.1x port-based network access control; IP address filtering
Client	iVMS-4200, iVMS-4500, iVMS-5200, Hik-Connect
Web Browser	IE8 to 11, Chrome 31.0 to 44, Firefox 30.0 to 51
Interface	
Network Interface	1 RJ45 10 M/100 M Ethernet
Audio Interface	1-ch audio input and 1-ch audio output
General	
Power	12 VDC, 2.0 A & PoE (802.3 at), 42.5 to 57 VDC, 0.6 A, Class4 Max.20 W (Max. 6 W for IR)
Working Temperature	-10°C to 50°C (14°F to 122°F)
Working Humidity	≤ 90%
Protection Level	TVS 2000V Lightning Protection, Surge Protection and Voltage Transient Protection
Material	PC & Aluminum alloy
Dimensions	Φ 183 mm × 76 mm (Φ 7.20" × 2.99")
Weight	Approx. 0.68 kg (1.50 lb)

Available Model

DS-2PT3306IZ-DE3(2mm), 12 VDC & PoE (802.3 at, class 4)

Dimensions

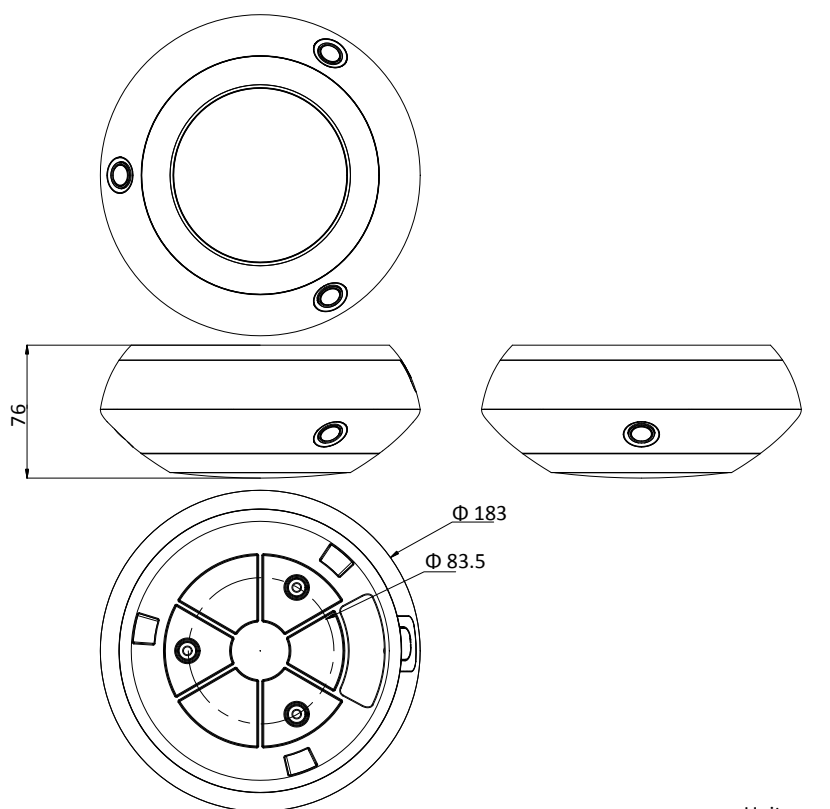

Accessories



DS-1294ZJ-TRL Wall Mounting Bracket



DS-1271ZJ-PT10 Pendant Mounting Bracket

Distributed by



HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Australia
T +61-2-8599-4233
salesau@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision Canada
T +1-866-200-6690
sales.canada@hikvision.com

Hikvision Thailand
T +662-275-9949
sales.thailand@hikvision.com

Hikvision Europe
T +31-23-5542770
sales.eu@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Brazil
T +55 11 3318-0050
Latam.support@hikvision.com

Hikvision Turkey
T +90 [216]521 7070- 7074
sales.tr@hikvision.com

Hikvision Malaysia
T +601-7652-2413
sales.my@hikvision.com

Hikvision UK & Ireland
T +01628-902140
sales.uk@hikvision.com

Hikvision South Africa
Tel: +27 (10) 0351172
sale.africa@hikvision.com

Hikvision France
T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Kazakhstan
T +7-727-9730667
nikia.panfilov@hikvision.ru

Hikvision Vietnam
T +84-974270888
sales.vt@hikvision.com

Hikvision UAE
T +971-4-4432090
salesme@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Tashkent
T +99-87-1238-9438
uzb@hikvision.ru

Hikvision Hong Kong
T +852-2151-1761
info.hk@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Korea
T +82-(0)31-731-8817
sales.korea@hikvision.com

Hikvision Poland
T +48-22-460-01-50
info.pl@hikvision.com

Hikvision Indonesia
T +62-21-2933759
Sales.Indonesia@hikvision.com

Hikvision Colombia
sales.colombia@hikvision.com