

OPTICAL NETWORK VIDEO TECHNOLOGIES (SHENZHEN) CO., LTD.

Product Datasheet

6-Port 10/100M AI PoE Switch

(ONV-H1064PLD)



OVERVIEW

The ONV-H1064PLD series is a 10/100M unmanaged AI PoE switch independently developed by ONV. It has 4*10/100Base-TX RJ45 ports and 2*10/100Base-TX RJ45 ports. Port 1-4 can support IEEE802.3af/at standard PoE. single port PoE power reaches 30W, and the maximum PoE output power is 65W. It can support the watchdog function. When the port communication failure corresponds to the port POE will automatically restart, self-recover network communication, reducing manual intervention and maintenance. As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to POE terminal equipment such as wireless AP, webcam, VoIP phone, building visual access control intercom through network cable, to meet the network environment that needs high-density PoE power supply, suitable for hotels, campuses, parks, supermarkets, scenic spots, Factory quarters and SMB small and medium-sized enterprises form a cost-effective network.

Unmanaged mode, plug, and play, no configuration, easy to use.

FEATURE

■ 10/100 Mbps access, Dual RJ45 port uplink

- ◇ 6*10/100Base-TX RJ45 ports allow users to flexibly network to meet the networking requirements of various scenarios.
- ◇ Support non-blocking wire-speed forwarding.
- ◇ Support full-duplex based on IEEE802.3x and half-duplex based on Backpressure.

■ Intelligent PoE power supply

- ◇ 4*10/100Base-TX PoE ports, meeting the needs of security monitoring, teleconferencing system, wireless coverage, and other scenarios.
- ◇ IEEE 802.3af/at PoE standard, without damaging non-PoE devices.
- ◇ 4*10/100Base-TX PoE ports can support the watchdog function, real-time detection of data communication status.

■ Innovative function

- ◇ long-distance transmission and VLAN mode (E): When the switch status is “ON” (default OFF), Port 1-4 rate is 10M/250m transmission, the port physical VLAN isolated, broadcast storm, the transmission distance can up to 250m; solve the problem of poor transmission caused by line aging.
- ◇ AI self-healing mode (D): When the switch status is “ON” (default OFF), port 1-4 can support the watchdog function and automatically detects the data communication status in real-time.
- ◇ Power supply priority mode: the power supply priority function of PoE port is on by default, and the power output of the leftmost PoE port (port 1) is guaranteed in priority, so as to eliminate the potential safety hazard of overload use.

■ Stable and reliable, Easy to use

- ◇ Low power consumption, galvanized steel casing, no fan.
- ◇ Self-developed power supply, high redundancy design, providing a long term and stable PoE power output.

- ◇ CCC, CE, FCC, RoHS.
- ◇ Plug and play, no configuration, easy to maintain.
- ◇ The user-friendly panel, it can show the device status through the LED indicator of PWR, Link, PoE.


TECHNICAL SPECIFICATION

Model	ONV-H1064PLD	ONV-H1108PLD
Interface Characteristics		
Fixed Port	4*10/100Base-TX PoE ports (Data/Power) 2*10/100Base-TX uplink RJ45 ports (Data)	8*10/100Base-TX PoE ports (Data/Power) 2*10/100Base-TX uplink RJ45 ports (Data)
Ethernet Port	Port 1-6 (1-10) can support 10/100BaseT (X) auto detect, full / half duplex MDI / MDI-X adaptive	
Twisted Pair Transmission	10BASE-T: Cat3,4,5 UTP(≤100 meter) 100BASE-TX: Cat5 or later UTP(≤100 meter)	
Function Switch	E file: long distance transmission and VLAN isolation function (Default: OFF, Use:ON)	
	D File: AI self-healing mode. When the network fails, PoE watchdog will restart the power supply of the device and automatically repair the network communication. (Default: OFF, Use:ON)	
	Note: The function switch can control different functions, which can be enabled separately and simultaneously.	
Chip Parameter		
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T, IEEE802.3u 100Base-TX IEEE802.3x	

Forwarding Mode	Store and Forward(Full Wire Speed)	
Switching Capacity	1.6Gbps	2Gbps
Forwarding Rate@64byte	0.89Mpps	1.488Mpps
MAC	1K	2K
Buffer Memory	768K	1.25M
Jumbo Frame	1536byte	
LED Indicator	Power: PWR (green), Network: Link (yellow), POE : PoE (green) functional switch:EXTEND (green)	
PoE & Power		
PoE Port	Port 1 to 4 IEEE802.3af/at @ POE	Port 1 to 8 IEEE802.3af/at @ POE
Power Supply Pin	Default: 1/2(+),3/6(-), Optional: 4/5(+),7/8(-)	
Max Power Per Port	30W; IEEE802.3af/at	
Total PWR / Input Voltage	65W (AC100-240V)	120W (AC100-240V)
Power Consumption	Standby<3W, Full load<65W	Standby<5W, Full load<120W
Power Supply	Built-in power supply, AC 100~240V 50-60Hz 1.0A	Built-in power supply, AC 100~240V 50-60Hz 2.2A
Physical Parameter		
Operation TEMP / Humidity	-20~+55°C;5%~90% RH Non condensing	
Storage TEMP / Humidity	-40~+80°C;5%~95% RH Non condensing	
Dimension (L*W*H)	143*115*40mm	195*130*40mm
Net /Gross Weight	<0.6kg / <1.0kg	<0.8kg / <1.2kg
Installation	Desktop, Wall-mounted	
Certification & Warranty		
Lightning protection / protection level	Lightning protection: 4KV 8/20us; Protection level: IP30	


Certification	CCC;CE mark, commercial; CE/LVD EN60950;FCC Part 15 Class B; RoHS;
Warranty	1 year, lifelong maintenance.

DIMENSION

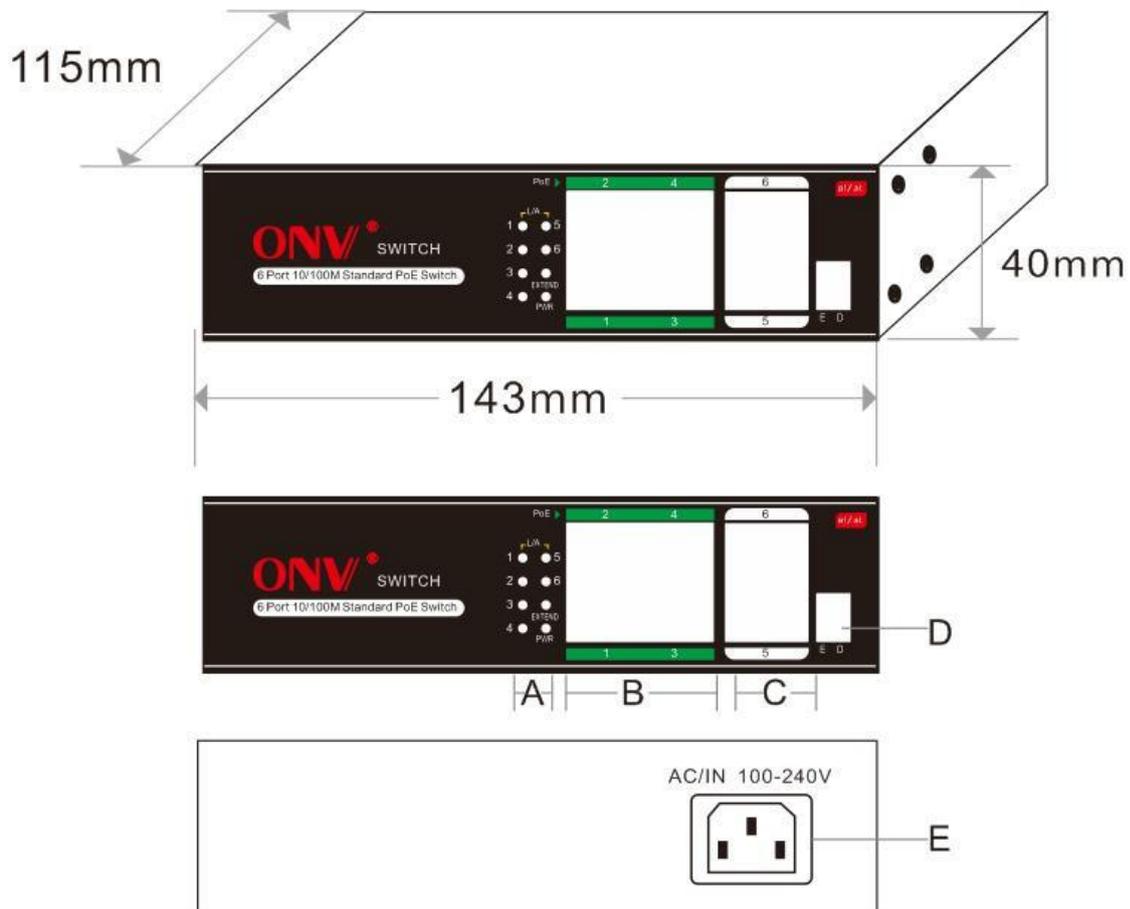

- A. Working indicator
- B. 4*10/100M PoE ports
- C. 2*10/100M uplink RJ45 ports
- D. Functional switch
- E. Power input port AC100-240V, 50/60Hz

APPLICATION

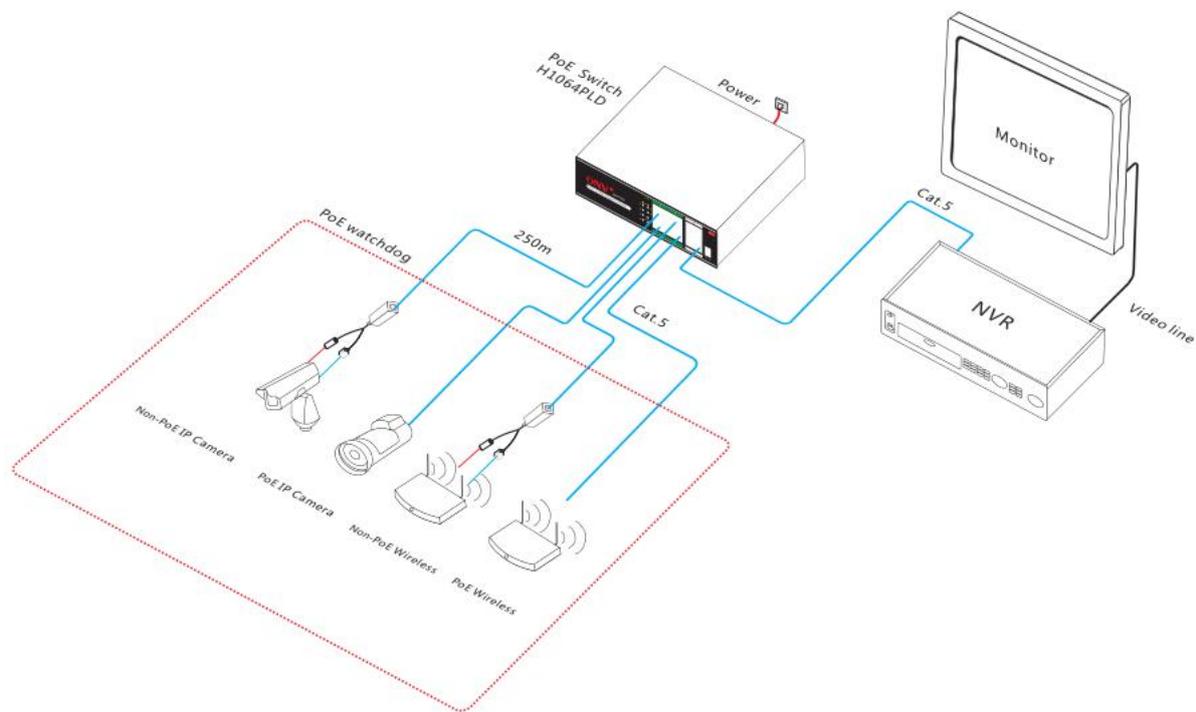

ORDERING INFORMATION

Model	Description
ONV-H1064PLD	Unmanaged AI PoE switch with 6*10/100M RJ45 ports. Port 1-4 can support IEEE 802.3af/at PoE standard. Adjust function switch, Port 1-4 can support VLAN isolation, 10M/250m transmission, AI self-healing. Built-in 65W power supply.
ONV-H1108PLD	Unmanaged AI PoE switch with 10*10/100M RJ45 ports. Port 1-8 can support IEEE 802.3af/at PoE standard. Adjust function switch, Port 1-8 can support VLAN isolation, 10M/250m transmission, AI self-healing. Built-in 120W power supply.

Note: Default no hanging ears, if you need , you need to buy.

PACKING LIST

	CONTENT	QTY	UNIT
PACKING LIST	6-port 10/100M AI PoE switch	1	SET
	AC Power Cable	1	PC
	User Guide	1	PC
	Warranty Card	1	PC

CONTACT US



OPTICAL NETWORK VIDEO TECHNOLOGIES (SHENZHEN) CO., LTD

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Email: onv@onv.com.cn

Website: www.onvcom.com

Zip: 518000

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen, China

Factory Address: The 4-6th Floor, No. 59, HuaNing Road, Xinwei Community, Dalang Street,
Longhua District, Shenzhen, China

