

V2108 Series

USB Joystick Controller



Features


- USB interface, plug and play
- Industrial ID design
- Industrial grade 3-axis joystick for PTZ control function, with long working life
- Six predefined PTZ function keys: Iris+/-, Focus+/-, Zoom+/-
- Panel mount kit in package
- No external power supply requirement
- Suitable for right-hand or left-hand operation



Ordering Information

V2108 USB Joystick Controller, with assignable keys and 3-axis joystick, 5 VDC/ 80mA (maximum)

Keyboard Layout

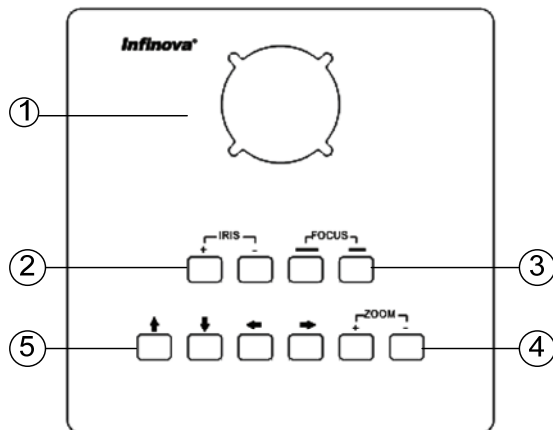


1. Joystick
2. IRIS +/-
3. FOCUS near/far
4. ZOOM +/-
5. Direction key for live window switching

Description

Infinova V2108 USB Joystick Controller is designed for facilitating network video surveillance such as PTZ camera control. With its 3-axis joystick, 6 dedicated PTZ function keys (Iris+/-, Focus+/-, Zoom+/-) and other 4 direction keys for live window switching, V2108 helps users operate in a more intuitive way.

Infinova V2108 USB Joystick Controller is compatible to USB 1.1 and USB 2.0 interfaces, and supports desktop mounting and sunk-in mounting. With its simple design, it is much easier to use.

Dimension

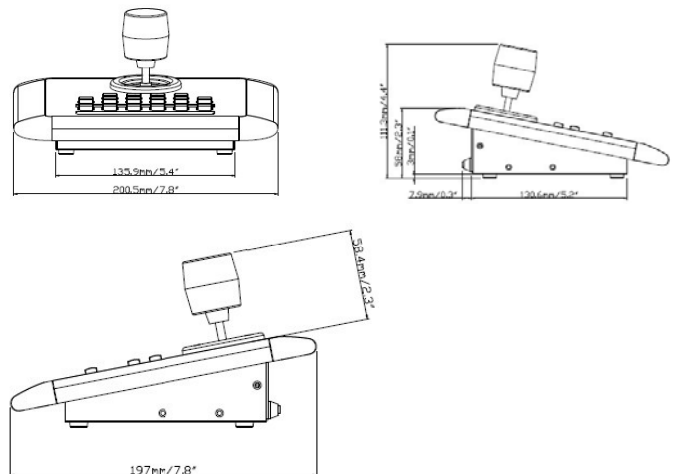

Specifications

General	Default Protocol	USB HD class 3 axis Game controller
	Interface	USB1.1 (USB2.0 compatible)
	Keys	10 (Iris+/-, Focus+/-, Zoom+/-, ←, →, ↓, ↑)
	Length/Color of USB cable	1.8 meter/ Black
	Mounting Method	Desktop, Sunk-In
Electrical	Power Consumption	USB bus power 5 VDC/ 80mA (maximum)
Mechanical	Dimension(W x D x H)	7.89" x 7.89" x 4.38" (200.5mm x 200.5mm x 111.3mm)
	Unit Weight	1.83lb (830g)
Environmental	Operating Temperature	32°F~140°F (0°C~60°C)
	Operating Humidity	0~90%RH (non-condensing)
Certifications	CE/FCC class A	
Compliance	ROHS	