### **Product Datasheet**

# 6-port 10/100Mbps PoE Switch

(ONV-H1064PL)



### **OVERVIEW**

The ONV-H1064PL is a 10/100Mbps unmanaged PoE switch independently developed by ONV. it has 4\*10/100M PoE ports and 2\*10/100M uplink RJ45 ports, Port 1-4 can support IEEE 802.3af/at standard PoE power supply, single port PoE power up to 30W, and the maximum POE output power is 65W. As a PoE power supply device, it can automatically detect and recognize the power receiving equipment that meets the standard and supply power through the network cable. It can supply power to POE terminal equipment such as wireless AP, webcam, VoIP phone, video access control intercom, etc. through network cable to meet the network environment that needs high-density PoE power supply. It is suitable for hotels, campuses, factory quarters and small and medium-sized enterprises to form an economy. Efficient network.

Unmanaged model, plug and play, no configuration, easy to use.

### **FEATURE**

#### ■ 10/100Mbps access, Dual RJ45 port uplink

- Provides 4\*10/100Base-TX RJ45 ports and 2\*10/100Base-TX RJ45 ports for flexible networking and meets the networking requirements of various scenarios.
- ♦ All ports support non-blocking wire-speed forwarding for smoother transmission.
- ♦ Support IEEE 802.3x full-duplex flow control and Backpressure half-duplex flow control.

#### ■ Intelligent PoE power supply

- 4\*10/100Base-TX RJ45 ports, meeting the needs of security monitoring, teleconferencing system, wireless coverage, and other scenarios.
- ♦ IEEE802.3af/at PoE standard, without damaging non-PoE devices.
- Priority system for PoE port, it will supply power to the high priority level port first when the power budget is insufficient and avoid overwork of the device.

#### Innovative function

- ♦ Long distance mode: When opening, the speed of port 1-4 is reduced to 10M. With the existing twisted pair cable, the transmission limit of the twisted pair line can be broken, and the transmission distance can reach 250 meters; on the other hand, It can solve the problem of poor transmission caused by line aging.
- Video monitoring mode: When opening, Port 1-4 is isolated from each other but communicate with port 5-6 to prevent DHCP conflicts, optimize port cache utilization, and reduce broadcast storms.

#### ■ Stable and reliable, easy to use

- ♦ CCC,CE, FCC, RoHS.
- ♦ Plug and play, no configuration, simple and convenient.
- ♦ Low power consumption, galvanized steel casing, no fan.
- ♦ The user-friendly panel, it can show the device status through the LED indicator of PWR, PoE.


Self-developed power supply, high redundancy design, providing a long term and stable PoE power output.

## **TECHNICAL SPECIFICATION**

Model	ONV-H1064PL	ONV-H1108PL			
Interface Characteristics					
Fixed Port	4*10/100Base-TX PoE ports	8*10/100Base-TX PoE ports			
	(Data/Power)	(Data/Power)			
	2*10/100Base-TX uplink RJ45	2*10/100Base-TX uplink RJ45 ports			
	ports (Data)	(Data)			
Ethernet Port	Port 1-6/1-10 can support 10/100Base-TX auto-detection, full/half-duplex				
	MDI/MDI-X auto-sensing				
Functional Switch	1*(Extend+ VLAN)				
	Note: when the switch state changes, it must be restarted before the PoE				
	switch function can take effect				
Twisted Pair	10BASE-TX: Cat5 or later UTP(≤250 meter)				
Transmission	100BASE-TX: Cat5 or later UTP(≤100 meter)				
Chip Parameter					
Network Protocol	IEEE802.3 10BASE-T, IEEE802.3i 10Base-T				
	IEEE802.3u 100Base-TX, IEEE802.3x				
Forwarding Mode	Store and Forward(Full Wire Speed)				
Switching Capacity	1.6Gbps (Non-blocking)	2Gbps (Non-blocking)			
Forwarding	0.00Mmm	1.488Mpps			
Rate@64byte	0.98Mpps				
MAC	1K				
Buffer Memory	768K				
Jumbo Frame	9.6K				


LED Indicator	Power:PWR (Green), network : L/A(Yellow), PoE : PoE (Green)				
LLD Indicator	Functional switch: EXTEND (Green)				
PoE & Power Supply					
PoE Port	Port 1 to 4 Port 1 to 8				
Power Supply Pin	Default 1/2(+), 3/6(-)				
Max Power Per Port	30W, IEEE802.3af/at				
Total PWR / Input Voltage	65W/ (AC100-240V)	120W/ (AC100-240V)			
Power Consumption	Standby<3W, Full load <65W	Standby <5W, Full load <120W			
Dower Supply	Built-in power supply,	Built-in power supply, AC100~240V			
Power Supply	AC100~240V 50-60Hz 1A	50-60Hz 2.2A			
Physical Parameter					
Operation TEMP /	-20~+55°C;5%~90% RH Non condensing				
Humidity					
Storage TEMP /	-40~+75°C;5%~95% RH Non condensing				
Humidity	10 . 10 0,070 0070 tall from condensing				
Dimension (L*W*H)	140*115*40mm	195*130*40mm			
Net /Gross Weight	<0.6kg / <1kg	<0.8kg / <1.2kg			
Installation	Desktop, wall-mounted				
Certification & Warranty					
Lightning Protection	Lightning protection: 4KV 8/20us, Protection level: IP30				
/ Protection Level					
Certification	CCC, CE mark, commercial, CE/LVD EN60950				
	FCC Part 15 Class B, RoHS				
Warranty	1 year, lifelong maintenance.				

# **DIMENSION**

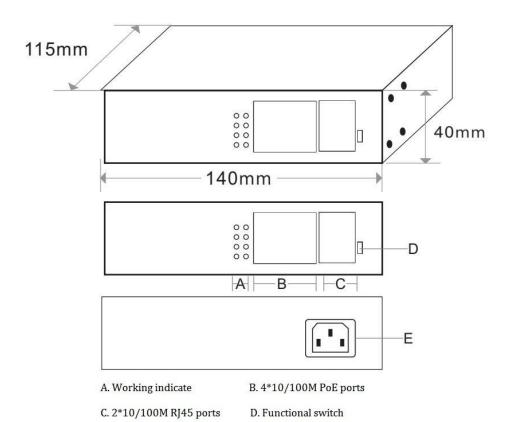

E. Power input port(AC100-240V,50/60Hz)

# **APPLICATION**

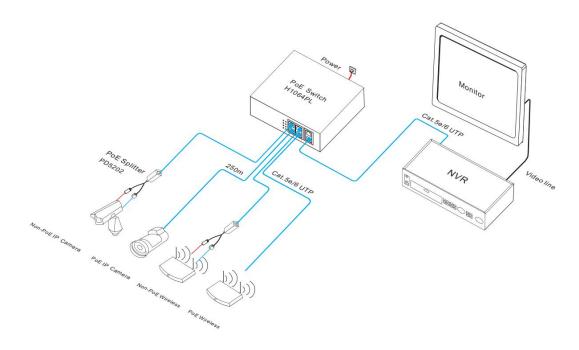

# **ORDERING INFORMATION**

Model	Description	
ONV-H1064PL	Unmanaged PoE switch with 4*10/100M PoE ports and 2*10/100M uplink	
	RJ45 ports. Port 1-4 can support IEEE802.3af/at PoE standard. Adjust	
	function switch, Port 1-4 can support 10M/250m transmission. Built-in 65W	
	power supply.	
ONV-H1108PL	Unmanaged PoE switch with 8*10/100M PoE ports and 2*10/100M uplink	
	RJ45 ports. Port 1-8 can support IEEE802.3af/at PoE standard. Adjust	
	function switch, Port 1-8 can support 10M/250m transmission. Built-in 120W	
	power supply.	
<b>Note:</b> The PoE switch is not included hanging ear by default and needs to be purchased separately.		

### **PACKING LIST**

PACKING LIST	CONTENT	QTY	UNIT
	6-port 10/100Mbps PoE switch	1	SET
	AC Power Cable	1	PC
	User Guide	1	PC
	Warranty Card	1	PC

## **CONTACT US**



OPTICAL NETWORK VIDEO TECHNOLOGIES (SHENZHEN) CO., LTD.

Tel: 0086-755-33376606

Fax: 0086-755-33376608

Email: onv@onv.com.cn

Website: www.onvcom.com

Zip: 518000

Headquarter Address: Room 1003, Block D, Terra Building, Futian District, Shenzhen, China

Factory Address: The 4-6th Floor, No. 59, HuaNing Road, Xinwei Community, Dalang Street,

Longhua District, Shenzhen, China

