

Impressive Cost Performance Ratio

SCD-2021R

High Resolution Small IR Dome Camera

- High resolution of 650TV lines
- Min. Illumination 0Lux (IR LED on), IR distance 20m
- Built-in fixed lens (3.6mm), DNR, 12V DC



High Resolution Small IR Dome Camera

SCD-2021R




Specifications

	SCD-2021RN		SCD-2021RP
VIDEO			
Imaging Device	1/3" CMOS		
Total Pixels	680(H) x 512(V)		
Scanning System	2 : 1 Interlace		
Synchronization	Internal		
Frequency	H : 15.734Hz / V : 59.94Hz		H : 15.625Hz / V : 50Hz
Horizontal Resolution	Color : 650TV lines		
Min. Illumination	0Lux (IR LED on)		
S / N Ratio	46dB (AGC off, Weight on)		
Video Output	CVBS : 1.0 Vp-p / 75Ω composite		
LENS			
Focal Length (Zoom Ratio)	3.6mm		
Angular Field of View	H : 75.7° / V : 66° / D : 90°		
Min. Object Distance	0.2m (0.66ft)		
Lens Type	Fixed		
Mount Type	Board type		
OPERATIONAL			
Day & Night	Auto		
Digital Noise Reduction	Auto		
Gain Control	Auto		
White Balance	Auto (3,200°K ~ 6,500°K)		
IR Distance	20m (IR LED 12ea)		
ENVIRONMENTAL			
Operating Temperature / Humidity	-10°C ~ +40°C (+14°F ~ +104°F) / Less than 90% RH		
ELECTRICAL			
Input Voltage / Current	12V DC		
Power Consumption	Not fixed		
MECHANICAL			
Color / Material	Ivory / Plastic		
Dimensions (WxH)	Ø93.0 x 78.0mm (Ø3.66" x 3.07")		
Weight	160g (0.35 lb)		

Dimensions

Unit : mm (inch)

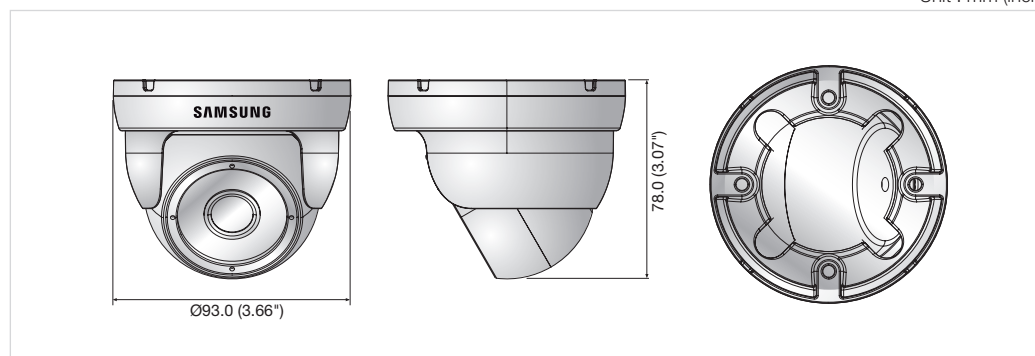

The **Eco mark** represents Samsung Techwin's will to create environment-friendly products, and indicates that the product satisfies the EU RoHS Directive.

Design and specifications are subject to change without notice.

■ DISTRIBUTED BY

SAMSUNG TECHWIN AMERICA Inc.

100 Challenger Rd. Suite 700 Ridgefield Park, NJ 07660

Toll Free : +1-877-213-1222 Direct : +1-201-325-6920

Fax : +1-201-373-0124



SAMSUNG TECHWIN