



2M x3/x3 HD IP BULLET CAMERA



NEW PHIB-H300TW



Features

New Concept of Two Sensor Camera System

Twin-One camera is combine two image into each ROI. It combines with one image and transmits it to high definition Full HD video.

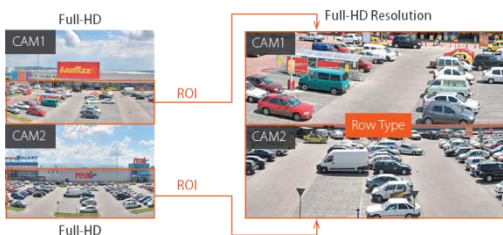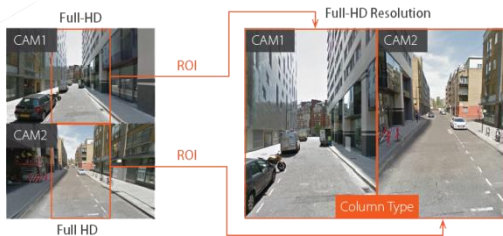

Using Ultra-Low Light sensor

With 2M 1/1.9"CMOS image sensor, you can check High image quality and clear color images in dim light environment. It also has the ability to powerful low noise effect and outstanding noise reduction.

Useful zoom capability

x3 optical zoom, x12 digital zoom, excellent automatic focusing, and 3.6 ~ 10mm focus range. Especially, since the aperture is F1.5 ~ F2.5, it is possible to acquire better quality image than any other camera.

Easily adjustable two-Universal joint camera gimbal

It is designed with two universal joint structures that enable camera angle to be adjusted freely.

System additional Benefits

By connecting of Full-HD image with two cameras via one Ethernet, the bandwidth, license of recording server, storage and installation cost are reduced by 50%.

Weather Proof Design

With IP67 protection, the camera ensures normal operation regardless of rain, snow or storm.

Specifications

Camera

Image Device	1/1.9" Progressive Scan CMOS
Effective Pixels	Approx. 2.35 Mega pixels
Aspect Ratio	HD: 16:9 SD: 4:3
Zoom Ratio	Optical x3, Digital x12
Focal Length	f = 3.6 ~ 10.0mm, F1.5 ~ F2.5
Horizontal angle	102.5°(W) ~ 59.8°(T)
MIN. Illumination	COLOR : 0.005 Lux@F1.5 B/W : 0.0005 Lux@F1.5, 0 Lux (IR)
Day & Night	Auto(CDS/CAM) / Day / Night(ICR)
Focus	Auto/Manual
DNR(2D/3D)	OFF/Level Adjustment(1~5)
Shutter Speed	1 sec ~ 1/10,000sec(60/30 mode) 1 sec ~ 1/10,000sec(50/25 mode)
AGC	Auto/Manual
White Balance	Auto/Indoor/Outdoor/Manual
WDR/BLC	OFF/BLC/WDR(Digital)
Other Function	Defog(Digital), HLC, Dynamic slow shutter

General

Sensor In /Out	Built-in 2 Input / 1 Output(Relay)
Audio In / Out	1 Audio In / 1 Audio Out
Video Out	BNC: VBS 1.0 Vp-p
IR distance	More than 70M, Wave: 850nm
Power	DC12V 1.5A(Max. 18W) Optional : PoE IEEE802.3at
Approvals*	KC, IP67
Housing	Weather proof / Vandal Proof Structure
Material	Body : Aluminum Die-casting
Dimension	210 x 118 x 304 mm
Weight	3Kg (approx.)
Operating Temp.	-20°C ~ 50°C


Network

Ethernet	10Base-T/100Base-Tx
Video Compression	H.265/H.264/MJPEG
Video Stream	Main 1080p/720p
	Second D1/CIF/QCIF
	Third 1080p/720p/D1/CIF/QCIF
Stream Type	Video/Complex(Video/Audio) Stream
Frame Rate	Max. 30 /25 fps for 1080P/720P/D1/CIF/QCIF
Bitrate	30Kbps ~ 16Mbps. Supports CBR/VBR/FIX QP
Audio Compression	Two way, G.711 A-law, G.711 μ-law, 128kbps, sampling rate 8kHz
Local Storage	Micro SD/SDHC/SDXC card. Support up to 128GB
IVA	Motion Detection, Occlusion Detection, Line Crossing*, Region entrance/exiting*, Intrusion*, Tampering*, etc
Alarm actions	Email, Micro SD/SDCH/SDXC Record, Relay Output, Snapshot, Notification of Client
Alarm	Pre-Post Alarm
Max No. of Clients	10 users(Depending on user bandwidth)
Web Browser	IE 6.0 above
Protocols Support	IPv4 IPv4/IPv6*, TCP/IP, UDP, RTP, RTSP, RTMP, NTP, HTTP, HTTPS*, SSL*, DNS, DDNS, DHCP, FTP, SMTP, ICMP, SNMP*
	DDNS Public DDNS services Support: www.dyndns.com
	ONVIF PROFILE S
	Security User Authentication(ID/PW), IP Address/Mac Address filtering*

The specifications are subject to change without prior notice. (*) This feature is under development and will be added in the future.

Dimension

Unit: mm

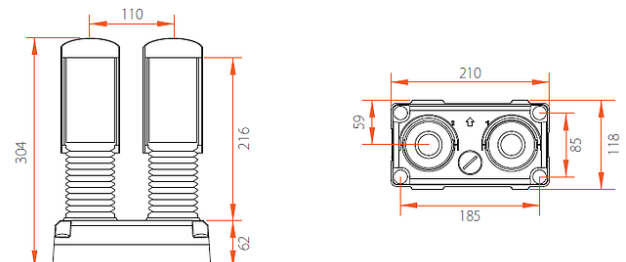

PROBEDIGITAL Co.,Ltd.

#107 Hyundai I-Valley, 31, Galamchi-ro 244beon-gil, Jungwon-gu, Seongnam-si, Gyeonggi-do, 13212, Rep. of Korea

Tel: + 82.31.777.3490 | Fax: + 82. 31. 777. 3493 | E-mail: sales@probedigital.co.kr

www.probedigital.co.kr