

SN-ADR2308E2

4MP 8CH 2HDD Hybrid DVR



- Supports AHD/TVI/CVI/CVBS/IP video inputs
- Supports VGA, HD-OUT, CVBS output
- Easy to use Same Interface of GUI/WEB/Client
- Support various mobile monitoring: (IOS, Android)
- Support more than languages
- Perfect protection circuit, unique triple watchdog function
- Supporting web, IMS, provide SDK development

System Overview

Sunell Eco series hybrid DVR are 4 / 8 / 16 CH 4MP high definition DVRs with ability to connect analog and IP cameras simultaneously, which adopt the standard H.264 high profile compression format and the most advanced SOC technique to ensure real time recording in each channel and realize outstanding robustness of the system. This series DVR is support 4 / 8 / 16 CH video input, 1 / 1 / 1 CH audio input, simultaneous 4 / 8 / 16 CH playback. This series is ideal for a wide range of applications such as home safety, grocery, warehouse, education, and financial institutions

Functions

AHD/TVI/CVI/CVBS Auto-detect

The DVR can auto recognize the signal of front-camera without any setting. It makes operation more friendly and convenient.

Coaxial Audio/Upgrade/Alarm

The integrated design can reduce wiring troubles which makes it much more cost-effective and convenient for installation.

Smart Search

This function helps you get more motion detect video during a short time through drawing a region when playback. It is very useful when an emergency occurs.

P2P

Monitor at anytime and anywhere.



Easily and conveniently manage the device.

Technical Specification

| System | |
|---------------------------|---|
| Main Processor | Embedded processor |
| Operating System | Embedded LINUX |
| Video and Audio | |
| Analog Camera Input | 8ch BNC |
| AHD Camera | 4MP / 3MP / 1080P / 720P @25/30fps |
| TVI Camera | 1080P / 720P @25/30fps |
| CVI Camera | 1080P / 720P @25/30fps |
| CVBS Camera | PAL/NTSC |
| IP Camera Input | 4ch, each channel up to 4MP |
| Audio In/Out | 8ch input, 1ch output, RCA |
| Two-way Talk | N/A |
| Display | |
| Interface | 1ch HD-OUT, 1ch VGA, 1ch CVBS |
| Resolution | HD-OUT: 1920x1080, 1280x1024, 1440x900 VGA: 1920x1080, 1280x1024, 1440x900 |
| Multi-screen Display | 1/4/9 |
| Recording | |
| Compression | H.264 High Profile |
| Resolution | 4MP/3MP/1080P/720P/960H &etc. |
| Record Rate | 4MP@8fps, 3MP@10fps, 1080P@15fps, 720P @25fps |
| Bit Rate | 1Kbps ~ 6144Kbps Per Channel |
| Record Mode | Manual, Event, Timer |
| Record Interval | Post-record: 5 ~ 60s |
| Video Detection and Alarm | |
| Trigger Events | Recording, Buzzer, Push message, Pop up message |
| Video Detection | Motion Detection, Video Loss, Camera Tamper |
| Alarm in/out | 4/1 |

| Network | |
|-----------------------|--|
| Interface | 1 RJ-45 port (10/100Mbps) |
| Network Function | HTTP, TCP/IP, UDP, NTP, DHCP, DNS, IP Filter, DDNS, |
| Max. User Access | Access 5 users |
| Smart Phone | iPhone, iPad, Android |
| Interoperability | ONVIF 2.6, SDK |
| Playback and Backup | |
| Playback | 8/4/1 |
| Search Mode | Time /Date, Alarm, Picture grid, Event |
| Playback Function | Play, Pause, Stop, Next Frame, Fast play, Slow Play, Layout, Shuffle, Backup Selection, Digital Zoom |
| Backup Mode | USB HDD |
| Storage | |
| Internal HDD | 2 SATA Ports, up to 6TB for each HDD |
| Mounting Mode | Embedded |
| eSATA | N/A |
| Interface | |
| USB | 2 ports (USB 2.0 x2) |
| RS232 | N/A |
| RS485 | 1 Port, for PTZ Control |
| General | |
| Power Supply | DC12V/4A |
| Power Consumption | Max 10W (without HDD) |
| Operating Temperature | -10 °C ~ 50 °C (14 °F ~ 122 °F) |
| Storage Conditions | Less than 90% RH |
| Certifications | CE/FCC |
| Dimensions | 350mm(L)x305mm(W)x49mm(H) |
| Net Weight | 1900g |

Dimensions(mm)

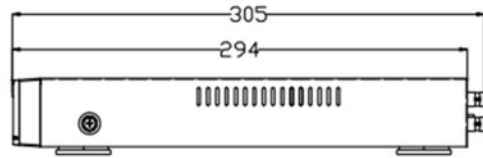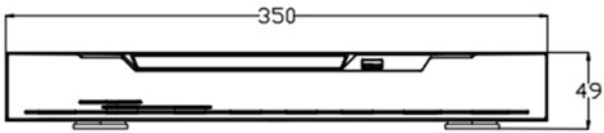

Rear Panel