

# B94

## 1.3MP Outdoor Mini PTZ with D/N, Basic WDR, SLLS, 10x Zoom Lens




- 1.3 Megapixel with 720p
- Day & Night with Superior Low Light Sensitivity
- 10x Zoom Lens with f4.9-49mm / F1.8-3.0, DC Iris, Auto Focus
- Basic WDR (83.5 dB)
- 60 fps at 1280 x 720
- Pan & Tilt
- Weatherproof (IP66) and Vandal Proof (IK10)

### PHOTO INDICATION



### DIMENSION DIAGRAM

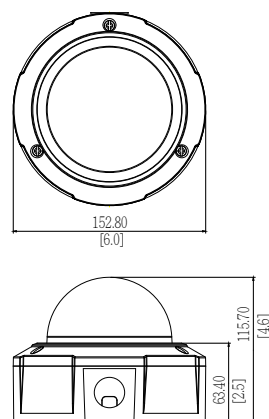

Unit: mm [inch]

### ACCESSORY OPTIONS











#### Dome Cover

PDCX-1104



4-inch, smoke, vandal proof

#### Popular Mounting Solutions

Surface	Accessories not required
Wall	PMAX-0308 
Pendant	PMAX-0101 PMAX-0103  + 
Corner	PMAX-0101 PMAX-0305 PMAX-0402  +  + 
Pole	PMAX-0101 PMAX-0305 PMAX-0503  +  + 
Gang Box	PMAX-0804 

\* For more mounting solutions, please refer to Project Planner on [www.acti.com](http://www.acti.com)

## PRODUCT SPECIFICATION

### B94

#### • Device

Device Type	Outdoor Mini PTZ Camera
Image Sensor	Progressive Scan CMOS
Sensor Size	1/3"
Day / Night	Yes
Superior Low Light Sensitivity	Yes
Minimum Illumination	Color: 0.1 lux at F1.8 (30 IRE, 2400°K); B/W: 0.05 lux at F1.8 (30 IRE, 2400°K)
Color to B/W switch	ISP based switch, configurable
Mechanical IR Cut Filter	Yes
IR Sensitivity Range	700 - 1100nm
IR LED	No
Electronic Shutter	1/5 ~ 1/2,000 sec (manual mode); 1/5 ~ 1/10,000 sec (auto mode)

#### • Lens

Focal Length	Zoom, f4.9- 49 mm / F1.8 - 3.0
Zoom Ratio	10x optical
Zoom Speed	Max 2 secs
Iris	DC iris
Focus	Auto focus
Horizontal Viewing Angle	52.12 - 5.9°

#### • PTZ

Manual Panning Speed	5° - 90°/s
Manual Tilting Speed	5° - 90°/s
Preset Panning Speed	5° - 90°/s
Preset Tilting Speed	5° - 90°/s
Panning Range	-175° - 175°(without auto-flip)
Tilting Range	0° - 180° (with E-flip)
Control	Remote manual control; 256 preset points; 10 preset tours; Auto scan
Preset Panning Accuracy	1.5°
Preset Tilting Accuracy	1.5°
Absolute Position	Yes
Protocol	ACTi URL command, Sony VISCA, Pelco D, Pelco P

#### • Video

Compression	H.264, MJPEG
Max. Frame Rate vs. Resolution	30 fps at 1280 x 960; 60 fps at 1280 x 720; 30 fps at 640 x 480; 15 fps at 320 x 240
Multi-Streaming	Simultaneous dual streams based on two configurations
Bit Rate	28 Kbps - 6 Mbps (per stream)
Bit Rate Mode	Constant, Variable
Image Enhancement	Basic WDR (83.5 dB); White balance: automatic, hold and manual; Brightness; Contrast; Sharpness; Automatic gain control; Digital Noise Reduction; Flickerless
Text Overlay	User defined text on video
Image Orientation	Image flip and mirror

#### • Audio

Audio	2-way
Compression	8 kHz, Mono, PCM, 16 bit encoding; G.711
Audio-In	Terminal block
Audio-Out	Terminal block

#### • Network

Protocol & Service	TCP, UDP, HTTP, HTTPS, DHCP, PPPoE, RTP, RTSP, IPv6, DNS, DDNS, NTP, ICMP, ARP, IGMP, SMTP, FTP, UPnP, SNMP, Bonjour, Sony VISCA, Pelco D, Pelco P
Ethernet Port	1, Ethernet (10/100Base-T), RJ-45 connector
Security	IP address filtering; HTTPS encryption; Password protected user levels; Anonymous login; IEEE 802.1X network access control

#### • Alarm

Alarm Trigger	Video motion detection (3 regions); External device through digital input
Alarm Response	Notify control center; Go to PTZ preset point or preset tour; Change camera settings; Command other devices; E-mail notification with snapshots; Save video or snapshot to local storage; Upload video, Snapshot to FTP server; Activate external device through digital output

#### • Interface

Digital Input	1, Terminal block
Digital Output	1, Terminal block
Local Storage	MicroSDHC/MicroSDXC memory card slot (card not included)

#### • General

Power Source / Consumption	PoE Class 3 (IEEE802.3af) / 12.95 W DC 12V / 10.36 W (adapter not included)
Weight	1263 g ( 2.78 lb)
Dimensions (Φ x H)	153 mm x 116 mm (6" x 4.6")
Environmental Casing	Weatherproof (IP66 rated); Vandal proof (IK10 rated), Transparent dome cover
Mount Type	Surface, Pendant, Wall, Corner, Pole, Flush, Gang box
Starting Temperature	-20°C ~ 50°C (-4°F ~ 122 °F) within 30min
Operating Temperature	-20°C ~ 50°C (-4°F ~ 122 °F)
Operating Humidity	10% ~ 85% RH
Approvals	CE (EN 55022 Class B, EN 55024), FCC (Part15 Subpart B Class B), IP66, IK10, NEMA 4X

#### • Integration

Unified Solution	Fully compatible with ACTi software
ISV Integration	Software Development Kit (SDK) available; ONVIF Compliant
Firmware Access Browser	Microsoft Internet Explorer 8.0 or newer (full functionality); Other browsers with QuickTime installed (partial functionality)