

## HAC-B1A21

2Megapixel 1080P Water-proof HDCVI IR Bullet Camera



### Features

- ☒ 1/2.7" 2Mega pixel CMOS
- ☒ 25/30 fps@ 1080P, 25/30 /50/60 fps@720P
- ☒ High speed, long distance real -time transmission
- ☒ HD and S D switchable
- ☒ OSD Menu, control over coaxial cable
- ☒ DWDR, Day/Night(ICR), AWB, AGC, BLC , 2DNR
- ☒ 3.6mm fixed lens (6mm optional)
- ☒ Max. IR LEDs length 20m, Smart IR
- ☒ IP67, DC12V


# HAC-B1A21

## Technical Specifications


Model	HAC-B1A21	HAC-B1A21
<b>Camera</b>		
Image Sensor	1/2.7" 2Megapixel CMOS	
Effective Pixels	1920(H)×1080(V)	
Electronic Shutter	1/25~1/100000s	1/30~1/100000s
Video Frame Rate	25/50 fps@720P; 25fps@1080P	30/60fps@720P; 30fps@1080P
Synchronization	Internal	
Mini. Illumination	0.02Lux/F2.0, 0Lux IR on	
Video Output	1-channel BNC high definition video output/ CVBS standard definition video output (Can switch )	
<b>Camera Features</b>		
Max. IR LEDs Length	20m, Smart IR	
Backlight Compensation	DWDR	
Day/Night	Auto(ICR) / Color / B/W	
Noise Reduction	2D	
OSD Menu	Support	
<b>Lens</b>		
Focal length	3.6mm (6 mm optional)	
Angle of View	H: 89.9° (59.4°)	
Mount Type	M12	
<b>General</b>		
Power Supply	DC12V± 25%	
Power Consumption	Max 2.8W	
Working Environment	-40°C~+60°C / Less than 95 %RH (no condensation)	
Transmission Distance	Over 500m via 75 -3 coaxial cable	
Ingress Protection	IP67	
Dimensions (W×D×H)	∅ 70mm×154mm	
Weight	0.2kg	
Material	Plastic	

## HAC-B1A21

### Dimensions (mm)

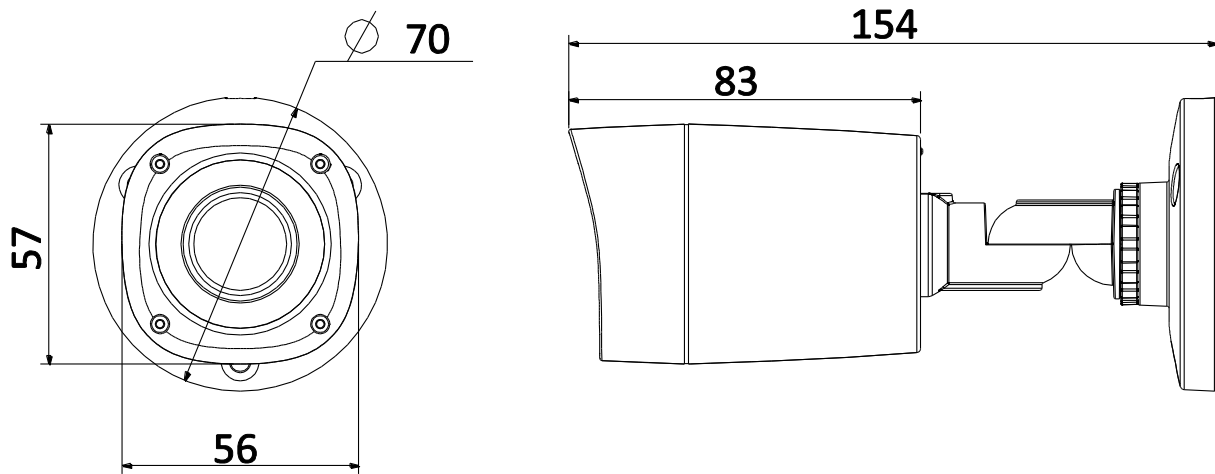

### Accessories (optional)

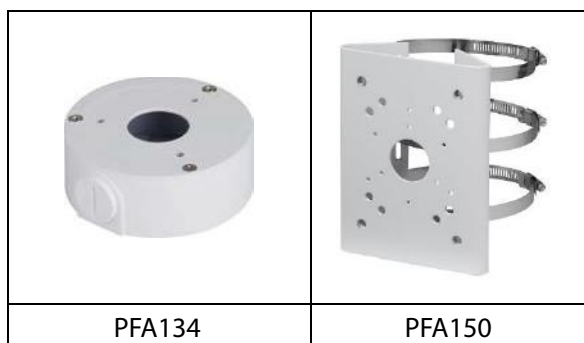

Dahua Technology Co., Ltd.  
1199 BinAn Road, Binjiang District, Hangzhou, China  
Tel: +86 -571-87688883  
Fax: +86 -571-87688815  
Email: [overseas@dahuatech.com](mailto:overseas@dahuatech.com)  
[www.dahuatech.com](http://www.dahuatech.com)

\*Design and specifications are subject to change without notice.

© 2014 Dahua Technology Co., Ltd.