

LMX-0600-V2 Series

6-Port Industrial Light Layer 3 Managed Ethernet Switch with 6*10/100Tx, 12~48VDC Power Input; Version 2 Hardware



Features

- ▶ Supports 6*10/100Tx Fast Ethernet Ports
- ▶ Network Redundancy Support: RSTP, and G.8032 ERPS (Recovery Time <50ms)
- ▶ Configuration: Web Console, Telnet, CLI Command
- ▶ Supports IGMP v1/v2/v3, up to 1024 Groups
- ▶ Supports QoS (IEEE802.1p) and CoS/ToS
- ▶ Supports IEEE802.1Q VLAN, SNMP v1/v2c/v3
- ▶ Redundant Power Input Design: 12~48VDC
- ▶ Reverse Polarity Protection
- ▶ IP30 Protection
- ▶ DIN-Rail or Wall Mountable
- ▶ Operating Temperature Range
 - STD: -10°C to 70°C, EOT: -40°C to 75°C
- ▶ 5-Year Warranty


INTRODUCTION

Antaira Technologies' LMX-0600-V2 series is a 6-port industrial managed Ethernet switch that is embedded with 6*10/100Tx fast Ethernet ports. This series is a fully manageable industrial Ethernet switch pre-loaded with light layer 3 network management software, and supports a user friendly web console interface for easy configuration.

The LMX-0600-V2 series is IP30 rated, DIN-rail mountable, and has two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for any industrial networking application within factory automation, ITS, power/utility, water wastewater, and any other outdoor or harsh environment.

Version 2 hardware is compatible with the latest light layer 3 firmware which permits static routes between VLANs.

DIMENSIONS

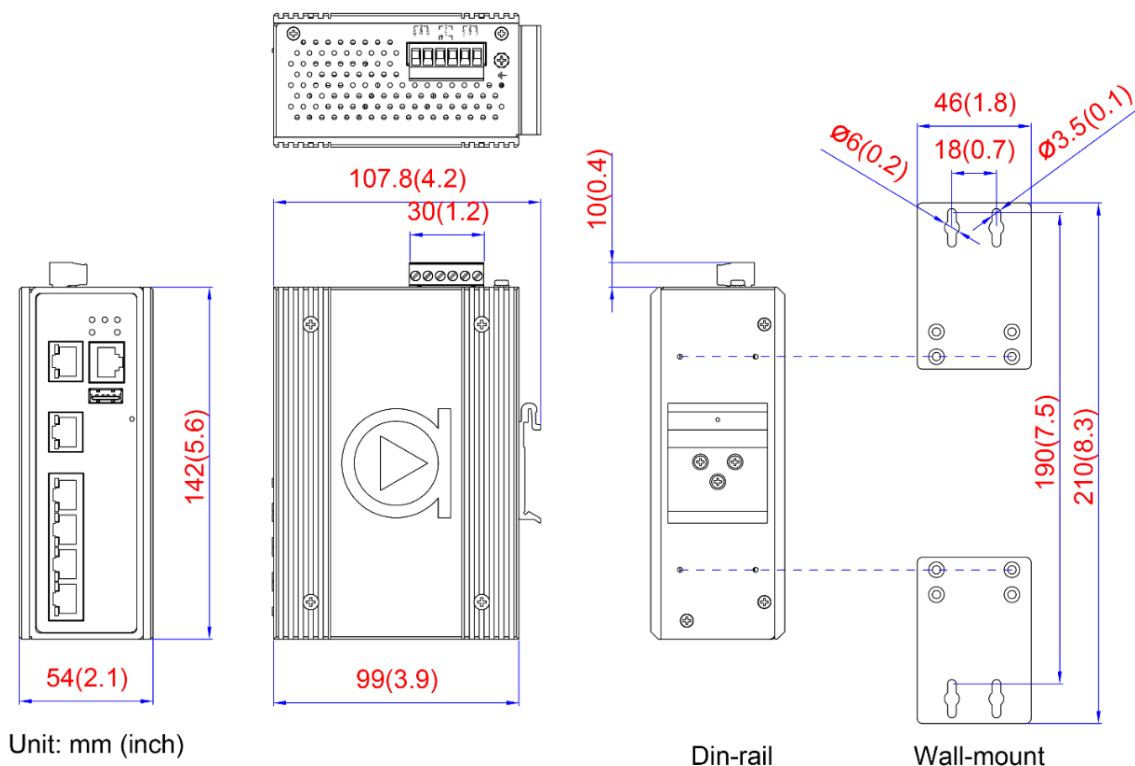

SPECIFICATIONS

Technology	Port/MAC/Protocol/IP Subnet-based VLAN, VLAN trunking, GARP/GVRP, Loop Guard, Link Aggregation static/LACP, BPDU guard, Error disable recovery, IGMPv2/v3 snooping, MLD snooping, IGMP filtering, IPMC throttling / filtering leave proxy, DHCP snooping, ARP, MEP, G.8032 v1/v2
L2 Switching	
L3 Switching	DHCP option82, static routes
QoS	802.1p Queueing, Input priority mapping, Storm control for Unicast/Multicast/Broadcast, Port/Queue/ACL policer, Port egress shaper, Queue egress shaper, DiffServ (DSCP), Tag remarking, Scheduler mode
Power Saving	ActiPHY, PerfectReach, IEEE 802.3az EEE power management
Network Redundancy	STP/RSTP/MSTP, port trunk with LACP, ERPS v1/v2 (<50ms)
Configuration System / Diagnostics	Http, Https, Telnet, SSH, CLI, TFTP, SNMP v3
Switch Properties	Dual Image Protection, PING, PING6
Switch Architecture	Back-Plane (Switching Fabric): 1.2Gbps IPv4/IPv6, SNMP v1/v2c/v3, LLDP, LLDP-MED, HTTP, HTTPS, SSHv2 telnet, DHCP client, DHCPv6 client, DHCP server, Port Mirror, DNS client/proxy, IP based Access Filter, ICMPv6, syslog, Time Zone / Daylight Saving, NTP client, RMON, sFlow, Loop detection, Console Port, Power Lost Warning, Relay Trigger
Protocols	
Priority Queues	8
Processing Type	Store and Forward
Flow Control	IEEE 802.3x flow control, back pressure flow control
Transfer Rate	14,880pps for Ethernet Port 148,800pps for Fast Ethernet Port
Memory Buffer	4Mbits
Jumbo Frame	9.6Kbytes
MAC Table Size	8K
VLAN Group	4095
IGMP Group	1024
Port Interface	
Ethernet Port	6*10/100Base-TX, auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection
RS232 Serial Console	1*RS232 in RJ45
LED Indicators	System: Power 1, Power 2, Master, Ring, Fault Ethernet Ports: Speed/Link/Active

Protection	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m)
Network Cable	100Base-TX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m)
Mechanical Characteristics	
Housing	Metal, IP30 protection
Dimensions	54 x 142 x 99 mm (W x H x D)
Weight	Unit: 1.9 lbs Shipping: 2.7 lbs
Mounting	DIN-Rail mounting, Wall mounting
Power Requirement	
Input Voltage	12~48VDC Redundant Input
Power Connection	1 removable 6-contact terminal block
Relay Contact	24VDC, 1A resistive
Overload Current Protection	Present
Reverse Polarity Protection	Present
System Power Consumption	7.5W
Environmental Limits	
Operating Temperature	STD: -10°C to 70°C EOT: -40°C to 75°C
Storage Temperature	-40°C to 85°C
Ambient Relative Humidity	5% to 95%, (non-condensing)
Regulatory Approvals	
EMI	FCC Part 15 Subpart B Class A, CE EN55032/EN61000-6-4 Class A
EMS	CE EN55035/EN61000-6-2 Class A, IEC61000-4-2,3,4,5,6,8
Free Fall	IEC60068-2-32
Shock	IEC60068-2-27
Vibration	IEC60068-2-6
Green	RoHS Compliant
Certifications	FCC, CE, UL 61010-1, 61010-2-201
Warranty	5 Years

ORDERING INFO

LMX-0600-V2	6-Port Industrial Light Layer 3 Managed Ethernet Switch with 6*10/100Tx, 12~48VDC Power Input; Version 2 Hardware
LMX-0600-T-V2	6-Port Industrial Light Layer 3 Managed Ethernet Switch with 6*10/100Tx, 12~48VDC Power Input; Version 2 Hardware; EOT: -40°C to 75°C