

LNP-0802C-SFP-24 Series

8-Port Industrial PoE+ Gigabit Unmanaged Switch, w/6*10/100Tx (30W per Port), 2*Gigabit Combo Ports (2*10/100/1000Tx-RJ45, and 2*100/1000 SFP Slots); 12~36VDC (Voltage Booster)



Features


- ▶ Supports 6-Port 10/100Tx IEEE 802.3at PoE+ Compliant with 30W per Port, 2*Gigabit Combo Ports (2*10/100/1000Tx RJ45, and 2*100/1000 SFP Slots)
- ▶ Supports Auto MDI/MDI-X Function
- ▶ Store-and-Forward Switching Architecture
- ▶ 8K MAC Address Table
- ▶ Surge Protection: 2,000 VDC Support
- ▶ ESD Protection: 6,000 VDC Support
- ▶ Redundant Power Input Design: 12~36VDC (Voltage Booster)
- ▶ Built-in 1 Relay Output for Power Failure Warning
- ▶ IP30 Rugged Metal Case Design
- ▶ DIN-Rail and Wall Mount Support
- ▶ Operating Temperature Range - STD: -10° to 70°C, EOT: -40° to 75°C
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LNP-0802C-SFP-24 series industrial PoE+ Gigabit unmanaged Ethernet switch series is IP30 rated and DIN-Rail mountable. It comes with 6*10/100Tx Ethernet ports which support IEEE 802.3at with high power PoE up to 30W per port, and 2*GigE combo ports (2*10/100/1000Tx RJ45, and 2*100/1000 SFP slots for fiber).

It provides a high EFT and ESD protection and a dual power input with a low booster voltage power input (12~36VDC). It also provides reverse power polarity protection. In addition, the built-in relay warning function alerts maintainers when power failures occur. There is a wide operating temperature model that supports from -40° to 75°C. This series is a perfectly designed product to fulfill special needs for industrial automation, outdoor and harsh weather environment applications.

DIMENSIONS

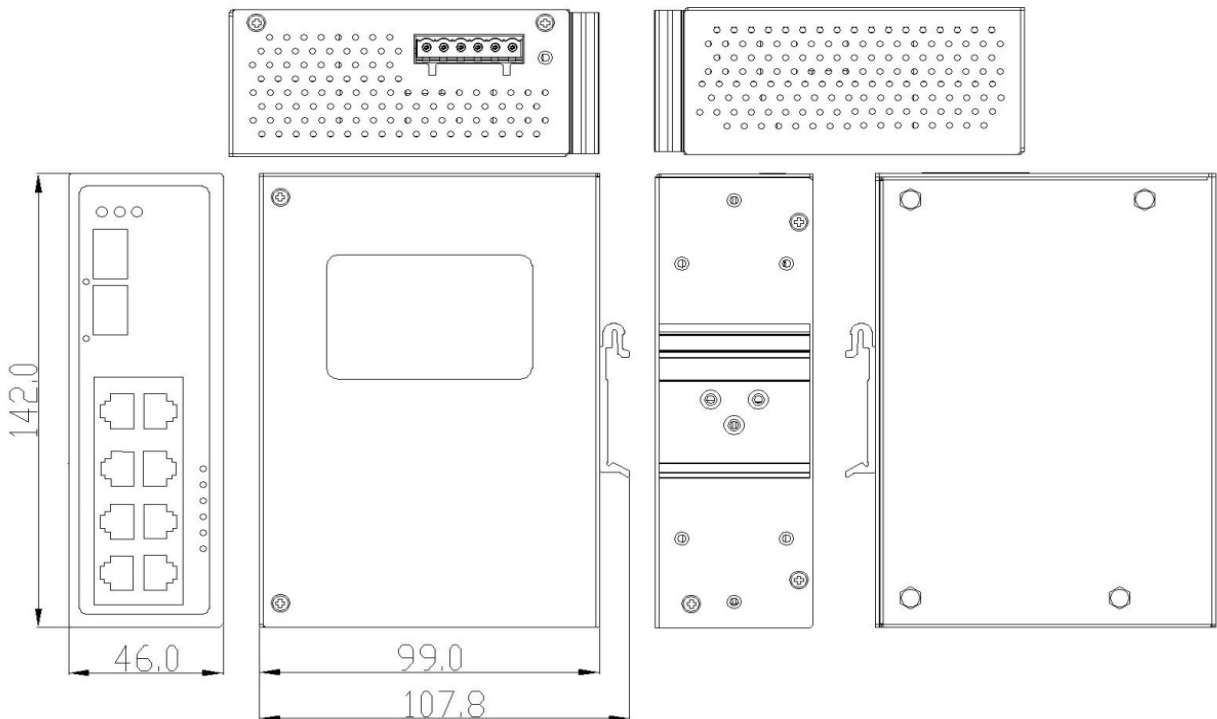

SPECIFICATIONS

Technology		Mechanical Characteristics	
Standards	IEEE 802.3 10BaseTx Ethernet	Housing	Metal, IP30 protection
	IEEE 802.3u 100BaseTx Fast Ethernet	Dimensions	46 x 99 x 142 mm (W*D*H)
	IEEE 802.3ab 1000BaseTx	Weight	Unit 1.5lbs.
	IEEE 802.3z Gigabit Fiber		Shipping Weight 2.0 lbs.
	IEEE 802.3at PoE+	Mounting	DIN-Rail, wall mounting (optional)
Processing Type	Store and Forward	Environmental Limits	
Protocol	CSMA/CD	Operating Temperature	STD: -10° to 70° C EOT: -40° to 75° C
Flow Control	IEEE 802.3x back pressure flow control	Storage Temperature	-40°C ~ 85°C
Switch Properties		Ambient Relative Humidity	5 to 95%, (non-condensing)
Transfer Rate	14,880pps for Ethernet Port	Regulatory Approvals	
	148,800pps for Fast Ethernet Port	EMI	FCC Class A
	1,488,000pps for Gigabit Ethernet Port	EMS	EN61000-4-2,3,4,5,6,8 EN61000-6-2,4
Jumbo Frame	-	Free Fall	IEC60068-2-32
MAC Table Size	8K	Shock	IEC60068-2-27
Interface		Vibration	IEC60068-2-6
Ethernet Port	6*RJ45 Ports w/10/100Tx (PSE 30W/Port)	Green	RoHS Compliant
Gigabit Combo Port	2 *RJ45 Ports w/10/100/1000TX Ethernet	Certifications	FCC, CE, UL 61010-1, UL 61010-2-201, UL Class 1 Division 2, ISA 12.12.01
Copper/SFP	and 2*100/1000 SFP Slot for Fiber		Warranty
PoE Pin Out	V+, V+, V-, V- for pin s 1,2,3,6 Endspan, MDI Alternative A		
Network Cable	10Base Tx: 2-pair UTP/STP Cat. 3,4,5		
	100Base Tx: 2-pair UTP/STP Cat. 5		
	1000Base Tx: 2-pair UTP/STP Cat. 5/5E		
Power Requirements			
Input Voltage	12~36VDC (Voltage Booster), Redundant Input		
Overload Current Protection	Present		
Connection	1 removable 6-contact terminal block		
Reverse Polarity Protection	Yes		
Power Consumption	145 Watts @ 12V		
	200 Watts @ 24V		

ORDERING INFO

LNP-0802C-SFP-24 8-Port Industrial PoE+ Gigabit Unmanaged Switch, w/6*10/100Tx (30W/Port), and 2*Gigabit Combo Ports (2*10/100/1000Tx RJ45, and 2*100/1000 SFP Slots); 12~36VDC

LNP-0802C-SFP-24-T 8-Port Industrial PoE+ Gigabit Unmanaged Switch, w/6*10/100Tx (30W/Port), and 2*Gigabit Combo Ports (2*10/100/1000Tx RJ45, and 2*100/1000 SFP Slots); 12~36VDC; EOT: -40° to 75°C

Optional Accessories

MDR-100-24 100W Industrial Single Output Miniature DIN-Rail Power Supply, 24VDC

DR-120-24 120W Industrial DIN-Rail Power Supply, 24VDC

SDR-120-24 120W Industrial Single Output Miniature DIN-Rail Power Supply, 24VDC

SDR-240-24 240W Industrial Slim & High Efficiency DIN-Rail Power Supply with PFC Function, 24VDC